

# Accessory Design Guidelines for Apple Devices

**Release R11**

# Contents

## Overview 11

### **1. Introduction** 12

### **2. Requirements** 13

### **3. Terminology** 14

  3.1 Device 14

  3.2 Accessory 14

## Accessories 15

### **4. All Accessories** 16

  4.1 Compliance Testing 16

  4.2 Integrated USB Receptacles 16

  4.3 User Supplied Cables and AC Power Adapters 16

  4.4 Attachments 17

  4.5 Magnetic Interference 17

  4.6 Radio Frequency (RF) Performance 18

    4.6.1 Materials and Coatings 18

    4.6.2 Antenna Keep-Out 19

    4.6.3 Over The Air (OTA) Transmission/Reception 19

    4.6.4 Specific Absorption Rate (SAR) 19

    4.6.5 Near Field Communication (NFC) 19

  4.7 Qi Wireless Power 20

### **5. Cases** 21

  5.1 Product Design 21

    5.1.1 Device Protection 21

    5.1.2 Access to Inputs and Interconnects 22

    5.1.3 Dock Compatibility 25

    5.1.4 Qi Wireless Power and Rear Pockets 26

  5.2 Acoustics 26

5.2.1 Call Quality	26
5.2.2 Speaker to Microphone Coupling	26
5.2.3 Speaker/Microphone Openings	26
5.3 Ambient Light Sensor and Proximity Sensor Interference	29
5.4 Taptic Engine	29
5.5 Magnetic Interference	29
5.6 Home Button / Touch ID Sensor	30
5.7 Camera	30
5.7.1 Geometry	30
5.7.2 Color	31
5.7.3 Surface Finish	31
5.7.4 Image Degradation Examples	31
5.8 Reliability	32
5.8.1 Device Insertion and Removal	32
5.8.2 Colorfastness	32
5.9 Environmental	32
5.10 Test Procedures	33
5.10.1 Device Models	33
5.10.2 Product Design	39
5.10.3 Taptic Engine	41
5.10.4 Home Button / Touch ID Sensor Overlays	42
5.10.5 Acoustics	43
<b>6. Covers</b>	45
6.1 Magnetic Interference	45
6.2 Smart Covers	45
<b>7. Screen Overlays</b>	47
7.1 Product Design	47
7.2 Edge Swipe and Edge Press Gestures	47
<b>8. Camera Attachments</b>	48
8.1 Magnetic Interference	48
<b>9. AC Power Adapters</b>	49
9.1 Converter Switching Frequencies	49
9.2 YCAP AC Capacitor	49
9.3 Impedance Stability	49
9.4 Fuse Protection	50
9.5 Short Circuit Response	51

<b>10. Adapters</b>	52
10.1 USB-C to USB Micro-B Adapters	52
<b>11. Battery Packs</b>	53
<b>12. AirPods Accessories</b>	54
<b>13. Watch Bands</b>	55
13.1 Requirements	55
13.2 Example Apple Watch Lug Assembly	58
<b>Features</b>	61
<b>14. Device Power (Lightning)</b>	62
14.1 Direct Power Source	62
14.2 External Power Source	62
14.3 Declaring Capability	63
14.4 Providing Power via USB Connectors	63
14.5 Labeling Multiple Connectors	64
14.6 Fast Charge for iPhone (18 W)	64
14.7 Overcurrent and Short Circuit Protection	65
14.8 Overcurrent and Short Circuit Protection Resets	66
14.9 Power State Changes	66
<b>15. Bluetooth Accessory Identification</b>	67
15.1 HFP Command AT+XAPL	67
<b>16. Bluetooth Headset Battery Level Indication</b>	69
16.1 HFP Command AT+IPHONEACCEV	69
<b>17. Siri</b>	70
17.1 Enabling Custom Siri Commands	70
17.2 Obtaining Siri Availability Information	70
17.2.1 Obtaining Status Information at Connection	70
17.2.2 Receiving Siri Availability Updates from the Device	71
17.3 Initiating a Siri Session	72
17.3.1 Initiating a Session from the Accessory	72
17.3.2 Initiating a Session from the Device	73
17.3.3 Ending a Session from the Accessory	74

17.4 Siri Eyes Free Mode	74
17.4.1 HFP Command AT+APLEFM	75
17.5 Improving Voice Recognition	75
17.5.1 Wide Band Speech Support	76
17.6 Optimizing the Siri Experience	76
17.7 Common Siri Applications	76
17.7.1 Initialization Procedure After Connection is Established	76
17.7.2 Phone Dialing Using Siri	77
17.7.3 Audio Routing and Media Playback Using Siri	78
17.7.4 Turn-By-Turn Directions Using Siri	78
17.8 User Interaction with Siri Eyes Free in a Vehicle	78
17.9 Enabling/Disabling Siri from the Device	80
17.10 Test Procedures	81
17.10.1 Siri Eyes Free	81
 Protocols	85
<b>18. USB Power Capability Vendor Request</b>	86
<b>19. USB D+/D- Resistor Networks</b>	87
19.1 Electrical	87
19.2 Identifying Power Source Current Limit	88
<b>20. USB Power Delivery</b>	90
<b>21. USB-C Current</b>	91
<b>22. Advanced Audio Distribution Profile (A2DP)</b>	92
22.1 Bluetooth A2DP Specification	92
22.1.1 AVDTP Transactions	92
22.2 SubBand Codec (SBC)	92
22.3 MPEG 2/4 AAC Codecs	93
22.4 Test Procedures	94
22.4.1 Audio Quality	94
22.4.2 Audio Switching	94
22.4.3 HFP Interaction	94
22.4.4 Siri	94
22.4.5 Video Playback	94

**23. iAP2 Protocol** 96

Transports 97

**24. Bluetooth** 98

24.1 Enhanced Data Rate	98
24.2 Adaptive Frequency Hopping	98
24.3 Sniff Mode for Low Power Consumption	98
24.4 Role and Topology Management	99
24.5 Extended Inquiry Response	100
24.6 Secure Simple Pairing	100
24.7 Pairing Button	101
24.8 Class of Device (CoD)	101
24.9 Link Supervision Timeout	101
24.10 Delay Reporting	102
24.11 Profiles	102
24.11.1 Device ID Profile (DID)	102
24.11.2 Service Discovery Protocol (SDP)	103
24.11.3 Hands-Free Profile (HFP)	103
24.11.4 Message Access Profile (MAP)	105
24.11.5 Audio/Video Remote Control Profile (AVRCP)	106
24.11.6 Advanced Audio Distribution Profile (A2DP)	108
24.12 Audio Routing	108
24.12.1 Audio Data Received via HFP Profile	108
24.12.2 Audio Data Received via A2DP Profile	108
24.13 HID	110

**25. Bluetooth Low Energy (BLE)** 111

25.1 Role	111
25.2 Advertising Channels	111
25.3 Advertising PDU	111
25.4 Advertising Data	111
25.5 Advertising Interval	112
25.6 Connection Parameters	113
25.7 Data Packet Length Extension	113
25.8 Privacy	114
25.9 Permissions	114
25.10 Pairing	114
25.11 MTU Size	115

25.12 Services	115
25.12.1 Generic Access Profile Service	115
25.12.2 Generic Attribute Profile Service	115
25.12.3 Device Information Service	116
25.12.4 Available Services	116
25.13 GATT Server	116
Connectors	118
<b>26. USB-A Receptacle</b>	119
26.1 Mechanical	119
26.2 Electrical	119
<b>27. USB-C Plug</b>	120
27.1 Mechanical	120
27.2 Electrical	120
27.3 Test Procedures	121
27.3.1 Connector Test ID	121
27.3.2 Drawing Power	121
<b>28. USB-C Receptacle</b>	122
28.1 Mechanical	122
28.2 Electrical	122
28.2.1 Drawing Power	122
28.2.2 Providing Power	123
28.3 Test Procedures	123
28.3.1 Connector Test ID	123
28.3.2 Drawing Power	123
28.3.3 Providing Power	124
References	125
<b>29. Device Dimensional Drawings</b>	126
29.1 iPhone 11 Pro Max	129
29.2 iPhone 11 Pro	130
29.3 iPhone 11	131
29.4 iPhone XS Max	132
29.5 iPhone XS	133

29.6 iPhone XR	134
29.7 iPhone X	135
29.8 iPhone 8 Plus	136
29.9 iPhone 8	137
29.10 iPhone 7 Plus	138
29.11 iPhone 7	139
29.12 iPhone 6s Plus	140
29.13 iPhone 6s	141
29.14 iPhone 6 Plus	142
29.15 iPhone 6	143
29.16 iPhone 5s & iPhone SE	144
29.17 iPhone 5c	145
29.18 iPhone 5	146
29.19 iPad (7th generation) 1 of 3	147
29.20 iPad (7th generation) 2 of 3	148
29.21 iPad (7th generation) 3 of 3	149
29.22 iPad Air (3rd generation) with Wi-Fi 1 of 3	150
29.23 iPad Air (3rd generation) with Wi-Fi 2 of 3	151
29.24 iPad Air (3rd generation) with Wi-Fi 3 of 3	152
29.25 iPad Air (3rd generation) with Wi-Fi + Cellular 1 of 3	153
29.26 iPad Air (3rd generation) with Wi-Fi + Cellular 2 of 3	154
29.27 iPad Air (3rd generation) with Wi-Fi + Cellular 3 of 3	155
29.28 iPad mini (5th generation) with Wi-Fi 1 of 3	156
29.29 iPad mini (5th generation) with Wi-Fi 2 of 3	157
29.30 iPad mini (5th generation) with Wi-Fi 3 of 3	158
29.31 iPad mini (5th generation) with Wi-Fi + Cellular 1 of 3	159
29.32 iPad mini (5th generation) with Wi-Fi + Cellular 2 of 3	160
29.33 iPad mini (5th generation) with Wi-Fi + Cellular 3 of 3	161
29.34 iPad Pro (12.9-inch) 3rd Generation 1 of 3	162
29.35 iPad Pro (12.9-inch) 3rd Generation 2 of 3	163
29.36 iPad Pro (12.9-inch) 3rd Generation 3 of 3	164
29.37 iPad Pro (11-inch) 1 of 3	165
29.38 iPad Pro (11-inch) 2 of 3	166
29.39 iPad Pro (11-inch) 3 of 3	167
29.40 iPad Pro (12.9-inch) 2nd Generation with Wi-Fi	168
29.41 iPad Pro (12.9-inch) 2nd Generation with Wi-Fi + Cellular	169
29.42 iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 1 of 2	170
29.43 iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 2 of 2	171
29.44 iPad Pro (10.5-inch) with Wi-Fi	172

29.45 iPad Pro (10.5-inch) with Wi-Fi + Cellular	173
29.46 iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 1 of 2	174
29.47 iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 2 of 2	175
29.48 iPad (5th and 6th generation) with Wi-Fi + Cellular	176
29.49 iPad (5th and 6th generation) Magnet/Hall Effect Sensors 1 of 2	177
29.50 iPad (5th and 6th generation) Magnet/Hall Effect Sensors 2 of 2	178
29.51 iPad Pro (9.7-inch) with Wi-Fi	179
29.52 iPad Pro (9.7-inch) with Wi-Fi + Cellular	180
29.53 iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 1 of 2	181
29.54 iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 2 of 2	182
29.55 iPad Pro (12.9-inch) 1st Generation with Wi-Fi	183
29.56 iPad Pro (12.9-inch) 1st Generation with Wi-Fi + Cellular	184
29.57 iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 1 of 2	185
29.58 iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 2 of 2	186
29.59 iPad mini 4 with Wi-Fi	187
29.60 iPad mini 4 with Wi-Fi + Cellular	188
29.61 iPad mini 4 Magnet/Hall Effect Sensors	189
29.62 iPad Air 2 with Wi-Fi	190
29.63 iPad Air 2 with Wi-Fi + Cellular	191
29.64 iPad mini 2 & iPad mini 3 with Wi-Fi	192
29.65 iPad mini 2 & iPad mini 3 with Wi-Fi + Cellular	193
29.66 iPad Air with Wi-Fi	194
29.67 iPad Air with Wi-Fi + Cellular	195
29.68 iPad mini with Wi-Fi	196
29.69 iPad mini with Wi-Fi + Cellular	197
29.70 iPad (4th generation) with Wi-Fi	198
29.71 iPad (4th generation) with Wi-Fi + Cellular	199
29.72 iPod touch (6th generation) & iPod touch (7th generation)	200
29.73 iPod touch (5th generation)	201
29.74 Apple Watch Series 5, 44 mm	202
29.75 Apple Watch Series 5, 40 mm	203
29.76 Apple Watch Series 5 Ceramic, 44 mm	204
29.77 Apple Watch Series 5 Ceramic, 40 mm	205
29.78 Apple Watch Series 4, 44 mm	206
29.79 Apple Watch Series 4, 40 mm	207
29.80 Apple Watch Series 3 Ceramic, 42 mm	208
29.81 Apple Watch Series 3 Ceramic, 38 mm	209
29.82 Apple Watch Series 3 Metal, 42 mm	210
29.83 Apple Watch Series 3 Metal, 38 mm	211

29.84 Apple Watch Series 2 Ceramic, 42 mm	212
29.85 Apple Watch Series 2 Ceramic, 38 mm	213
29.86 Apple Watch Series 2 Metal, 42 mm	214
29.87 Apple Watch Series 2 Metal, 38 mm	215
29.88 Apple Watch (1st generation) & Apple Watch Series 1, 42 mm	216
29.89 Apple Watch (1st generation) & Apple Watch Series 1, 38 mm	217
29.90 AirPods Pro Wireless Charging Case	218
29.91 AirPods Wireless Charging Case	219
29.92 AirPods	220
<b>Revision History</b>	221
Added Content	221
Updated Content	221

# Overview

# 1. Introduction

---

**Note:** These Accessory Design Guidelines for Apple Devices ('Guidelines') are subject to the terms and conditions set forth on the final page of this document. By downloading, accessing, or otherwise utilizing these Guidelines, you agree to be bound by, and only utilize the Guidelines in accordance with, such terms and conditions.

---

These guidelines address:

- The physical design of cases, covers, screen overlays, and camera attachments for iOS devices.
- The specifications for hardware accessories that use the Bluetooth transport to communicate with iOS devices and Mac computers.
- The design of AC power adapters, battery packs, and Qi wireless power transmitters for iOS devices.
- The physical design of band accessories that are compatible with Apple Watch.

These guidelines do not address other aspects of accessory communication with iOS, tvOS, or watchOS devices. Instead, see the MFi Program (<https://developer.apple.com/programs/mfi/>).

## 2. Requirements

This specification contains statements that are incorporated by reference into legal agreements between Apple and its licensees. The use of the words *must*, *must not*, *required*, *shall*, *shall not*, *should*, *should not*, *recommended*, *not recommended*, *may*, *optional*, and *deprecated* in a statement have the following meanings:

- *must*, *shall*, or *required* means the statement is an absolute requirement.
- *must not*, *shall not* or *prohibited* means the statement is an absolute prohibition.
- *should* or *recommended* means the full implications must be understood before choosing a different course.
- *should not* or *not recommended* means the full implications must be understood before choosing this course.
- *may* or *optional* means the statement is truly optional, and its presence or absence cannot be assumed.
- *deprecated* means the statement is provided for historical purposes only and is equivalent to 'must not'.

The absence of requirements, recommendations, or permissions for a specific accessory design in this specification must not be interpreted as implied approval of that design. Developers are strongly encouraged to ask Apple for feedback on accessory designs that are not explicitly mentioned in this specification.

# 3. Terminology

## 3.1 Device

*Device* refers to an iPhone, iPad, or iPod.

*iOS device* refers to an iPhone or iPod running iOS.

*iPadOS device* refers to an iPad running iPadOS.

Where appropriate, specific Apple product and operating system references will also be used.

## 3.2 Accessory

*Accessory* refers to any product that connects to a *device* via the interfaces described in this specification.

# Accessories

# 4. All Accessories

The requirements in this section apply to all accessories regardless of their feature sets.

## 4.1 Compliance Testing

Accessories must not assume that evidence of functionality when attached to a device means the accessory is compliant with this specification. Such an approach does not account for future devices or software releases and runs a high risk of depending on un-documented device behavior that is subject to change at any time.

If available, accessories should validate their design and implementation using the recommended test procedures for all supported features.

## 4.2 Integrated USB Receptacles

Accessories that incorporate a USB receptacle for the purpose of drawing power from an external USB power source must meet the following requirements:

- USB-B receptacles must comply with the *USB Battery Charging 1.2* specification.
- USB-C receptacles must comply with the requirements in [Drawing Power](#) (page 122).

## 4.3 User Supplied Cables and AC Power Adapters

Accessories that can reasonably be used with user-supplied cables and/or AC power adapters must be designed to work with any cable, AC power adapter, or battery pack that is compliant with this specification, see [AC Power Adapters](#) (page 49), and [Battery Packs](#) (page 53), including Apple branded cables and AC power adapters. Such accessories must not declare compatibility only with Apple branded USB cables or AC power adapters.

This compatibility requirement applies to all aspects of user-supplied cables and power adapters. For example:

## 4. All Accessories

### 4.4 Attachments

---

- Connector receptacles on accessories must accommodate all spec-compliant connector overmolds, and any accessory opening surrounding the Lightning receptacle on a device must provide sufficient clearance for spec-compliant connector overmolds.
- Accessories must work with all cables that comply with the specification with regards to electrical DCR and SI.

---

**Note:** Such accessories must be tested with a wide variety of spec-compliant cables (including various lengths of the same cable if applicable) and AC power adapters during accessory development, in addition to Apple branded cables and AC power adapters.

---

## 4.4 Attachments

Accessories must remain compliant with the specification when connected to any attachments designed for that accessory.

Examples of accessory attachments include, but are not limited to:

- Car or desk mounts for a case accessory.
- Wireless charging mats for a Lightning dongle or case accessory.
- Detachable barcode scanners/credit card readers for a Lightning dock accessory.

## 4.5 Magnetic Interference

Apple recommends avoiding the use of magnets and metal components in accessories.

All accessories claiming compatibility with a device that has a digital compass (magnetometer) must minimize interference with the digital compass and must not repeatedly trigger compass recalibration.

All accessories claiming compatibility with a device that has rear camera autofocus (AF) and/or optical image stabilization (OIS) features must not affect the operation of these features.

This following devices feature optical image stabilization:

- iPhone 11 Pro Max
- iPhone 11 Pro
- iPhone 11
- iPhone XS Max
- iPhone XS
- iPhone XR
- iPhone X

## 4. All Accessories

### 4.6 Radio Frequency (RF) Performance

---

- iPhone 8 Plus
- iPhone 8
- iPhone 7 Plus
- iPhone 7
- iPhone 6s Plus
- iPhone 6 Plus
- iPad Pro (12.9-inch) 3rd Generation
- iPad Pro (11-inch)
- iPad Pro (12.9-inch) 2nd Generation
- iPad Pro (10.5-inch)

## 4.6 Radio Frequency (RF) Performance

This section contains RF performance requirements and recommendations for all accessories.

### 4.6.1 Materials and Coatings

Accessories should avoid use of:

- Metals
- Conductive materials or coatings
- Materials with high dielectric (permittivity >5 F/m)

Such materials absorb radio frequency energy and may impair or degrade the performance of antennas for cellular communication, GPS, Wi-Fi, Bluetooth, and NFC.

Examples include (but are not limited to) the following:

- Steel, aluminum, magnesium, titanium, etc.
- Plastics with any carbon content
- Plastics with any glass content
- Plastics with metallic plating
- Metallic paints
- Black paints with high carbon loading
- White paints with high titanium dioxide loading
- Metallic Physical Vapor Deposition (PVD) coatings

## 4. All Accessories

### 4.6 Radio Frequency (RF) Performance

---

#### 4.6.2 Antenna Keep-Out

Antenna keep-out regions can be found in the device dimensional drawings, see [Device Dimensional Drawings](#) (page 126).

Accessory materials or coatings that absorb radio frequency energy, see [Materials and Coatings](#) (page 18), in the antenna keep-out region have a higher risk of degrading device wireless performance.

#### 4.6.3 Over The Air (OTA) Transmission/Reception

Accessories must not excessively degrade the device's RF transmission efficiency. This can be quantified by measuring Total Radiated Power (TRP) across all of the device's operating bands.

Accessories must not excessively degrade the device's RF reception sensitivity. This can be quantified by measuring Effective Isotropic Sensitivity (EIS) across all of the device's operating bands.

Accessories may have a higher risk of excessively degrading device RF performance if they:

- Contain magnets.
- Intrude on device antenna keep-out zones, see [Antenna Keep-Out](#) (page 19).
- Contain active electronic circuitry, such as:
  - Bluetooth radios.
  - Switched-mode power supplies.
  - High speed data interfaces.

All accessory configurations must be taken into account when designing for maximum RF compatibility.

Examples include, but are not limited to:

- Accessory on/off.
- Accessory open/closed.
- Attachment present/not present, see [Attachments](#) (page 17).

A list of labs that can perform OTA testing with devices is available. See the document "MFi Authorized Test Labs" in the "Technical Reference" section of the MFi Portal.

#### 4.6.4 Specific Absorption Rate (SAR)

A list of labs that can perform SAR testing with devices is available. See the document "SAR Test Services" in the "Technical Reference" section of the MFi Portal.

#### 4.6.5 Near Field Communication (NFC)

Accessories that intrude on device [Antenna Keep-Out](#) (page 19) zones and claim compatibility with a device with NFC must not degrade device NFC transaction performance.

The following devices are NFC enabled:

- iPhone 11 Pro Max
- iPhone 11 Pro
- iPhone 11
- iPhone XS Max
- iPhone XS
- iPhone XR
- iPhone X
- iPhone 8 Plus
- iPhone 8
- iPhone 7 Plus
- iPhone 7
- iPhone SE
- iPhone 6s Plus
- iPhone 6s
- iPhone 6 Plus
- iPhone 6

## 4.7 Qi Wireless Power

Accessories that incorporate a Qi transmitter or receiver must be certified according to *The Qi Wireless Power Transfer System, Power Class 0 Specification*, version 1.2.4, see <https://www.wirelesspower-consortium.com>.

# 5. Cases

Accessories that substantially enclose devices must comply with the requirements stated in this chapter unless the accessory supports other features in this specification whose requirements conflict with the requirements in this chapter.

If the accessory has multiple user-detachable components that substantially enclose the device, the requirements and/or overrides must be applied to each component separately.

## 5.1 Product Design

A well-designed case will securely house a device while not interfering with the device's operation. Significant factors in mechanical design include access to the device's sensors, controls, and connectors. Dimensional drawings for devices can be found in [Device Dimensional Drawings](#) (page 126).

### 5.1.1 Device Protection

Cases must protect the device from a 1 m drop onto a hard paved surface in any device orientation. Specifically, exposed glass on the device must not come within 1 mm of a flat surface, such as a table or floor, in any orientation when the case is attached. This may be achieved by either covering the exposed glass or creating features around it that will space the exposed glass at least 1 mm away from the flat surface.


Care should be given to the design of the bottom of the case to achieve both device protection and access to device speakers, microphones, and connectors. For example, the bottom of iPhone X cases should:

- Not have an opening wider than 50 mm, see dimension A in [Figure 5-1](#) (page 22).
- Be made of polycarbonate (PC) at least 1.15 mm thick, see dimension B in [Figure 5-1](#) (page 22).

## 5. Cases

### 5.1 Product Design

**Figure 5-1** Device Protection

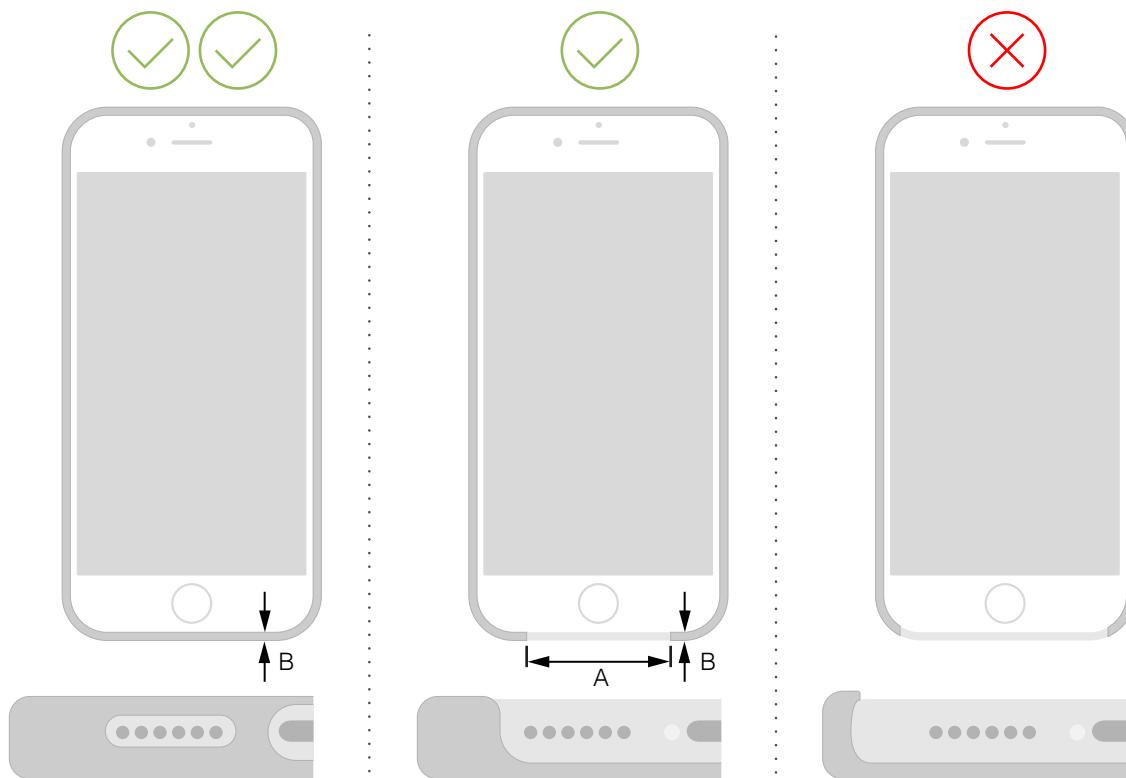

### 5.1.2 Access to Inputs and Interconnects

The accessory must readily permit the user to access inputs and interconnects.

#### 5.1.2.1 Access to Controls

The accessory must readily permit the user to access and operate the device's mechanical controls, such as:

- Volume buttons
- Ring/Silent switch
- Side button
- Home/Touch ID sensor
- Home button
- Sleep/Wake button

#### 5.1.2.2 Access to the Headset Jack

The case must provide ready access to a device's headset jack (if present).

The headset jack opening (i.e., keep-out area):

## 5. Cases

### 5.1 Product Design

---

- Must be at least 6.0 mm in diameter and at most 14.0 mm deep.
- Should be at least 6.5 mm in diameter and at most 10.0 mm deep for best compatibility with a range of headsets.

Headset jack openings must be designed with enough margin to compensate for shifting or dimensional changes of the accessory material.

#### 5.1.2.3 Access to the Lightning Connector

If the case is for a device with the Lightning connector, the opening (i.e., keep-out area):

- Must be at least 12.05 mm by 6.30 mm with full radii rounded edges.
- Should be at least 13.65 mm by 6.85 mm for best compatibility with a range of cables and docks.

Lightning connector openings must be designed with enough margin to compensate for shifting or dimensional changes of the accessory material.


#### 5.1.2.4 Access to the Smart Connector

Accessories that do not make use of the Smart Connector must not expose it.

#### 5.1.2.5 Touchscreen

The accessory should not have any edges that can collect water on the touchscreen area when the device is held at a 30° angle relative to the horizon.

Accessories must allow a 120° opening along the edges of the active area of the touchscreen to ensure compatibility with the device touchscreen features. See [Figure 5-2](#) (page 24) for more information on the keep-out and [Device Dimensional Drawings](#) (page 126) device specific active display areas.

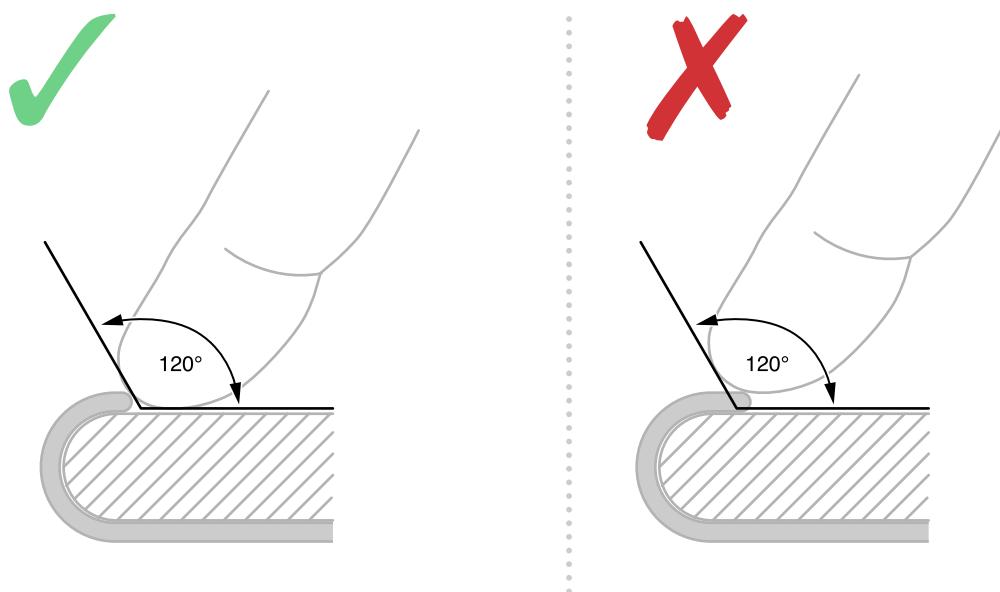**Figure 5-2** Touchscreen keep-out area

### 5.1.2.6 Edge Swipe Gestures

Users must be able to easily use edge swipe gestures.

Examples of such gestures include, but are not limited to:

- Swipe in from the top edge for Control Center or Notification Center.
- Swipe in from the bottom edge for Home, App Switcher, or Reachability.
- Swipe in from the left edge in Messages or Mail to go back from a conversation.

The following devices make extensive use of edge swipe gestures in both portrait and landscape orientations:

- iPhone 11 Pro Max
- iPhone 11 Pro
- iPhone 11
- iPhone XS Max
- iPhone XS
- iPhone XR
- iPhone X
- iPad Pro (12.9-inch) 3rd Generation
- iPad Pro (11-inch)

### 5.1.2.7 Edge Press Gestures

Users must be able to easily use edge press gestures.

## 5. Cases

### 5.1 Product Design

---

The following devices support edge press gestures:

- iPhone 8 Plus
- iPhone 8
- iPhone 7 Plus
- iPhone 7
- iPhone 6s Plus
- iPhone 6s

An edge press gesture from the left is used to bring up the task switcher in iOS 9.0 and later.

#### 5.1.2.8 Cover Glass Contact

Cases that claim compatibility with the following devices should not contact the cover glass as defined in their dimensional drawings:

- iPhone 11 Pro Max
- iPhone 11 Pro
- iPhone 11
- iPhone XS Max
- iPhone XS
- iPhone XR
- iPhone X
- iPhone 8 Plus
- iPhone 8
- iPhone 7 Plus
- iPhone 7
- iPhone 6s Plus
- iPhone 6s
- iPhone 6 Plus
- iPhone 6

See [Device Dimensional Drawings](#) (page 126).

#### 5.1.3 Dock Compatibility

The distance from bottom of the device to the outside of a case should not exceed 1.8 mm. This improves compatibility with Lightning docks such as the Apple iPhone Lightning Dock.

## 5.1.4 Qi Wireless Power and Rear Pockets

Cases that claim compatibility with the Qi wireless power feature in devices must not have rear pockets or holders for credit cards, RFID cards, or other similar items. Cards may be damaged and/or impact wireless charging performance.

# 5.2 Acoustics

The accessory must not impair or degrade the acoustic performance of a device.

## 5.2.1 Call Quality

The accessory must not impair or degrade the user's experience making and receiving both audio calls over a cellular network or audio/video calls using FaceTime in both handset and speakerphone modes. The accessory should not change the frequency response of the speakers or microphones. In addition, the user should not hear any distortion or echo resulting from the accessory.

The accessory must not obstruct any microphones during a phone call. Note that occluding any microphones can result in call quality degradation.

## 5.2.2 Speaker to Microphone Coupling

Cases must not facilitate the conduction of sound from any speaker to any microphone. Such sound conduction may cause echoing in phone calls.


## 5.2.3 Speaker/Microphone Openings

Device speaker/microphone port locations vary from model to model, see [Device Dimensional Drawings](#) (page 126).

### 5.2.3.1 Thin Cases ( $\leq 2.25$ mm)


Microphone/speaker openings in thin cases should:

- Be offset at least 2.0 mm from the edge of any device speaker/microphone port.
- Be at most 1.5 mm thick along their inner diameter.
- Have a maximum 45° incoming angle to their inner diameter.
- Maintain a proper seal against the device between speaker/microphone ports.

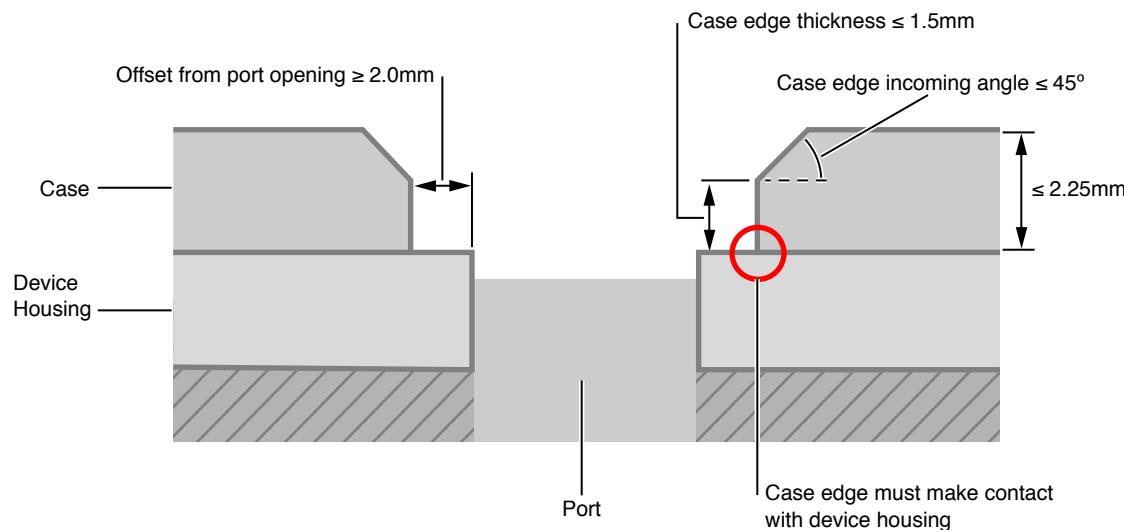**Figure 5-3** Microphone/speaker opening recommendations for thin cases

### 5.2.3.2 Thick Cases ( $>2.25\text{ mm}$ )

Speaker and microphone openings should be channeled independently and without interruption to/from the outside surface of a thick case.

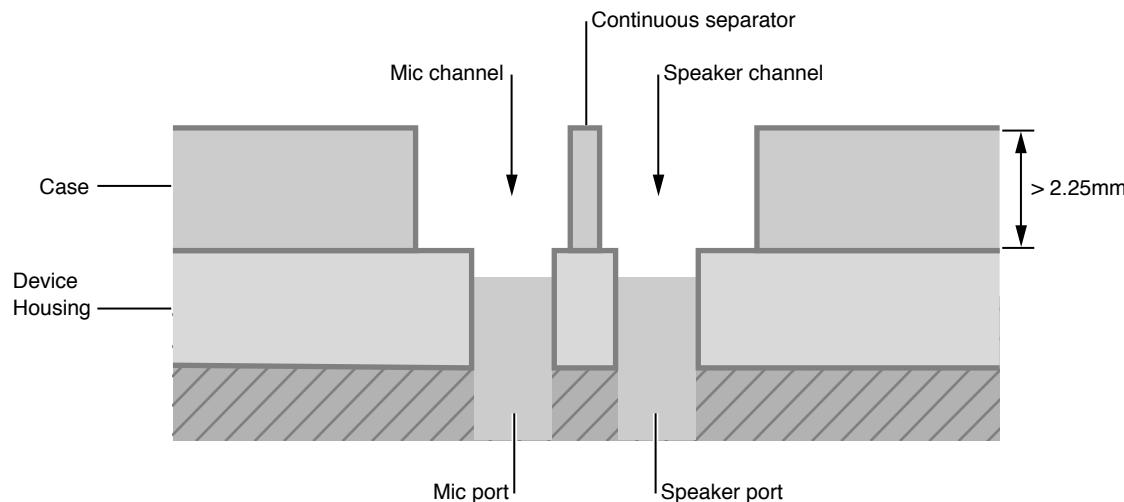
**Figure 5-4** Thick case acoustic channels

Thick cases should maximize exit separation between speaker and microphone channels.

## 5. Cases

### 5.2 Acoustics


**Figure 5-5** Thick case microphone and speaker exit separation

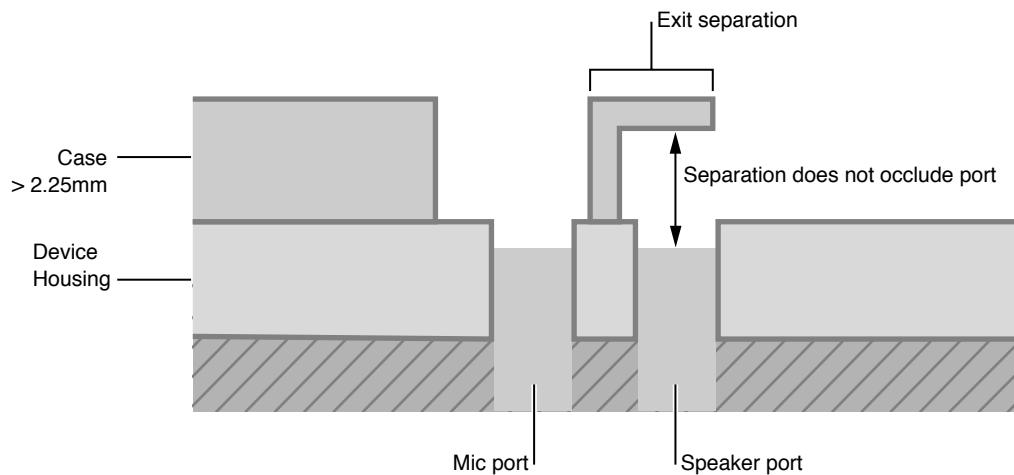

Thick case channels may act as a resonant chamber and detune microphone/speaker frequency response. The resulting frequency response may vary according to channel size/shape.

If a thick case does not maintain a proper seal against the device between microphone/speaker channels, the case itself may become an acoustic chamber.

**Figure 5-6** Improper thick case seal

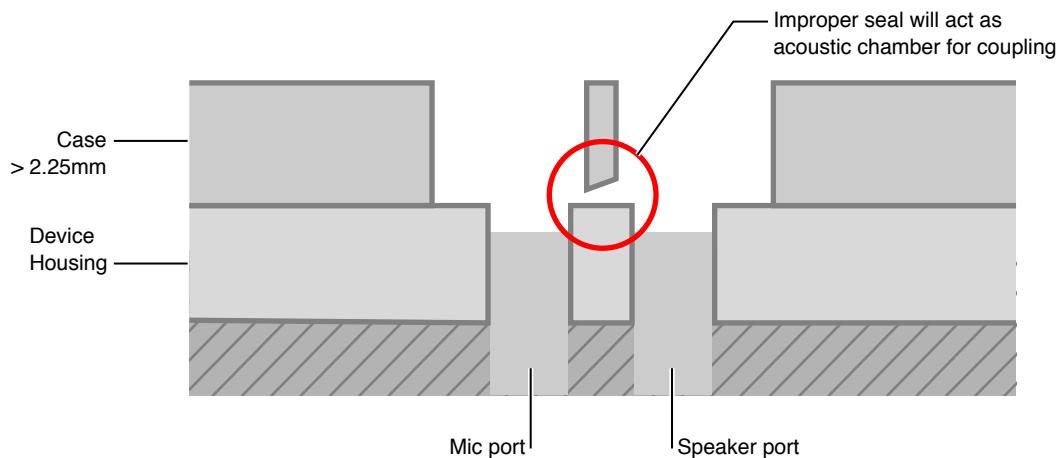

## 5. Cases

### 5.3 Ambient Light Sensor and Proximity Sensor Interference

---

## 5.3 Ambient Light Sensor and Proximity Sensor Interference

The ambient light sensor and proximity sensor locations for various devices are shown in the dimensional drawings cited in [Device Dimensional Drawings](#) (page 126). Some of the dimensional drawings specify a recommended keep-out area around these sensors. No material must be allowed to cover these sensors or their keep-out areas, this includes films and privacy screens. Accessories that allow the device to slide around must not obstruct any sensors.

## 5.4 Taptic Engine

Accessories should not cause substantial change in the feel of the device's Taptic Engine.

The following devices contain a Taptic Engine:

- iPhone 11 Pro Max
- iPhone 11 Pro
- iPhone 11
- iPhone XS Max
- iPhone XS
- iPhone XR
- iPhone X
- iPhone 8 Plus
- iPhone 8
- iPhone 7 Plus
- iPhone 7
- iPhone 6s Plus
- iPhone 6s

## 5.5 Magnetic Interference

Cases must not interfere with the device's:

- Magnetic compass.
- Rear camera autofocus.
- Rear camera optical image stabilization (OIS), if present.

See [Magnetic Interference](#) (page 17) for additional details.

## 5.6 Home Button / Touch ID Sensor

Accessories must not inhibit use of the device's Home button / Touch ID sensor including features such as Touch ID fingerprint recognition.

Home button / Touch ID sensor keep-outs for devices can be found in [Device Dimensional Drawings](#) (page 126).

Additionally, accessories that overlay the iPhone 8 Plus, iPhone 8, iPhone 7 Plus, and iPhone 7 Home button / Touch ID sensor may cause users to have difficulty using the Home button / Touch ID sensor.

## 5.7 Camera

The field of view (FOV) of the camera and the illumination provided by the flash are designed for each device camera. It is imperative that manufacturers consult technical specifications released for each device and do not assume these parameters are shared between devices.

Images from the camera may be affected by the geometry, color, and surface finish of the accessory openings for camera and applicable flash.

### 5.7.1 Geometry

The camera lens FOV must not be blocked. Making the accessory opening too small around the camera and flash may block the FOV of the lens and the illumination from the flash. Blocking the FOV may cause vignetting in the image, where one or more corners of the image reproduced are darker than the center. Blocking marginal rays just outside the FOV of the lens may also reduce the sharpness and contrast of the image. Blocking the illumination from the flash may cause haze in the image, which resulting in reduced contrast. See [Device Dimensional Drawings](#) (page 126) for the camera keep-out.

The accessory opening must not be designed in a way that directs stray light into the camera. If the opening is too narrow or too steep, it may reflect light into the camera, washing out the image or adding an unwanted color cast. Adding a chamfer to the accessory opening trim may help to direct stray light away from the camera. Additionally, where the product is equipped with a flash, a narrow or steep opening may reflect light from the accessory opening back into the camera. This may cause the image to appear washed out or contain unwanted artifacts. Designers should ensure that the mechanical keep-outs outlined in the [Device Dimensional Drawings](#) (page 126) are maintained with worst-case X-Y placement tolerances to minimize the risk of haze.

## 5.7.2 Color

Any light reflected from the accessory may pick up the color of the accessory. Black material or black coating may help avoid color bleeding into the camera from an external light source or the flash. The darker the color, the less light may be reflected from the source into the camera.

---

**Note:** Apple recommends a semi-gloss black material or coating around the camera and flash opening.


---

## 5.7.3 Surface Finish


The flash is a strong source of light and reflections from the camera accessory opening trim should be managed so that they do not reflect back into the camera. Semi-gloss material may direct light away from the camera. Matte or diffuse materials scatter light in all directions and will increase the likelihood that light from the flash or strong light sources in the scene is reflected into the camera.

## 5.7.4 Image Degradation Examples


**Figure 5-7** Sample image degradation by image blocking in ambient condition

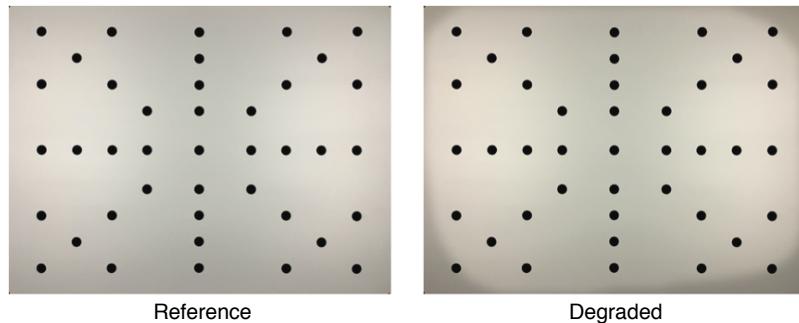

**Figure 5-8** Sample image degradation by color shift through accessory with strong color

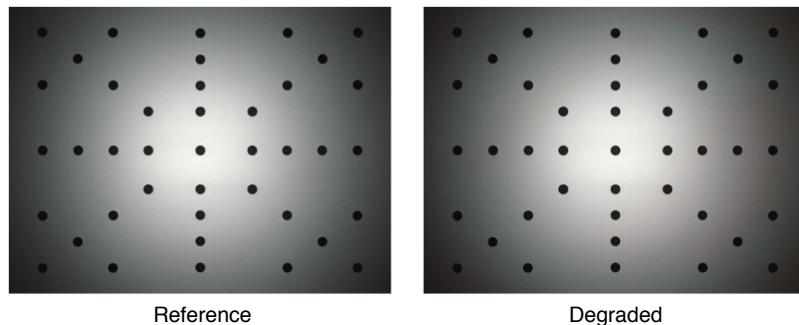

**Figure 5-9** Sample image degradation by flash interference

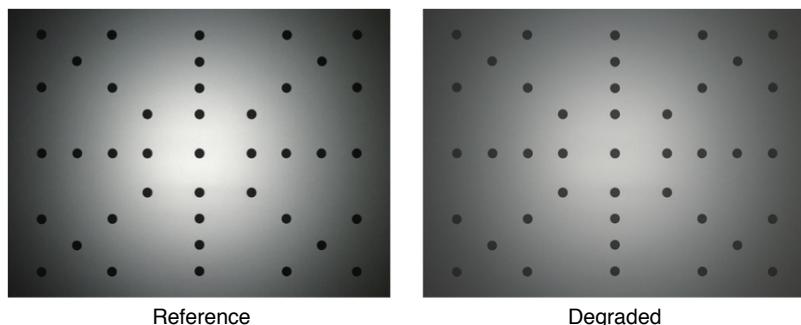

## 5.8 Reliability

Cases for devices must be tested to verify that they will withstand long-term use under typical use conditions, and that they do not impair or degrade the functionality of the device, damage it or its immediate surroundings, or adversely affect the user.

### 5.8.1 Device Insertion and Removal

The case must hold the device securely while permitting its easy insertion and removal. The case and the enclosed device must not be damaged by the repeated insertion and removal of the device from the case under conditions representative of long-term use in a variety of environments.

### 5.8.2 Colorfastness

Any dyes, inks, or coatings in or on the case must not bleed color onto either the device or its user, particularly while the case is in contact with common substances, such as water or sunscreen.

## 5.9 Environmental

Accessories must comply with applicable environmental regulations in the regions in which such accessories are to be sold, and any applicable substance or material restrictions, including applicable restrictions on the following substances:

- Organic tin compounds, PFOS, PFOA, phthalates, azo dyes, polybrominated biphenyls (PBBs) and PAHs, per requirements of the EU REACH regulation EC 1907/2006.
- Nickel leach rate on surfaces in prolonged skin contact, per requirements of the EU REACH regulation EC 1907/2006.
- Cadmium, lead, hexavalent chromium, and nickel, per requirements of EU Directive 2009/48/EC.

## 5. Cases

### 5.10 Test Procedures

- Natural rubber latex, per requirements of EU Directive EC 93/42/EEC.
- Dimethylfumarate (DMFu), per requirements of EU Regulation 412/2012.
- pH and Formaldehyde, per requirements of China GB 18401 for textiles and China GB 20400 for leather.
- Endangered species of flora and fauna in products or packaging (US Lacey Act).
- Polybrominated diphenyl ethers (PBDE).
- Compliance with California proposition 65, as applicable.

## 5.10 Test Procedures

### 5.10.1 Device Models

Case testing procedures vary depending on the device they enclose.

#### 5.10.1.1 iPhone 11 Pro Max

**Table 5-1** iPhone 11 Pro Max Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 11 Pro Max	
Taptic Engine (page 41)	iPhone 11 Pro Max	
Acoustics (page 43)	iPhone 11 Pro Max	

#### 5.10.1.2 iPhone 11 Pro

**Table 5-2** iPhone 11 Pro Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 11 Pro	
Taptic Engine (page 41)	iPhone 11 Pro	
Acoustics (page 43)	iPhone 11 Pro	

#### 5.10.1.3 iPhone 11

**Table 5-3** iPhone 11 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 11	
Taptic Engine (page 41)	iPhone 11	
Acoustics (page 43)	iPhone 11	

## 5. Cases

### 5.10 Test Procedures

#### 5.10.1.4 iPhone XS Max

**Table 5-4** iPhone XS Max Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone XS Max	
Taptic Engine (page 41)	iPhone XS Max	
Acoustics (page 43)	iPhone XS Max	

#### 5.10.1.5 iPhone XS

**Table 5-5** iPhone XS Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone XS	
Taptic Engine (page 41)	iPhone XS	
Acoustics (page 43)	iPhone XS	

#### 5.10.1.6 iPhone XR

**Table 5-6** iPhone XR Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone XR	
Taptic Engine (page 41)	iPhone XR	
Acoustics (page 43)	iPhone XR	

#### 5.10.1.7 iPhone X

**Table 5-7** iPhone X Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone X	
Taptic Engine (page 41)	iPhone X	
Acoustics (page 43)	iPhone X	

#### 5.10.1.8 iPhone 8 Plus/iPhone 7 Plus

**Table 5-8** iPhone 8 Plus/iPhone 7 Plus Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 8 Plus and iPhone 7 Plus	
Taptic Engine (page 41)	iPhone 8 Plus and iPhone 7 Plus	
Home Button / Touch ID Sensor Overlays (page 42)	iPhone 8 Plus and iPhone 7 Plus	

## 5. Cases

### 5.10 Test Procedures

Test	Using	Notes
Acoustics (page 43)	iPhone 8 Plus and iPhone 7 Plus	

It is not possible for a case to claim compatibility with only the iPhone 8 Plus or only the iPhone 7 Plus.

### 5.10.1.9 iPhone 8/iPhone 7

**Table 5-9** iPhone 8/iPhone 7 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 8 and iPhone 7	
Taptic Engine (page 41)	iPhone 8 and iPhone 7	
Home Button / Touch ID Sensor Overlays (page 42)	iPhone 8 and iPhone 7	
Acoustics (page 43)	iPhone 8 and iPhone 7	

It is not possible for a case to claim compatibility with only the iPhone 8 or only the iPhone 7.

### 5.10.1.10 iPhone 6s Plus/iPhone 6 Plus

**Table 5-10** iPhone 6s Plus/iPhone 6 Plus Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 6s Plus and iPhone 6 Plus	
Taptic Engine (page 41)	iPhone 6s Plus	

It is not possible for a case to claim compatibility with only the iPhone 6s Plus or only the iPhone 6 Plus.

### 5.10.1.11 iPhone 6s/iPhone 6

**Table 5-11** iPhone 6s/iPhone 6 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 6s and iPhone 6	
Taptic Engine (page 41)	iPhone 6s	

It is not possible for a case to claim compatibility with only the iPhone 6s or only the iPhone 6.

### 5.10.1.12 iPhone 5/iPhone 5s/iPhone SE

**Table 5-12** iPhone 5/iPhone 5s/iPhone SE Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone SE	

## 5. Cases

### 5.10 Test Procedures

---

It is not possible for a case to claim compatibility with only the iPhone 5 or only the iPhone 5s or only the iPhone SE.

#### 5.10.1.13 iPhone 5c

**Table 5-13** iPhone 5c Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPhone 5c	

#### 5.10.1.14 iPad (7th generation)

**Table 5-14** iPad (7th generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad (7th generation)	

#### 5.10.1.15 iPad Air (3rd generation)

**Table 5-15** iPad Air (3rd generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Air (3rd generation)	

#### 5.10.1.16 iPad mini (5th generation)

**Table 5-16** iPad mini (5th generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad mini (5th generation)	

#### 5.10.1.17 iPad Pro (12.9-inch) 3rd Generation

**Table 5-17** iPad Pro (12.9-inch) 3rd Generation Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (12.9-inch) 3rd Generation	

#### 5.10.1.18 iPad Pro (11-inch)

**Table 5-18** iPad Pro (11-inch) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (11-inch)	

## 5. Cases

### 5.10 Test Procedures

---

#### 5.10.1.19 iPad Pro (10.5-inch)

**Table 5-19** iPad Pro (10.5-inch) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (10.5-inch)	

#### 5.10.1.20 iPad Pro (12.9-inch) 2nd Generation

**Table 5-20** iPad Pro (12.9-inch) 2nd Generation Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (12.9-inch) 2nd Generation	

#### 5.10.1.21 iPad (5th and 6th generation)

**Table 5-21** iPad (5th and 6th generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad (5th generation) or iPad (6th generation)	

#### 5.10.1.22 iPad Pro (9.7-inch)

**Table 5-22** iPad Pro (9.7-inch) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (9.7-inch)	

#### 5.10.1.23 iPad Pro (12.9-inch) 1st Generation

**Table 5-23** iPad Pro (12.9-inch) 1st Generation Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Pro (12.9-inch) 1st Generation	

#### 5.10.1.24 iPad mini 4

**Table 5-24** iPad mini 4 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad mini 4	

## 5. Cases

### 5.10 Test Procedures

#### 5.10.1.25 iPad mini/iPad mini 2/iPad mini 3

**Table 5-25** iPad mini/iPad mini 2/iPad mini 3 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad mini 3	

It is not possible for a case to claim compatibility with only the iPad mini or only the iPad mini 2 or only the iPad mini 3.

#### 5.10.1.26 iPad Air 2

**Table 5-26** iPad Air 2 Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Air 2	

#### 5.10.1.27 iPad Air

**Table 5-27** iPad Air Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad Air	

#### 5.10.1.28 iPad (4th generation)

**Table 5-28** iPad (4th generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPad (4th generation)	

#### 5.10.1.29 iPod touch (5th generation)/iPod touch (6th generation)/iPod touch (7th generation)

**Table 5-29** iPod touch (5th generation)/iPod touch (6th generation)/iPod touch (7th generation) Case Testing Matrix

Test	Using	Notes
Product Design (page 39)	iPod touch (7th generation)	

It is not possible for a case to claim compatibility with only the iPod touch (5th generation), iPod touch (6th generation) or the iPod touch (7th generation).

## 5.10.2 Product Design

### 5.10.2.1 Equipment


- Device.
- Apple Lightning Digital AV Adapter
- Vernier calipers
- 0.85 mm plastic feeler gauge
- EarPods with 3.5 mm Headphone Plug
- Touchscreen test block (provided by Apple)

### 5.10.2.2 Procedure

1. Insert the device into the case.
2. Verify that the device completely fits inside the case.
3. Verify the device is not loose.
4. Verify that all buttons are accessible.
5. Inspect for button feel. Verify that all buttons are not too hard to press or take a lot of effort to press.
6. If the device has an Apple Lightning connector:
  - a. Insert the Apple Lightning Digital AV Adapter into the Lightning receptacle and verify that it fits.
  - b. Using vernier calipers, measure the Lightning connector opening on the case. Verify that the opening is measured to be at least 12.05 mm by 6.30 mm.
7. If the device has a 3.5 mm headset jack:
  - a. Insert EarPods with 3.5 mm Headphone Plug into the headset jack of the device and verify it fits.
  - b. Using vernier calipers, measure the headset jack opening on the case. Verify that the opening is measured to be at least 6 mm in diameter and no more than 14 mm deep.
8. If the device has a Touch ID sensor, use vernier calipers to verify that the case is at least 2 mm away from the Touch ID sensor.


9. Verify that the case is always proud of the feeler gauge when the gauge is placed at each corner of the device. See [Figure 5-10](#) (page 40).

**Figure 5-10** Device proudness test

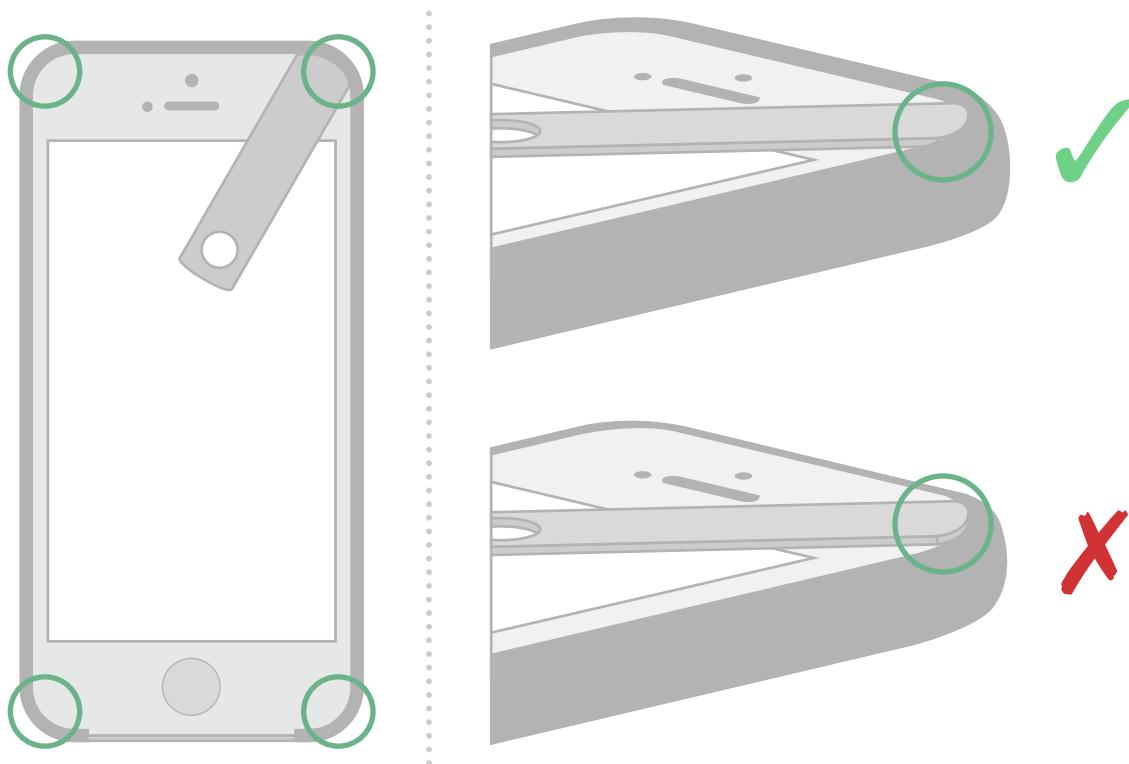


10. Set the device flat on its face (screen facing down).
11. Roll the device towards any side that is not enclosed by the case until the gap between the device's exposed glass and flat surface is smallest.
12. Verify that the feeler gauge fits into the gap between the device's exposed glass and flat surface.

**Figure 5-11** Device gap test

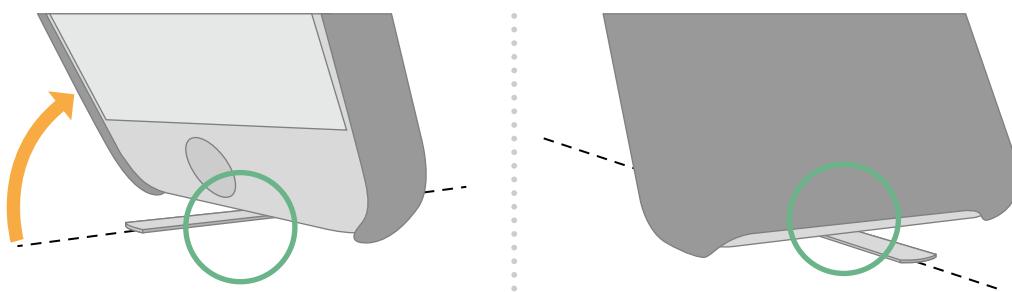

13. Place the touchscreen test block onto the touchscreen of the device. Verify the test block is sitting flush on the touchscreen.

**Figure 5-12** Device touchscreen keep-out test

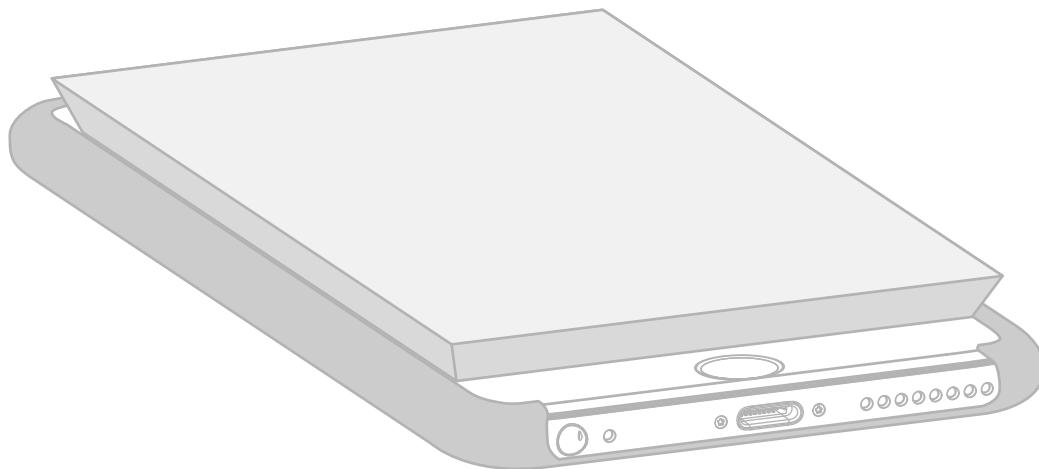

14. If the case has an overlay, verify that there are no air gaps introduced between it and the touchscreen.

### 5.10.3 Taptic Engine

#### 5.10.3.1 Equipment

- Two devices A and B, same model
- Table

#### 5.10.3.2 Procedure

1. Attach the case to device B.
2. Place device A on top of the table.
3. Place device B on top of the table next to device A.
4. Compare the Taptic Engine feedback between device A and device B for each of the following tasks:
  - a. Go to: *Settings > Sound & Haptics*, set *Vibrate on Silent* to the on position.
  - b. Toggle the Ring/Silent switch.
  - c. Connect a charger to both devices.
  - d. Go to: *Settings > Notifications > Phone > Sounds*, select *Reflection (Default)*.
  - e. Go to: *Settings > Notifications > Messages > Sounds*, select *Note (Default)*.
  - f. Go to the Home screen.
  - g. Trigger a Quick Actions menu by applying pressure to the Settings app. Continue applying pressure.

## 5. Cases

### 5.10 Test Procedures

---

- h. Slide your finger across the Quick Actions menu and release when Wi-Fi is selected.
  - i. Go to the Home screen.
  - j. Apply pressure to the Home app.
  - k. Go to: Clock app and select *Timer* on the bottom right.
  - l. Scroll through the hours and minutes.
5. If the device has a Home button:
    - a. Go to: *Settings > General > Home Button*, tap option 2.
    - b. Press the Home button.
  6. Repeat the above tasks while holding device A in the left hand and device B in the right hand.

#### 5.10.3.3 Pass/Fail Criteria

The case does not cause substantial change in the feel of the device's Taptic Engine.

### 5.10.4 Home Button / Touch ID Sensor Overlays

This test procedure is applicable to all iPhone 8 Plus, iPhone 8, iPhone 7 Plus or iPhone 7 accessories that overlay the Home button or the Touch ID sensor.

#### 5.10.4.1 Equipment

- Nitrile gloves (e.g. Ansell TNT Blue)
- Ethyl alcohol hand sanitizer (e.g. Purell)
- Scissors

#### 5.10.4.2 Procedure

1. Cut off a square of material from the nitrile glove's wrist portion.
2. Install the accessory onto the device.
3. Press the sleep/wake or side button to place the device into a sleep state (display off).
4. Place the square of nitrile glove material over the device's Home button / Touch ID sensor with the glove's outer side facing away from the device.
5. Apply a small amount of hand sanitizer (approximately dime-sized) to the nitrile over the Home button / Touch ID sensor.
6. Repeat the following steps 10 times:
  - a. Press the Home button / Touch ID sensor with a thumb.
  - b. Verify that the device wakes (display on).
  - c. Press the sleep/wake or side button to place the device into a sleep state (display off).
7. Repeat the following steps 10 times:
  - a. Press the Home button / Touch ID sensor with an index finger.
  - b. Verify that the device wakes (display on).

## 5. Cases

### 5.10 Test Procedures

---

- c. Press the sleep/wake or side button to place the device into a sleep state (display off).

#### 5.10.4.3 Pass/Fail Criteria

Verify the device wakes every time the Home button / Touch ID sensor is pressed.

### 5.10.5 Acoustics

The following test procedures apply to devices with a built in speaker and/or microphone.

#### 5.10.5.1 Speakerphone Call

This procedure evaluates the impact of a case on the speakerphone performance of a device.

##### 5.10.5.1.1 Equipment and Test Setup

This procedure requires two operators in separate quiet rooms.

Room A:

- Operator A
- The device (with cellular service) used to evaluate the case
  - The device should have at least two out of five bars of cellular reception within the room.

Room B:

- Operator B
- Landline speakerphone
- Digital audio recorder (e.g., a device with the Voice Memo app)

##### 5.10.5.1.2 Pass/Fail Criteria

There are two categories of failure for this procedure:

- Echo: If Operator B hears their own voice from the landline.
- Double Talk: If Operator B hears Operator A inconsistently.

The pass/fail threshold for these two categories should be established by performing the test procedure using:

- The device (without the case) as a reference.

There should be no perceivable difference between the reference and the test conducted with the case on the device.

### 5.10.5.1.3 Procedure

1. Operator A: Use the device (without a case) in Room A to call the landline phone in Room B.
2. Operator A: Place the device in speakerphone mode.
3. Operator B: Answer the call with the landline phone in Room B.
4. Operator B: Place the landline phone in speakerphone mode.
5. Operator A and B: Simultaneously recite the following phrases to evaluate the call quality:
  - a. The birch canoe slid on the smooth planks.
  - b. Glue the sheet to the dark blue background.
  - c. It's easy to tell the depth of a well.
  - d. These days a chicken leg is a rare dish.
  - e. Rice is often served in round bowls.
  - f. The juice of lemons makes fine punch.
  - g. The box was thrown beside the parked truck.
  - h. The hogs were fed chopped corn and garbage.
  - i. Four hours of steady work faced us.
  - j. Large size in stockings is hard to sell.
6. Operator B: Evaluate the call. Ensure that the call is clear when there is no case on the device.
7. Operator A: Place the case on the device.
8. Operator B: Start audio recording using a digital audio recorder.
9. Operator A: State the test date and identify the manufacturer name, product name, and a unique identifier (UID) for case (production run name, design version, etc.).
10. Operator A and B: Simultaneously recite the same phrases as above.
11. Operator B: Stop audio recording.
12. Operator B: Evaluate the recording against the pass/fail criteria, see [Pass/Fail Criteria](#) (page 43).

---

**Note:** The phrases used for this test procedure are from "IEEE Recommended Practice for Speech Quality Measurements," in *IEEE Transactions on Audio and Electroacoustics*, vol. 17, no. 3, pp. 225-246, September 1969.

---

# 6. Covers

This chapter is applicable to accessories that cover device displays.

## 6.1 Magnetic Interference

Accessory covers must not interfere with the device's:

- Magnetic compass.
- Rear camera autofocus.
- Rear camera optical image stabilization (OIS), if present.

See [Magnetic Interference](#) (page 17) for additional details.

## 6.2 Smart Covers

Dimensional drawings indicating magnet and Hall effect sensor locations are available for the following devices:

- [iPad \(7th generation\) 2 of 3](#) (page 148)
- [iPad Air \(3rd generation\) with Wi-Fi 2 of 3](#) (page 151)
- [iPad Air \(3rd generation\) with Wi-Fi + Cellular 2 of 3](#) (page 154)
- [iPad mini \(5th generation\) with Wi-Fi 2 of 3](#) (page 157)
- [iPad mini \(5th generation\) with Wi-Fi + Cellular 2 of 3](#) (page 160)
- [iPad Pro \(12.9-inch\) 3rd Generation 2 of 3](#) (page 163)
- [iPad Pro \(11-inch\) 2 of 3](#) (page 166)
- [iPad Pro \(12.9-inch\) 2nd Generation Magnet/Hall Effect Sensors 1 of 2](#) (page 170)
- [iPad Pro \(12.9-inch\) 2nd Generation Magnet/Hall Effect Sensors 2 of 2](#) (page 171)
- [iPad Pro \(10.5-inch\) Magnet/Hall Effect Sensors 1 of 2](#) (page 174)
- [iPad Pro \(10.5-inch\) Magnet/Hall Effect Sensors 2 of 2](#) (page 175)
- [iPad \(5th and 6th generation\) Magnet/Hall Effect Sensors 1 of 2](#) (page 177)
- [iPad \(5th and 6th generation\) Magnet/Hall Effect Sensors 2 of 2](#) (page 178)
- [iPad Pro \(9.7-inch\) Magnet/Hall Effect Sensors 1 of 2](#) (page 181)
- [iPad Pro \(9.7-inch\) Magnet/Hall Effect Sensors 2 of 2](#) (page 182)
- [iPad Pro \(12.9-inch\) 1st Generation Magnet/Hall Effect Sensors 1 of 2](#) (page 185)

## **6. Covers**

### **6.2 Smart Covers**

---

- [iPad Pro \(12.9-inch\) 1st Generation Magnet/Hall Effect Sensors 2 of 2 \(page 186\)](#)
- [iPad mini 4 Magnet/Hall Effect Sensors \(page 189\)](#)

# 7. Screen Overlays

The touch interface in a device senses the presence of one or more fingers on its surface. Any material between the surface and the user's hand, even a very thin sheet of plastic, may affect the performance of the touch interface.

## 7.1 Product Design

The screen overlay must not degrade the performance of Multi-Touch or Apple Pencil.

The screen overlay thickness should not exceed 0.1 mm for devices supporting Apple Pencil.

The screen overlay thickness should not exceed 0.3 mm for all other devices.

Additionally, screen overlays must not:

- Introduce air gaps between the touchscreen and overlay.
- Be electrically conductive.

## 7.2 Edge Swipe and Edge Press Gestures

See [Edge Swipe Gestures](#) (page 24) and [Edge Press Gestures](#) (page 24).

# 8. Camera Attachments

This chapter is applicable to accessories that intentionally alter the images captured by device cameras.

## 8.1 Magnetic Interference

Accessory camera attachments must not interfere with the device's:

- Magnetic compass.
- Rear camera autofocus.
- Rear camera optical image stabilization (OIS), if present.

See [Magnetic Interference](#) (page 17) for additional details.

# 9. AC Power Adapters

AC power adapters convert AC "mains" power to DC for the purpose of providing power to a device. They may provide power via one or more of the following:

- [USB-C Receptacle](#) (page 122) combined with a USB-C to Lightning cable.
- [USB-A Receptacle](#) (page 119) combined with a USB-A to Lightning cable.
- [Qi Wireless Power](#) (page 20).

## 9.1 Converter Switching Frequencies

Device touchscreen or audio functionality may be degraded if converter switching frequencies do not meet the following requirements:

- Under loads greater than 5 mA, converter switching frequencies must be above 22 kHz.
- Under loads greater than 20 mA, converter switching frequencies:
  - Must be above 60 kHz.
  - Should be above 450 kHz.

## 9.2 YCAP AC Capacitor

AC power adapters should include a YCAP AC capacitor (up to 1000 pF) between the primary and secondary sections of the adapter's transformer to reduce common-mode noise at switching frequencies. These frequencies or their harmonics can interfere with device touchscreen sensors.

## 9.3 Impedance Stability


AC power adapter series impedance should not change abruptly. Sudden changes in impedance may cause touchscreen sensor output oscillations.

Bridge diodes used in full-wave bridge rectifiers can be a major source of abrupt changes in the series impedance. If the bridge diodes have large inherent reverse capacitance (greater than 100 pF), then the net impedance change due to diode switching may be acceptably small. However, diode reverse capacitance may decrease in more compact IC designs due to decreased chip area.

Impedance of bridge diodes with unacceptably low reverse capacitance can be stabilized using the example circuit shown in [Figure 9-1](#) (page 50) and [Table 9-1](#) (page 50). In this example, capacitors C1, C2, C3, and C4 have been placed in parallel with diodes D1, D2, D3, and D4 to stabilize the bridge impedance. Their values are larger than the inherent reverse capacitances of the diodes.

Resistors R1, R2, R3, and R4 are optional; if included, they can block noise at very high frequencies, which can help with EMI compatibility. The recommended values of R1, R2, R3, and R4 in [Table 9-1](#) (page 50) were chosen to have trivial levels of impedance relative to the impedances of C1, C2, C3, and C4 at power line frequencies.

**Figure 9-1** Typical AC power adapter diode bridge circuit

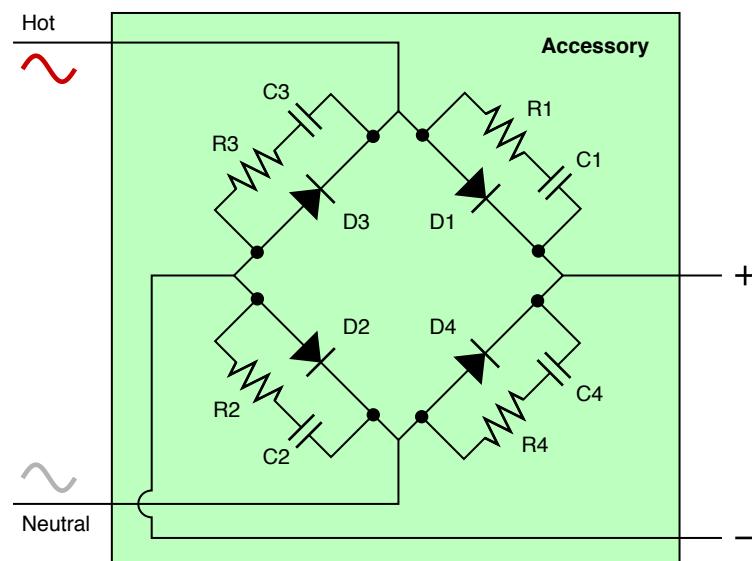

**Table 9-1** Typical component values for an AC power adapter diode bridge circuit

Component	Value
C1, C2, C3, C4	47 pF
R1, R2, R3, R4	2 kΩ

## 9.4 Fuse Protection

A fuse should be present at the input of the AC power adapter to protect it under any fault condition.

## 9.5 Short Circuit Response

The output of the AC power adapter should drop or fold back without any resulting damage if its output is shorted to the secondary common (less than 10 mΩ).

# 10. Adapters

An adapter accessory enables connections between physically incompatible devices and accessories.

## 10.1 USB-C to USB Micro-B Adapters

Bundled USB-C to USB Micro-B adapters must consist of:

- [USB-C Plug](#) (page 120).
- USB Micro-B receptacle.

All wiring must be handled in accordance with the USB specification.

A  $56\text{ k}\Omega$  pull-up with a tolerance of 5% or better must be connected to the USB CC wire.

The adapter must not consume any power from the USB Micro-B receptacle.

The adapter must not monitor or modify the USB D+/D- signals.

# 11. Battery Packs

A battery pack is an accessory that is designed to provide power to the device from an internal power supply.

The battery pack may provide power via one or more of the following:

- [USB-C Receptacle](#) (page 122) combined with a USB-C to Lightning cable.
- [USB-A Receptacle](#) (page 119) combined with a USB-A to Lightning cable.
- [Qi Wireless Power](#) (page 20).

## 12. AirPods Accessories

Apple AirPods accessories such as charging case covers must not interfere with their operation.

Relevant keep-out regions can be found in the device dimensional drawings, see:

- [AirPods Pro Wireless Charging Case](#) (page 218).
- [AirPods Wireless Charging Case](#) (page 219).
- [AirPods](#) (page 220).

# 13. Watch Bands

A well-designed band will securely attach to Apple Watch while not interfering with its operation. See [Device Dimensional Drawings](#) (page 126) for Apple Watch dimensional drawings with defined keep-out zones.

## 13.1 Requirements

Bands for Apple Watch must integrate two lugs that mate with the [Figure 13-1](#) (page 57). Apple Watch uses a high precision interface profile, see <https://developer.apple.com/watch/bands/> for a sample 2D lug profile. Lugs should lock into the band mating slot with a 'lug latch' feature that prevents accidental removal of the band.

Exposed edges of bands and lugs must pass UL 1439 tests for sharpness of edges on equipment and BS EN 71-1:2014, *Safety of Toys - Mechanical and physical properties*.

The lug latch must never become jammed in the extended position.

Bands must not integrate magnetic chargers.

Bands and lugs should:

- Pass a 72 hour salt mist test as specified in ASTM B117 with no visible corrosion.
- Resist a 5-20 kgf lateral slide-out force when installed in Apple Watch.
- Resist a 20 kgf or greater pull force as specified in ISO-6245:1996, *Specifications for Diver's Watches*, section 7.3.
- Detach easily from Apple Watch when the band release buttons are pressed.
- Take into account the weight of Apple Watch.

Bands must not prevent the user's skin from maintaining direct contact with the Apple Watch heart sensors and back of Apple Watch, and must incorporate sufficient margin to compensate for shifting or dimensional changes of the band material. Failure to do so may interfere with Apple Watch wrist detect and Apple Pay features. Bands should:

- Have length sizing adjustment pitch of less than 7 mm (center to center).
- Provide sufficient adjustability for the user to achieve a snug, yet comfortable, fit that prevents movement of Apple Watch relative to skin.

## **13. Watch Bands**

### **13.1 Requirements**

---

Bands intended for use during exercise should maintain a snug fit through a full range of motion to maintain compatibility with Apple Watch heart sensors.

Apple recommends the following materials for lug bodies:

- 75 Shore A silicone.
- 50-55% glass-filled nylon.
- 240-270HV 316L / EN 1.4435 stainless steel.

Apple recommends the following materials for lug latches:

- 50-55% glass-filled nylon.
- 240-270HV 316L / EN 1.4435 stainless steel.


Bands for Apple Watch must comply with applicable environmental regulations in the regions in which such bands are to be sold, and any applicable substance or material restrictions, including applicable restrictions on the following substances:

- Organic tin compounds, PFOS, PFOA, phthalates, azo dyes, polybrominated biphenyls (PBBs) and PAHs, per requirements of the EU REACH regulation EC 1907/2006.
- Nickel leach rate on surfaces in prolonged skin contact, per requirements of the EU REACH regulation EC 1907/2006.
- Cadmium, lead, hexavalent chromium, and nickel, per requirements of EU Directive 2009/48/EC.
- Natural rubber latex, per requirements of EU Directive EC 93/42/EEC.
- Dimethylfumarate (DMFu), per requirements of EU Regulation 412/2012.
- pH and Formaldehyde, per requirements of China GB 18401 for textiles and China GB 20400 for leather.
- Endangered species of flora and fauna in products or packaging (US Lacey Act).
- Polybrominated diphenyl ethers (PBDE).

## 13. Watch Bands

### 13.1 Requirements

**Figure13-1** Apple Watch Band Interface

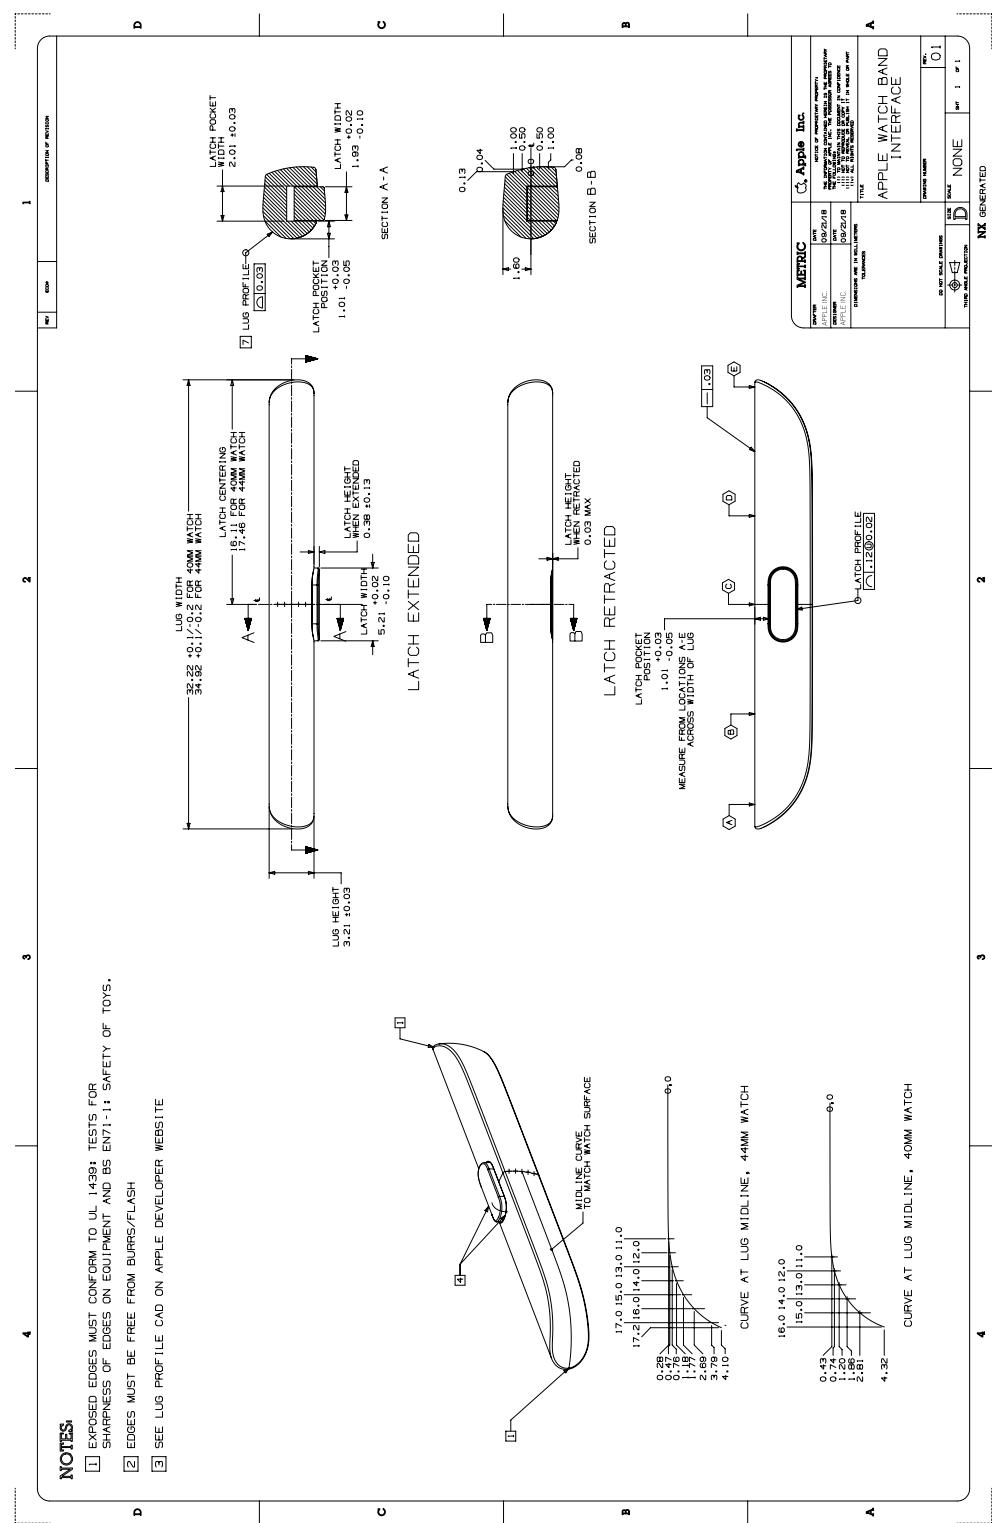

## 13.2 Example Apple Watch Lug Assembly

These assembly instructions are based on [Figure 13-3](#) (page 60) and an assembly fixture with a clamping mechanism.

Proper assembly of the lug is critical to ensure the band securely attaches to the Apple Watch. Improper assembly may result in damage to the Apple Watch and/or the band.

Screw threads should be secured with Loctite 435. Screws that have been previously installed/used should not be reused.

The assembly fixture should hold the lug assembly in place and a clamping mechanism should compress the lug during screw insertion.


Assemble the band and lug as follows, see [Figure 13-2](#) (page 59).

1. Lightly insert the long end of the female pin in the band until hard stop. Ensure there is no warping or damage in the band.
2. Lightly insert the long end of the male pin in the other side of the band until it interlocks with the female pin and both pins are seated together. Ensure there is no warping or damage in the band.
3. Align the holes on the bottom of the lug with the exposed ends of the female and male pins. Note lug latch top/bottom orientation relative to band. Latch must be on the side of the band against the wrist.
4. Apply Loctite 435 to screw threads.
5. Install both screws using the following specification:
  - Torque: 1.1 kgf-cm  $\pm 10\%$
  - RPM: 120  $\pm 10\%$
6. Inspect for screw proudness and cross-threading visually at 1200-1400 lux.
7. Ensure screw is just sub-flush to the lowest part of the counterbore and appears parallel to the long axis of the lug.
8. Ensure screw is flat and concentric with the counterbore, without damage.

## 13. Watch Bands

### 13.2 Example Apple Watch Lug Assembly

**Figure 13-2** Apple Watch Lug Assembly Fixture

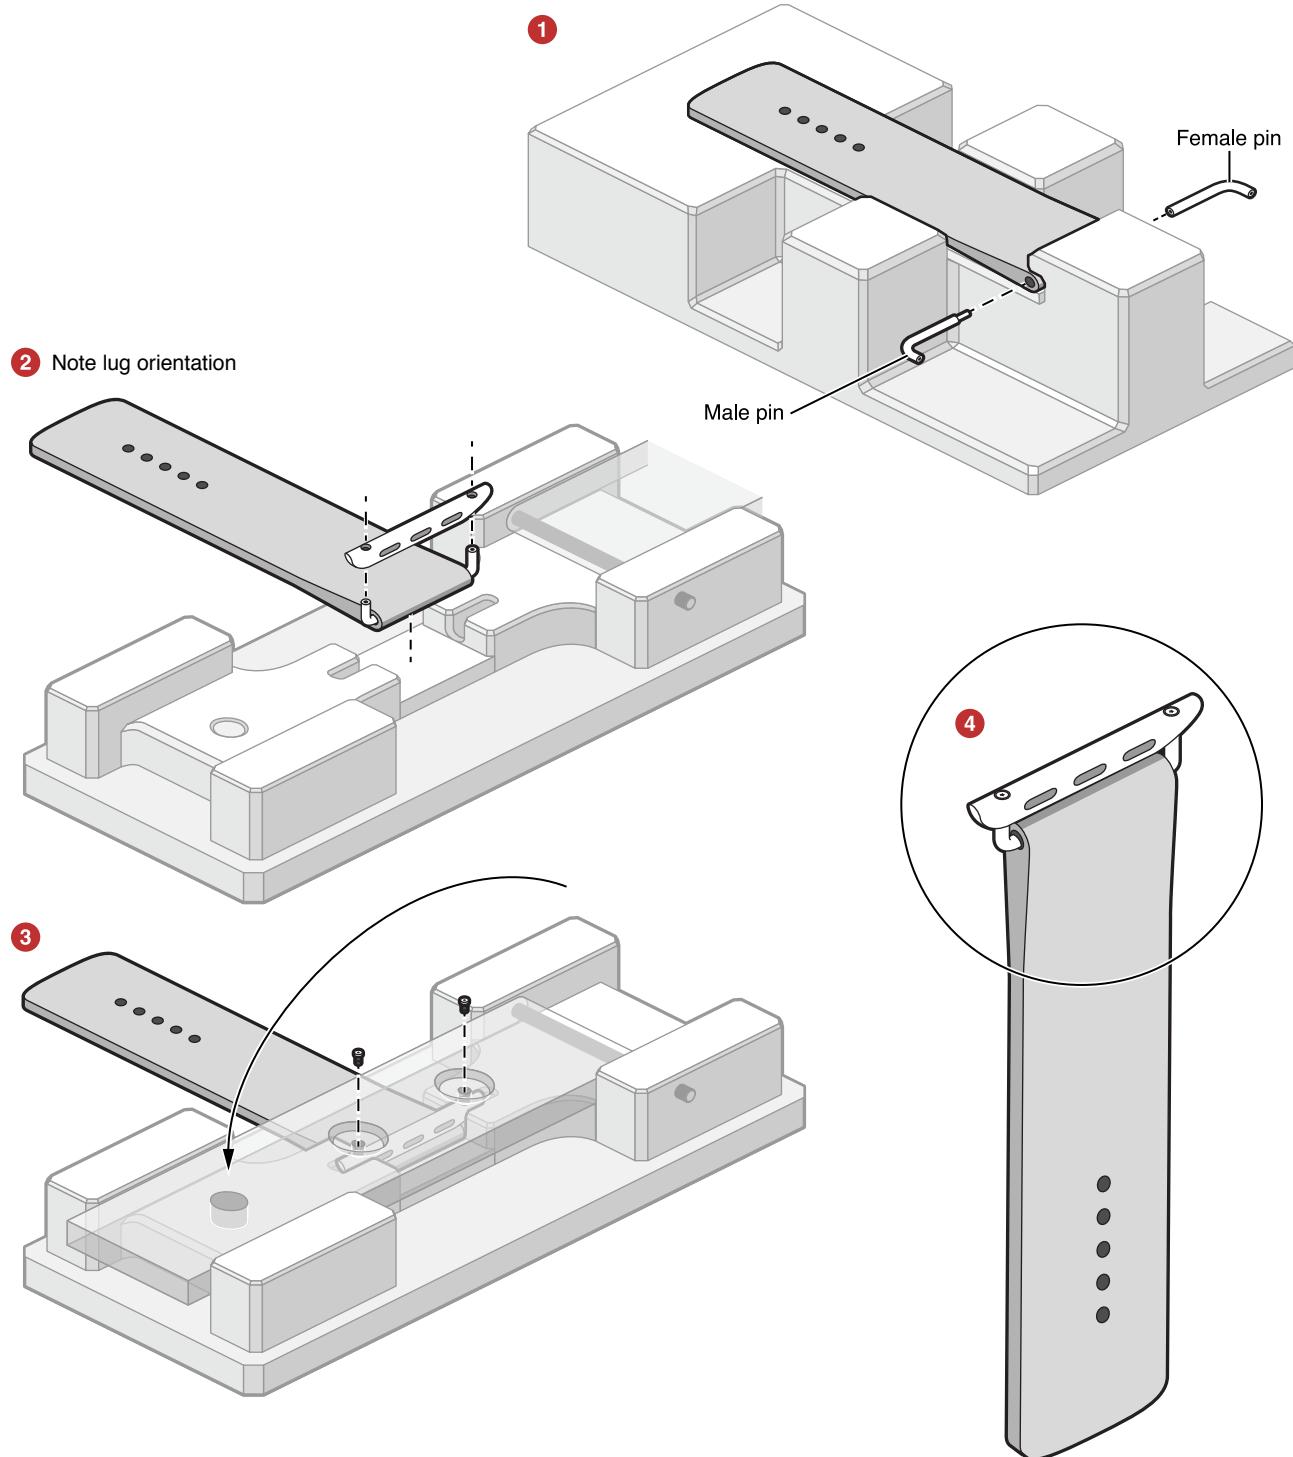


## **13. Watch Bands**

## 13.2 Example Apple Watch Lug Assembly

## Figure 13-3

## Example Apple Watch Lug

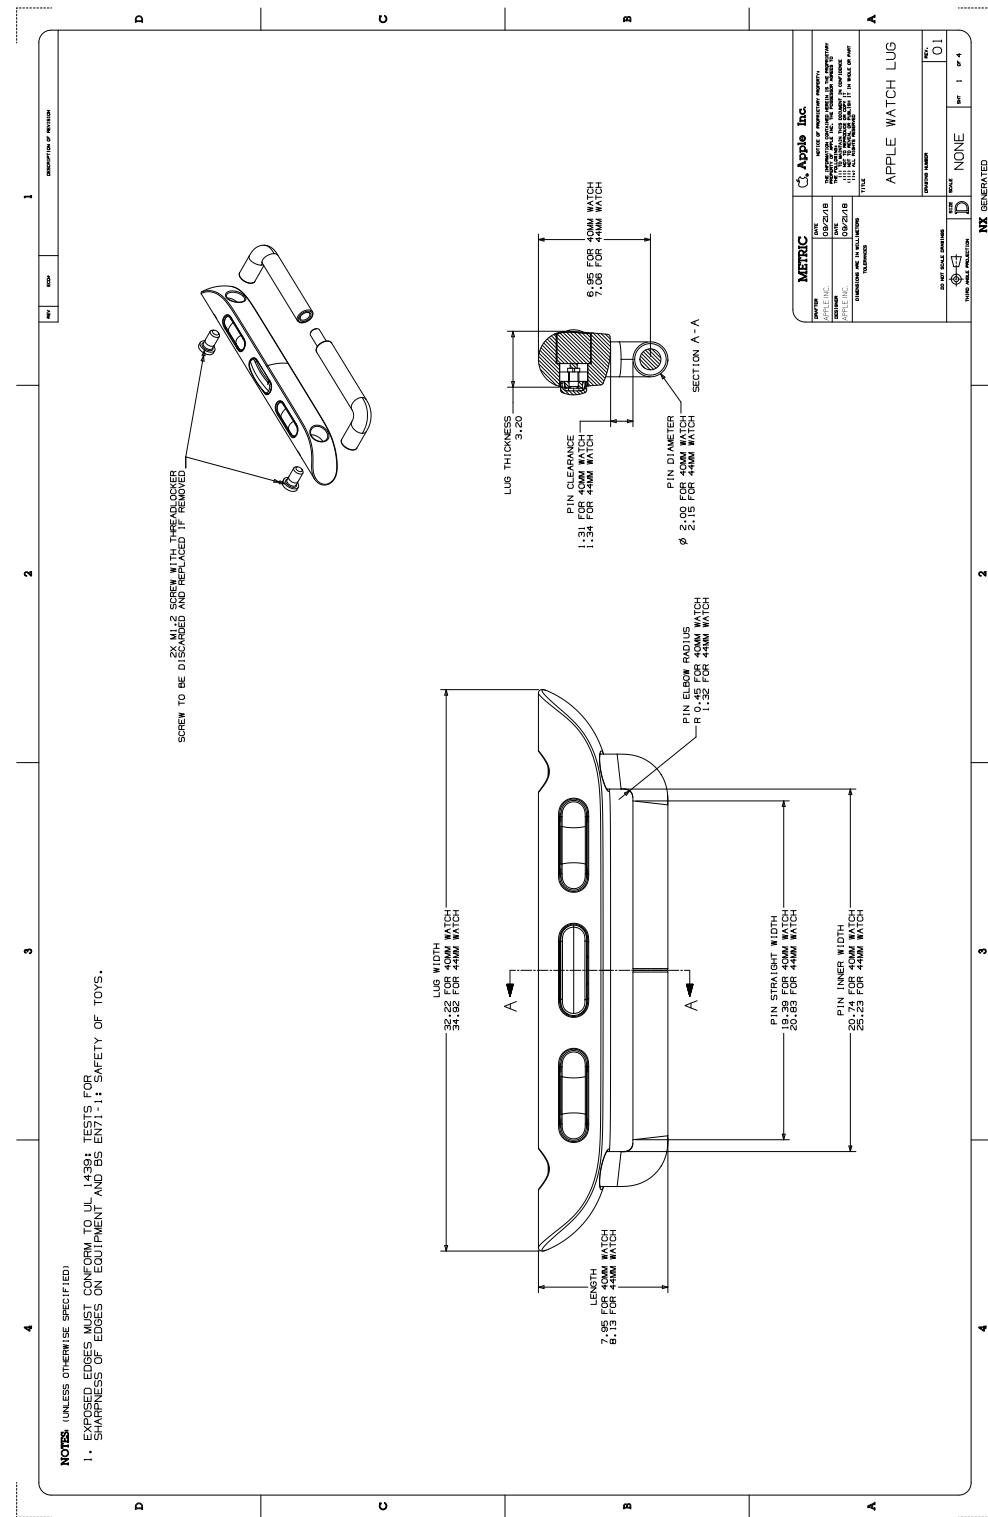

# Features

# 14. Device Power (Lightning)

The Device Power feature enables accessories to report their power characteristics and provide power to a device.

Apple strongly recommends providing power to the device whenever possible for the best user experience.

Accessories that provide power to a device must connect to the device either through an integrated Lightning connector or a USB to Lightning cable. To incorporate an integrated Lightning connector, the accessory developer must be a member of the Apple MFi licensing program. See <https://developer.apple.com/programs/mfi> for further information.

Accessories that provide power to a device must either:

- Provide direct power, see [Direct Power Source](#) (page 62).
- Manage power from external sources, see [External Power Source](#) (page 62).

All accessories that do not have the potential for data communication with the device must provide direct power to the device, see [Direct Power Source](#) (page 62).

## 14.1 Direct Power Source

Accessories that provide power directly must provide power at all times unless a direct user action is taken to put the accessory into an 'off' state. Failure to provide power at all times may result in the accessory being unable to charge a device whose battery level is too low for the device to boot.

## 14.2 External Power Source

Accessories that draw power from external power sources and provide all or a portion of that power to the device must identify the power source's capability and report accordingly to the device.

**Note:** Accessories must not manipulate a device into drawing more power from the external power source than the device would normally draw when directly connected to the external power source.

Accessories must not manipulate a device into drawing less than the minimum power required by the accessory compatibility claims if it is available from the external source, see [Providing Power via USB Connectors](#) (page 63).

---

Accessories that draw power from external power sources may inform the device that power is not available or available at a reduced level (such as from an internal battery) when the user unplugs the accessory from the external power source (such as an AC power adapter or AC "mains" power outlet). Power to the device must be restored (and the power providing capability change must be communicated to the device) when the user re-connects the external power source.

See [AC Power Adapters](#) (page 49), [Integrated USB Receptacles](#) (page 16), and [User Supplied Cables and AC Power Adapters](#) (page 16) for additional requirements specific to external USB power supplies/cables.

## 14.3 Declaring Capability

If the accessory provides power via a:

- USB-A receptacle, then it must use one of the following to declare its power providing capability:
  - [USB Power Capability Vendor Request](#) (page 86).
  - [USB D+/D- Resistor Networks](#) (page 87).
- USB-C receptacle, then:
  - It must use one of the following to declare its power providing capability:
    - [USB-C Current](#) (page 91).
    - [USB Power Delivery](#) (page 90).
  - If the accessory does not have the potential for data communication with the device, it must also support the *USB Battery Charging 1.2* specification.

## 14.4 Providing Power via USB Connectors

If the accessory connects via a USB-A receptacle, see [USB-A Receptacle](#) (page 119).

If the accessory connects via a USB-C receptacle, see [USB-C Receptacle](#) (page 122).

## 14.5 Labeling Multiple Connectors

If the accessory has multiple connectors with different device compatibilities, then the iPad-compatible connectors must be labeled with the text 'iPad' unless it is physically impossible to connect an iPad to the iPhone/iPod compatible connectors.


## 14.6 Fast Charge for iPhone (18 W)

Power-providing accessories may advertise Fast Charge for iPhone (<https://support.apple.com/en-us/HT208137>) if they:

- Support [USB Power Delivery](#) (page 90).
- Supply 18 W (2 A at 9.0 V) using USB-PD.
- Claim compatibility with at least one of the following iPhone models:
  - iPhone 11 Pro Max
  - iPhone 11 Pro
  - iPhone 11
  - iPhone XS Max
  - iPhone XS
  - iPhone XR
  - iPhone X
  - iPhone 8 Plus
  - iPhone 8

## 14.7 Overcurrent and Short Circuit Protection

**Figure 14-1** Overcurrent and Short Circuit Protection

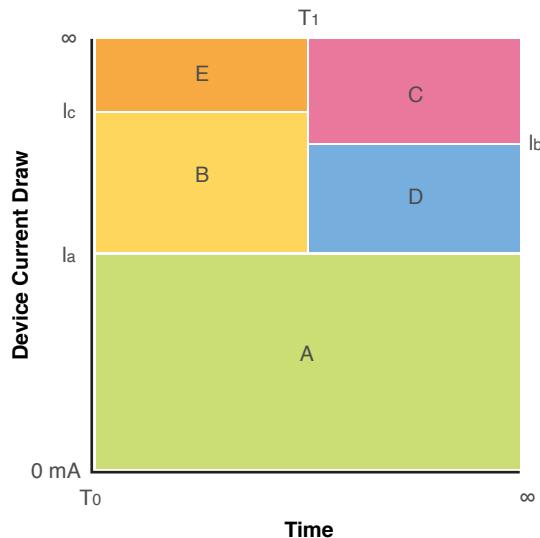

Power-providing accessories must implement overcurrent and short circuit protection for each region in [Figure 14-1](#) (page 65) as follows:

**Table 14-1** Overcurrent/Short Circuit Protection Current Thresholds

Threshold	Definition
$I_a$	Nominal accessory output current (i.e. 1000 mA, 2100 mA, 2400 mA, 3000 mA).
$I_b$	$I_a + 60\%$ .
$I_c$	Lowest device current draw that will cause accessory output voltage (measured at Lightning Device Power) to drop below 2 V.

**Table 14-2** Overcurrent/Short Circuit Protection Time Thresholds

Threshold	Definition
$T_0$	Start of any device current draw transient.
$T_1$	Accessory overcurrent/short circuit deglitch/debounce time, must $\geq T_0 + 1$ ms.

**Table 14-3** Overcurrent/Short Circuit Protection Behaviors

Region	Name	Accessory Behavior
A	Normal Operation	Accessory must not limit or shutdown output current.
B	Overcurrent Transient	Accessory must not shutdown output current. Accessory may limit output current to $I_a$ or higher.

## 14. Device Power (Lightning)

### 14.8 Overcurrent and Short Circuit Protection Resets

Region	Name	Accessory Behavior
C	Overcurrent	Accessory must shutdown output current.
D	Potential Overcurrent	Accessory may shutdown output current.
E	Potential Short Circuit	If Lightning Device Power voltage drops below 2 V, the accessory may trigger short circuit protection. Accessories must not trigger short circuit protection on device current draw.

## 14.8 Overcurrent and Short Circuit Protection Resets

Accessory overcurrent and short circuit protection must reset without mechanical intervention.

## 14.9 Power State Changes

Accessories must not change the amount of power provided to a device unless the accessory power state changes in one of the following ways:

- Direct user action is taken to turn the accessory on or off.
- An external power source (such as mains electricity or battery) is connected to or disconnected from the accessory.
- The accessory's internal power source (such as a battery) is depleted or loaded to the point where it is no longer capable of supplying its declared power providing capability or is now capable of supplying more power than previously declared.

# 15. Bluetooth Accessory Identification

This chapter describes Apple-specific Bluetooth commands that extend accessory capabilities beyond those supported by standard Bluetooth profiles.

To enable Apple-specific features, the accessory must support [HFP Command AT+XAPL](#) (page 67), which provides accurate information about the accessory's supported features. The device will use the information sent by this command to enable and disable custom commands.

The accessory must send the following AT+XAPL command after making a successful HFP Service Level Connection (SLC) to the device. The accessory should send an AT+XAPL command first, before sending any additional Apple-specific commands. See [Siri](#) (page 70) and [Bluetooth Headset Battery Level Indication](#) (page 69).

## 15.1 HFP Command AT+XAPL

**Description:** Enables custom AT commands from an accessory.

**Initiator:** Bluetooth accessory

**Format:** AT+XAPL=*vendorID-productID-version,features*

**Parameters:**

- *vendorID*: A string representation of the hex value of the vendor ID from the manufacturer, without the 0x prefix.
- *productID*: A string representation of the hex value of the product ID from the manufacturer, without the 0x prefix.
- *version*: The revision of the software.
- *features*: A base-10 representation of a bit field. Available features are:
  - Bit 0 = reserved
  - Bit 1 = The accessory supports battery reporting (reserved only for battery operated accessories).
  - Bit 2 = The accessory is docked or powered (reserved only for battery operated accessories).
  - Bit 3 = The accessory supports Siri status reporting.
  - Bit 4 = the accessory supports noise reduction (NR) status reporting.
  - All other values are reserved.

**Example:** AT+XAPL=ABCD-1234-0100,10 (Supports battery reporting and Siri status)

## 15. Bluetooth Accessory Identification

### 15.1 HFP Command AT+XAPL

---

**Response:** +XAPL=iPhone,*features*

# 16. Bluetooth Headset Battery Level Indication

Any Hands-Free Bluetooth headset accessory can show its battery level to the user as an indicator icon in the device status bar. This feature is supported on all devices that support the Hands-Free Profile, including iPhone, iPod touch, and iPad.

Headset battery indication is implemented by two Apple-specific Bluetooth HFP AT commands, [HFP Command AT+XAPL](#) (page 67) and [HFP Command AT+IPHONEACCEV](#) (page 69)

## 16.1 HFP Command AT+IPHONEACCEV

**Description:** Reports a headset state change.

**Initiator:** Headset accessory

**Format:** `AT+IPHONEACCEV=Number of key/value pairs, key1, val1, key2, val2, ...`

### Parameters:

- *Number of key/value pairs*: The number of parameters coming next.
- *key*: the type of change being reported:
  - 1 = Battery Level
  - 2 = Dock State
- *val*: the value of the change:
  - Battery Level: string value between '0' and '9'
  - Dock State: 0 = undocked, 1 = docked

**Example:** `AT+IPHONEACCEV=1,1,3`

# 17. Siri

Siri enables a user to have rich interactions with a device by primarily using their voice.

Accessories supporting Siri must not use an icon that resembles the Siri microphone icon.

The rest of this chapter is applicable to accessories that support Siri over Bluetooth using HFP commands.

To support Siri using other transports and protocols, the accessory developer must be a member of the Apple MFi licensing program. See <https://developer.apple.com/programs/mfi> for further information.

## 17.1 Enabling Custom Siri Commands

Every accessory that supports Siri over Bluetooth using HFP commands must support [HFP Command AT+XAPL](#) (page 67). The device will use the information sent by this command to enable and disable custom commands related to Siri.

To receive Siri status events, the accessory must send the AT+XAPL command after making a successful HFP Service Level Connection (SLC) to the device. The accessory should send an AT+XAPL command first, before sending any of the additional Siri-specific commands described below.

## 17.2 Obtaining Siri Availability Information

After establishing an HFP profile connection, an accessory can determine if Siri is available and enabled on a device. It can also receive notifications of changes in Siri status. If Siri is disabled, Voice Control will be activated instead.

### 17.2.1 Obtaining Status Information at Connection

The accessory should send the following command after making a successful HFP profile (SLC) connection and sending an AT+XAPL command.

#### 17.2.1.1 HFP Command AT+APLSIRI?

**Description:** AT command to retrieve Siri status information.

**Initiator:** accessory

**Format:** AT+APLSIRI?

**Response:** +APLSIRI : *value*

**Defined Values:**

- 0 = Siri is not available on this platform.
- 1 = Siri is available and enabled.
- 2 = Siri is available but not enabled.

**Example:** +APLSIRI : 1 (Siri is available and enabled)

## 17.2.2 Receiving Siri Availability Updates from the Device

After initialization has been completed, the device will send the accessory the following notification if there is a change in Siri status. This notification will be provided only if the accessory has requested Siri status (by sending AT+APLSIRI?) at least once after connection, and if the device has reported that Siri is available and enabled.

### 17.2.2.1 HFP Command +APLSIRI

**Description:** Unsolicited event indicating a change in Siri status.

**Initiator:** Device

**Format:** +APLSIRI : *value*

**Defined Values:**


- 1 = Siri is available and enabled.
- 2 = Siri is available but not enabled.

**Example:** +APLSIRI : 2 (Siri is available but not enabled)

## 17. Siri

### 17.3 Initiating a Siri Session

**Figure 17-1** Siri is Disabled/Enabled from the Device's Settings

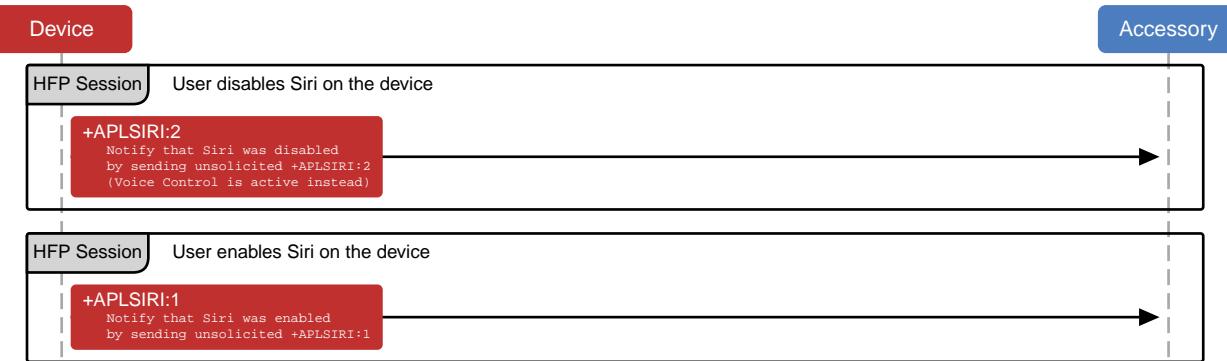

## 17.3 Initiating a Siri Session

Once support for Siri is established on both the accessory and the device, a Siri session can be started from either one.

### 17.3.1 Initiating a Session from the Accessory

The accessory should only initiate a Siri session as a result of a direct user action.

The accessory must use the voice recognition command AT+BVRA defined in the Bluetooth *Hands-Free Profile* specification (*Hands-Free Profile* 1.6 profile specification, section 4.25) to initiate a Siri session.

The HFP profile must be connected and SLC must exist.

The accessory should use the following command sequence:

- The accessory sends an AT+BVRA=1 command to the device.
- The device sends an OK response.
- The device launches a Siri session and creates a Synchronous Connection (SCO) for the audio.
- If the Siri session is not finished, the accessory must send AT+BVRA=1 to continue the conversation. This may need to happen multiple times.
- When the Siri session is finished, the device sends a +BVRA:0 result code to the accessory.
- The device disconnects the SCO connection.

While a Siri session is active, the accessory must let the user continue the conversation and ask follow up questions within the current context. In order to do so, the accessory must be able to send an AT+BVRA=1 command to the device even after Siri has been already activated and before +BVRA:0 is received. [Figure 17-2](#) (page 73) shows an overview of the interaction when Siri is triggered from the accessory, the running session was continued twice and once Siri was finished, the device dismissed the session.

**Figure 17-2** Initiating a Siri Session from the Accessory




### 17.3.2 Initiating a Session from the Device

If the accessory supports voice recognition commands, the device sends a +BVRA event to indicate the start of a Siri session. The accessory must enable support for voice recognition and indicate it in its feature response as described in the Bluetooth *Hands-Free Profile* 1.6 specification, section 4.34.1, "Bluetooth Defined AT Capabilities." Specifically, the HFP profile must be connected, SLC must exist, and voice recognition activation (bit 3) must be enabled in the AT+BRSF command. The device will not use virtual call functionality for the Siri session if voice recognition activation is supported by the accessory.

The accessory should expect the following command sequence:

- The device sends a +BVRA:1 event to the accessory.
- The device launches a Siri session and creates a SCO connection for the audio.
- When the Siri session is finished, the device sends a +BVRA:0 result code to the accessory.
- The device disconnects the SCO connection.


**Figure 17-3** Initiating a Siri Session from the Device

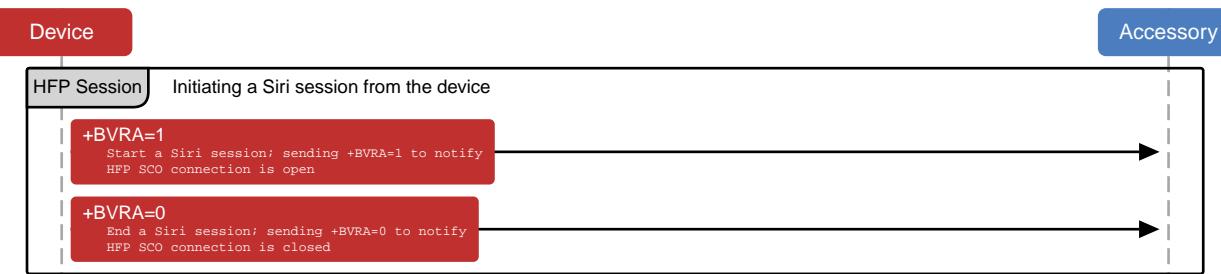

### 17.3.3 Ending a Session from the Accessory

Once a Siri session is running the accessory must be capable of ending the session by sending an AT+BVRA=0 command to the device. [Figure 17-4](#) (page 74) shows an example of ending a running Siri session from the accessory. The accessory should only end an active session as a result of a direct user action.

**Figure 17-4** Ending a Siri Session from the Accessory

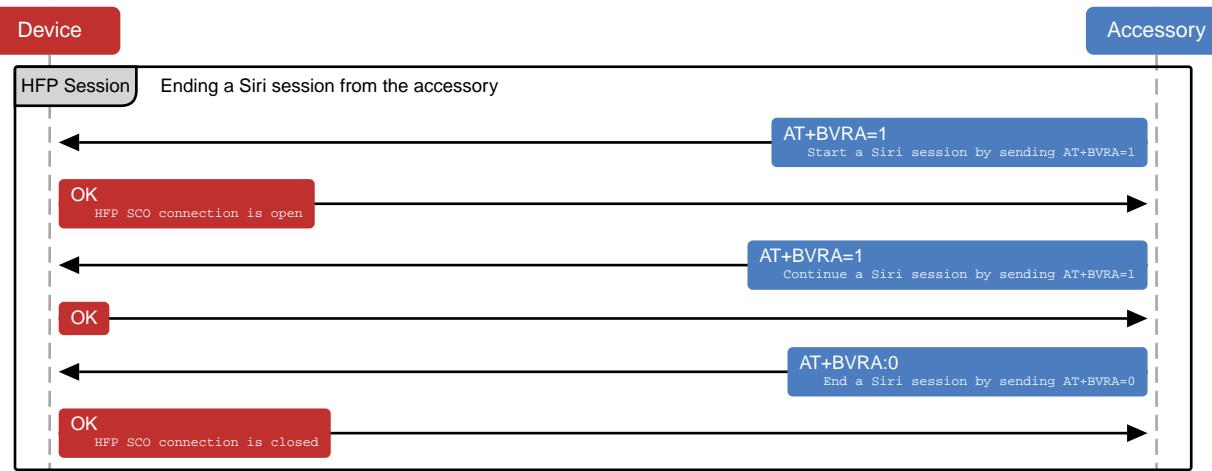

## 17.4 Siri Eyes Free Mode

Siri Eyes Free mode is a feature to control Siri responses that include display information and can be enabled or disabled as needed. In Siri Eyes Free mode, the user experience is tailored towards a driving scenario and interactions with Siri are done primarily via voice to minimize the need for the user to look at a screen. Siri Eyes Free mode is supported only for Bluetooth-enabled vehicle entertainment systems and should not be used by any other accessories. Siri Eyes Free should not be triggered via a voice command.

The device will listen for the HFP AT command AT+APLEFM to enable or disable Siri Eyes Free mode.

This command is used by the device to modify Siri responses that contain visual information or require user interaction. Suitable audio feedback and voice commands will be available to the user based on the Siri use case that was initiated.

Siri Eyes Free mode is disabled by default. Once the accessory has enabled Siri Eyes Free mode, it remains enabled for all subsequent Siri sessions initiated from the accessory until the accessory disables it or the Bluetooth connection is disconnected.

### 17.4.1 HFP Command AT+APLEFM

**Description:** An accessory sends this command to notify a device of the preferred state of Siri Eyes Free mode.

**Initiator:** accessory

**Format:** AT+APLEFM=*value*

**Response:** OK

**Defined Values:**

- 0x00 = Disable Siri Eyes Free mode.
- 0x01 = Enable Siri Eyes Free mode.
- 0x02-0xFF = reserved

**Example:** AT+APLEFM=1

## 17.5 Improving Voice Recognition

The microphone audio that the accessory sends to the device during a Siri session should be suitable for voice recognition. Audio requirements for optimal voice recognition may differ from requirements for optimal human perception (such as during a cellular phone call).

Filtering of the audio signal to remove echoes or feedback noise is acceptable.

To provide the best possible audio quality as Siri input, the accessory must observe the following recommendations:

- **Echo cancellation and noise suppression (EC/NR):** Directional microphones and linear beamforming with microphone arrays giving improved SNR are recommended. Linear echo cancellation for reducing unwanted audio sources (such as audio output from the system) without having any other effect on the speech signal are also recommended. However, single channel noise reduction methods (such as spectrum subtraction) must not be applied, as they will be detrimental to the speech recognition accuracy. Similarly, automatic gain control, residual echo suppression and attempts to blank out non-speech periods in the waveform must not be applied.
- **Signal gain:** When adjusting signal levels, the accessory must avoid artifacts, dropouts, and clipping in all circumstances. Automatic Gain Control is not recommended. If the accessory adjusts signal gain, the gain should be held constant across each spoken utterance. The nominal level measured at the uplink output of the accessory should be A-weighted  $-30 \text{ dB} \pm 2 \text{ dB}$  root-mean-square (RMS), expressed in units relative to full-scale (dBFS(A)). Alternatively, the nominal level may be  $13 \text{ dB} \pm 2 \text{ dB}$  SLR if using the ITU measurement procedure.

- **Signal-to-noise ratio (SNR):** The average SNR should be greater than 20 dB. Below 20 dB, recognition rates will be impacted.
- **Reverberation:** An RT60 time less than 200 ms should be maintained.

### 17.5.1 Wide Band Speech Support

An accessory using Siri should support 16 kHz wide band speech audio for better audio quality and voice recognition performance. See the Bluetooth *Hands-Free Profile* 1.6 specification for details about wide band speech audio. Narrow band audio signal (8 kHz) is supported but not recommended.

## 17.6 Optimizing the Siri Experience

The start of a Siri session should not be accompanied by local beeps or verbal indications (such as an announcement of "...voice dialing...") from the accessory. When a Siri session becomes active, the device sends two beeps indicating that Siri is ready to receive instructions. Adding extra audible notifications only inserts delays in the system.

The accessory should wait for the device to end each Siri session.

The accessory should not send an AT+BVRA=0 command unless it is prompted to do so by user interaction.

The accessory should be capable of rendering audio within 200 ms of SCO connection activation to ensure that the user always hears the Siri introductory beeps.

## 17.7 Common Siri Applications


Siri can send messages, find points of interests, place phone calls, and much more. As Siri capabilities are constantly growing, additional use cases may become available after the initial integration. In Siri Eyes Free mode, some of these use cases may not be accessible as the user experience is tailored towards a driving scenario.

### 17.7.1 Initialization Procedure After Connection is Established


Figure 17-5 (page 77) outlines the sequence the accessory has to trigger to be able to use Siri on a device. After establishing an HFP profile connection, the accessory must first enable the custom Siri commands by sending AT+XAPL and provide the features it supports. After a confirmation is received from the device, the accessory should determine Siri's availability with AT+APLSIRI?.

Vehicles with Bluetooth-enabled infotainment systems can also enable Siri Eyes Free Mode during initialization. This is detailed in [Figure 17-6](#) (page 77).

**Figure 17-5** Siri Initialization Procedure

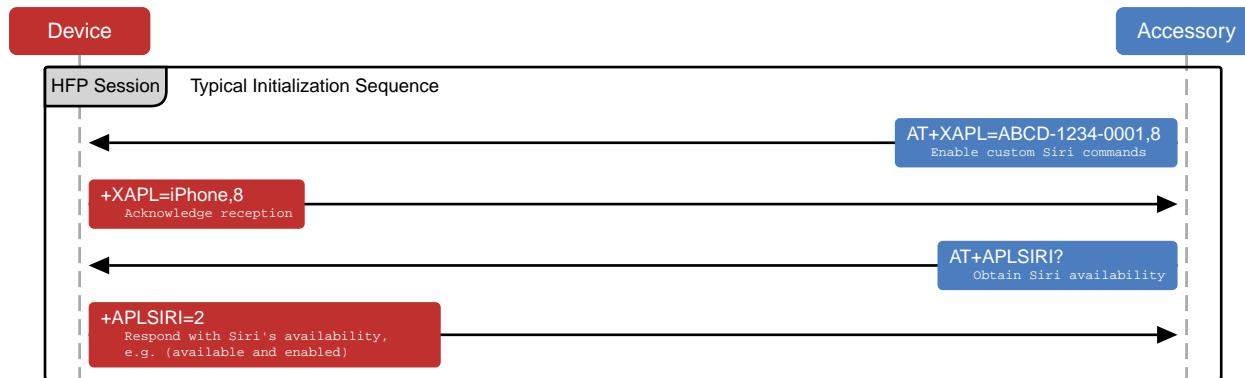

**Figure 17-6** Siri Initialization Procedure with Siri Eyes Free

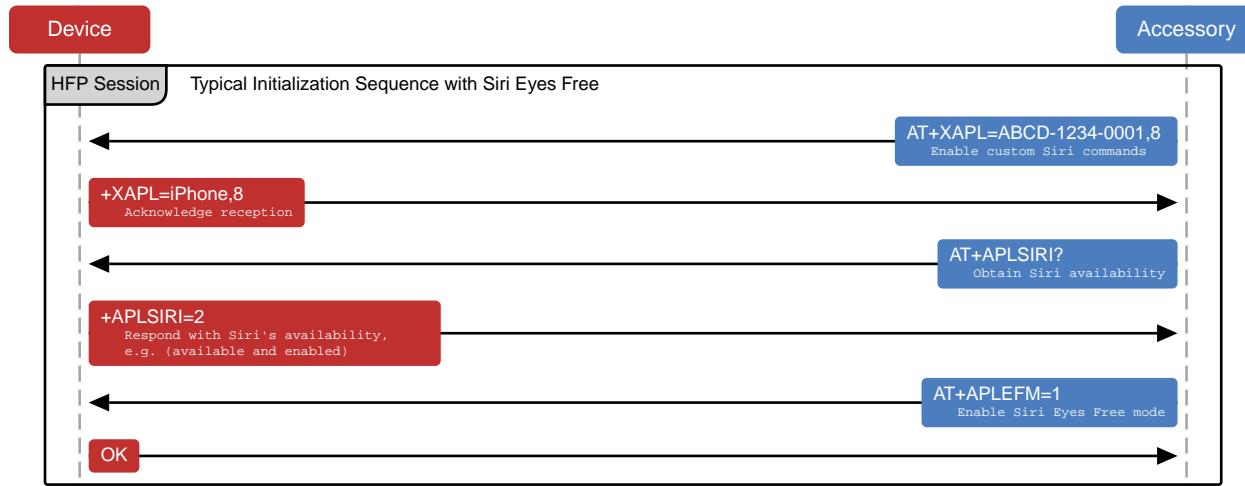

## 17.7.2 Phone Dialing Using Siri

Upon the user's request Siri can initiate an outgoing phone call. The device will initiate HFP call signaling to establish a phone call as described in [Bluetooth](#) (page 98). The accessory must be able to transition to Hands-Free dialing at any time during or after a Siri session when signaled by the device.

### 17.7.3 Audio Routing and Media Playback Using Siri

Siri can control the media playback on a device, and if Siri determines that the user wants to play or pause music it will either start, pause or resume media playback. The device will send a notification to the accessory indicating a change in playback state and any associated track information. The accessory must respond to those notifications, start or stop the music playback as requested, as well as update the correct playback state (e.g. shuffle, repeat).

The accessory must not force a change in the playback state after a Siri session is ended. If music was playing before Siri was started, it must continue playing, if it was paused, it must remain paused.

After Siri starts music playback the accessory must set its current audio route to match the audio source, depending on how audio is being received from the device (via Bluetooth or by a wired connection).

The available media playback notifications depend on the audio route being used:

- Bluetooth audio routes must use the approach described in [Notifications](#) (page 106) and [Audio Data Received via A2DP Profile](#) (page 108).
- Wired audio routes must use iAP2.


### 17.7.4 Turn-By-Turn Directions Using Siri

Siri can initiate active route guidance that will play turn-by-turn directions. In case the device is the active source and is already playing music, turn-by-turn directions will be mixed in as part of the audio stream. In case the device is not playing music, the accessory should be able to mix in turn-by-turn directions with the active audio source.


The device will notify the accessory to play turn-by-turn directions only over Bluetooth. Detailed information on how to distinguish between music playback and turn-by-turn notifications is available in [Notifications](#) (page 106).

## 17.8 User Interaction with Siri Eyes Free in a Vehicle


A vehicle that uses Siri Eyes Free mode must integrate the Siri experience with the existing in-vehicle entertainment system and controls. The vehicle should provide a convenient interface to initiate, continue, and end a Siri session. Once a Siri session is running, the vehicle must display a visual cue that voice recognition is in process. [Figure 17-7](#) (page 79) outlines how a Siri interaction should be designed.

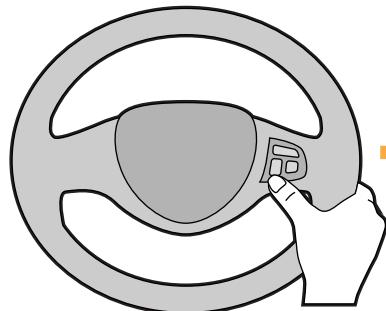**Figure** Siri Eyes Free User Interaction**17-7****Initiate or continue a Siri session**


Long press on the steering wheel to activate; short press to continue (\*\*)

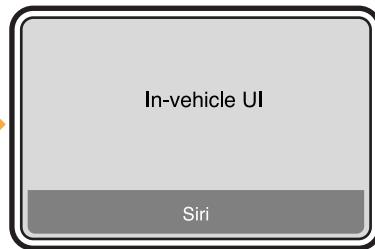


In-vehicle dashboard (\*)

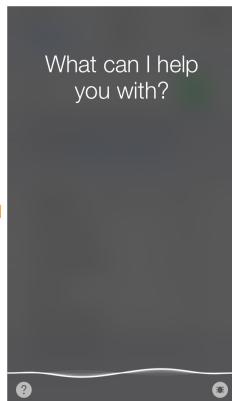

Long press to activate; short tap to continue (\*\*)

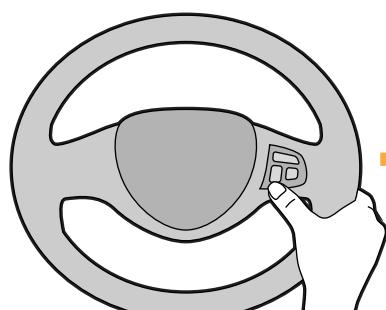**End a Siri session**

Long press to end (\*\*)

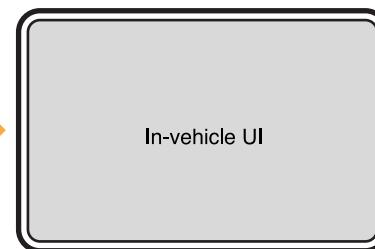

In-vehicle dashboard



Short press to end

(\*) If the accessory wishes to indicate that Siri is active, it must do one of the following:

- Display the word 'Siri' (as capitalized) with no additional text or icon.
- Use generic text or icon that does not resemble the Siri microphone icon.


(\*\*) If the vehicle is equipped with steering wheel controls, the steering wheel must have a dedicated button or a long-press action on a button to start, continue and end a Siri session. The button long-press must be 600 ms or less. If no steering wheel controls are available, a soft button must be available within the in-vehicle user interface to start, continue or end a Siri session.

When a vehicle enables Siri Eyes Free mode, the device will not display any onscreen Siri content. If the device was locked at the time the Siri session was activated from the vehicle, it will remain locked and the screen will not turn on. If the user unlocks or manually activates the device while in an Eyes Free Session there will be a notification that the device is in an active Siri session but there will be no visual Siri content displayed.


## 17.9 Enabling/Disabling Siri from the Device

The user has the ability to disable or enable Siri from the Settings menu on the device. When Siri is disabled, Voice Control becomes the recognition engine on the device and will be triggered by default. The accessory may choose to either launch Voice Control with no further changes, in the same way Siri is launched as in [Figure 17-8](#) (page 80) or display a warning message and not send an activation command to the device as in [Figure 17-9](#) (page 80).

**Figure 17-8** Siri is Deactivated - Launching Voice Control

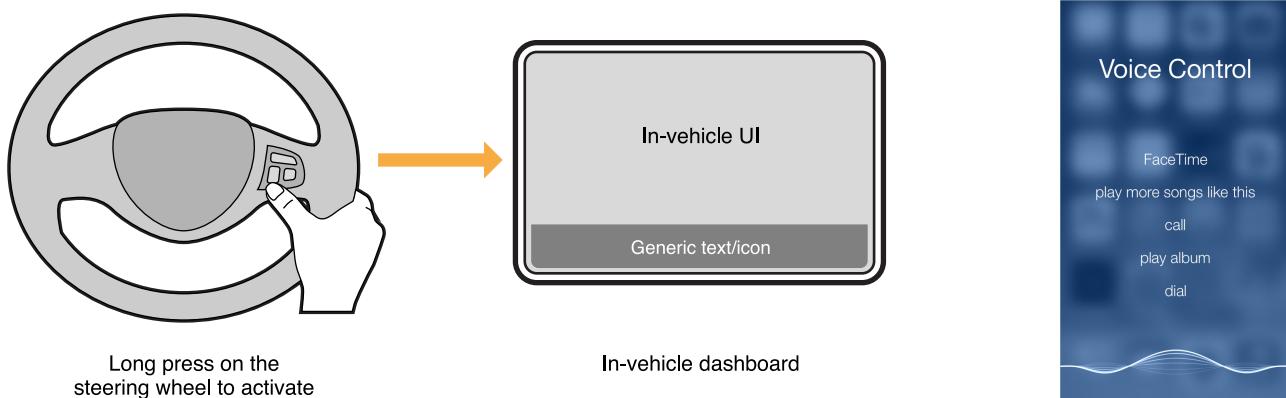

**Figure 17-9** Siri is Deactivated - Displaying a Warning Message

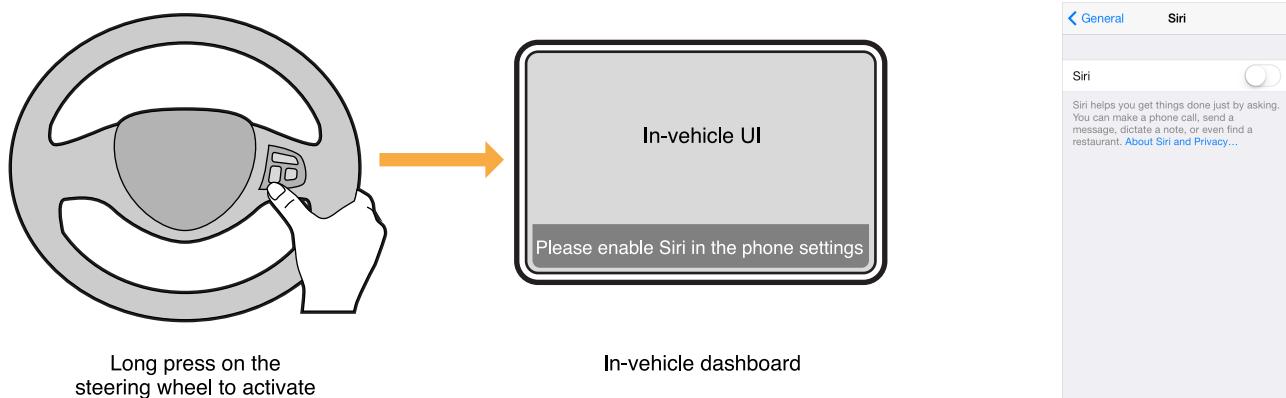

## 17.10 Test Procedures

### 17.10.1 Siri Eyes Free

The following test procedures are applicable to accessories that interact with Siri Eyes Free.

The speaker should be a native speaker of North American English. If the tester's native language is not North American English, set Siri to the speaker's native language and translate the provided phrases to that language.

#### 17.10.1.1 General

1. Pair and establish a Bluetooth Handsfree Profile (HFP) connection between the iPhone and the head unit. Activate Siri from the vehicle steering wheel button (e.g. by press hold):
  - a. Observe that the iPhone screen remains inactive after a Siri session has started (a visual indicator will be visible on the device if the screen is activated manually).
  - b. Ensure that Siri opening chime is heard completely through the vehicle speakers.
  - c. Observe a visual notification in the in-car User Interface (UI) that a Siri session is active (textual notification, on-screen UI, etc.).
2. Activate Siri from the vehicle steering wheel button and say "Send a message to Peter. How are you?". While still saying the message, press the vehicle steering wheel button to cancel Siri (e.g. by press):
  - a. Ensure the iPhone screen remains inactive (if manually activated, the visual indicator on the phone will disappear).
  - b. Verify that the in-car UI for Siri interaction dismisses and the head unit resumes the state before Siri's interaction.
3. Activate Siri from the vehicle steering wheel button and say "How is the weather in San Francisco?". Wait for Siri to respond with the weather forecast. Once the weather forecast is complete, resume Siri from the vehicle steering wheel button and say "What about New York?":
  - a. Observe that the visual indicator is still active on the phone.
  - b. Listen for the Siri opening chime.
  - c. The vehicle UI should be displaying an on-going Siri session.
  - d. Verify that Siri responds with the weather forecast for New York.
4. In case the vehicle UI offers on-screen controls to activate/cancel/resume Siri, repeat steps (1) to (3) for all on-screen controls.
5. Activate Siri from the steering wheel button and say "What's the time". Listen to the current time and do not interact with Siri or the iPhone. After 5 seconds have expired:
  - a. Observe that the visual indicator on the phone is no longer visible.
  - b. The in-car UI for Siri interaction should be dismissed.
  - c. The head unit should resume the state before Siri's interaction.

6. Listen to FM radio from the car speakers (no A2DP streaming active). Press and hold phone's Home button to activate Siri from the phone:
  - a. Observe a visual notification in the in-car UI that a Siri session is active (textual notification, on-screen UI, etc.).
  - b. Observe Siri's interaction on the phone's screen and ask "What's the time?"
  - c. After Siri has responded, lock the phone again to dismiss the Siri session by pressing the phone's sleep/wake or side button.
7. On the phone go to Settings and turn off Siri. Activate Siri from the head unit. Observe one of the following depending on the actual implementation (a) Voice Control starts instead of Siri (b) The head unit displays a warning that Siri Eyes Free is not available.
8. On the phone go to Settings and turn Siri back on. Verify that Siri can be activated/cancelled from the head unit and from the Home button on the phone.
9. Turn Bluetooth off from the Settings on the phone. Verify that Siri cannot be started.
10. Turn Bluetooth back on from the Settings on the phone. Verify that Bluetooth HFP profile reconnects and that Siri can be activated/cancelled from the head unit and from the Home button on the phone.
11. Make sure there is no accessory battery status level indicator icon displayed on the phone's status bar.

### 17.10.1.2 Siri Dialog

1. Activate Siri from the vehicle's steering wheel button and say "Send a text message to **insert contact name**". When Siri prompts for "what would you like it to say", dictate a short message. After Siri has read back your dictated message, say "Review it". After Siri has read back the message again, say "Review it" again. Repeat this cycle ~5 times to ensure that the head unit is able to handle a long interaction with Siri. At the end say "Send it" and verify that the message is sent. Verify that the opening chime is audible and the message is sent. After the Siri session is closed, the audio playback should go back to the state it was before Siri was started, i.e. if it was paused remains paused, if it was playing remains playing.
2. Start Siri from the vehicle's steering wheel button and ask for directions. Follow up through the dialog until the navigation is started. Verify that the Siri session is closed and that the audio playback goes back to the state it was before Siri was started, e.g. if it was paused remains paused, if it was playing remains playing.
3. Start Siri from the vehicle's steering wheel button and say "Search the web for polar bears". Verify that Eyes Free mode is on and that this use case is blocked by Siri. Note: In some implementations the vehicle has to be in motion before Eyes Free is activated by the car kit.
4. Start Siri from the vehicle's steering wheel button and say "What is the current time in Munich?". After Siri has answered but before ~5 seconds have elapsed, resume Siri (e.g. by a short press on the steering wheel button) and verify that Siri is initiated again. Say "What about San Francisco?". Repeat (with a different city) and verify that this can continue indefinitely as long as you short press on the steering wheel button within 5 seconds of the last response.

### 17.10.1.3 Bluetooth HFP A2DP Music

1. Establish a Bluetooth A2DP connection and switch to Bluetooth audio source on the head unit. Activate Siri and ask "Next track". Verify that track advances and that audio is playing through vehicle speakers. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
2. Activate Siri and say "Pause the music". Verify that audio remains paused after Siri has been dismissed. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
3. Pause music playback on the head unit (via AVRCP command). Activate Siri and ask "What time is it?". Verify that the music playback remains paused after the Siri session has been dismissed. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
4. Switch to FM radio on the head unit. Activate Siri and ask "Play me a song". Verify that head unit is able to automatically switch to Bluetooth audio and iPhone music starts playing. Verify that the beginning of the selected track is heard, e.g. there is no skipping of audio packets. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
5. Activate Siri and ask "Shuffle all songs". Verify that head unit correctly updates NowPlaying track information. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
6. Activate Siri and ask to play a specific artist or title. Verify that the Siri session is dismissed after the music starts. Make sure the correct metadata is displayed on the screen. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.

### 17.10.1.4 Call

1. Activate Siri and call a contact with more than one phone number (home and mobile). Wait for Siri's response to ask for which phone number to call. Answer with "home". Verify that call transition is handled correctly by the head unit and any Siri UI displayed on the vehicle screen is dismissed.
2. While iPhone music is playing, activate Siri and say "Call **insert contact name to call**". Verify that call transition is handled correctly by the head unit. Verify that iPhone music playback resumes after the call has been answered and terminated on the far end. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
3. While iPhone music is playing, start Siri and say "Call **insert contact name to call**". Verify that call transition is handled correctly by the head unit. Verify that iPhone music playback resumes after the call has been answered and terminated on the near end (i.e. on the head unit). Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
4. While in a Siri session, receive an incoming call on the head unit. Verify that head unit handles call-signaling correctly and transitions to phone UI once the call has been accepted. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.

### 17.10.1.5 Bluetooth + Wired iAP2

1. Connect device to head unit via a Lightning connector (iPhone 5). Switch to iPod music and verify that audio is playing. Activate Siri and say "Next track". Verify that track advances and head unit displays track metadata correctly. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
2. From the head unit UI, select a playlist with a single song and start playing it. Start Siri from the vehicle steering wheel and say "Play ..... **make sure to select a song to play that is (a) not in the same album as the single-track playlist and (b) not song track index 0 of its album**". Verify that the new song starts playing and that the head unit displays the track metadata for this new song correctly. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
3. Turn Shuffle off on the head unit UI. Then start Siri and say "Shuffle all songs". Verify that the shuffle indicator on the head unit UI is updated and the correct track metadata for the new now playing song is displayed correctly. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
4. Switch to FM radio on the head unit. Activate Siri and say "Play me a song". Verify that head unit is able to automatically switch to iPOD audio source and that audio starts playing through the speakers. Verify that there is no skipping of audio at the beginning of the selected track. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
5. Pause music playback on the head unit (via iAP2 commands). Activate Siri and ask "What time is it?". Verify that music playback remains paused after Siri session has been dismissed. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
6. While iPhone music is playing, start Siri and say "Call **insert contact name to call**". Verify that call transition is handled correctly by the head unit. Verify that iPhone music playback resumes after the call has been answered and terminated on the far end. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
7. While iPhone music is playing, start Siri and say "Call **insert contact name to call**". Verify that call transition is handled correctly by the head unit. Verify that iPhone music playback resumes after the call has been answered and terminated on the near end (i.e. on the head unit). Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.
8. Pause music playback on the head unit (via iAP2 commands). Start Siri and say "Call **insert contact name to call**". Verify that call transition is handled correctly by the head unit. Verify that iPhone music playback remains paused after the call has been answered and terminated on the far end. Verify that the Siri in-car UI is dismissed and the head unit goes back to its initial state.

# Protocols

# 18. USB Power Capability Vendor Request

If the accessory is a USB host, and it does not implement [iAP2 Protocol](#) (page 96), then it may send an Apple-specific USB vendor request to communicate how much power is available to the device. In this case, the accessory must enumerate and identify the presence of a device, then send the vendor request. The vendor request must be sent every time the device is enumerated by the accessory.

**Table 18-1** USB Vendor Request for non-iAP2 accessory USB Embedded Host

Field	Value	Comments
bmRequestType	0x40	Device-to-host request, vendor-defined type, device is recipient.
bRequest	0x40	Vendor-defined USB get enabled capabilities request.
wValue	See comments.	Charging current available, expressed as an offset from 500 mA. Must be 500 (1000 mA charging current available), 1000 (1500 mA charging current available), 1600 (2100 mA charging current available), 1900 (2400 mA charging current available), or 2500 (3000 mA charging current available).
wIndex	See comments.	Must be the same as wValue.
wLength	0	0 bytes expected.

# 19. USB D+/D- Resistor Networks


Accessories that do not implement any of the following may use USB resistor networks to identify their current capability:

- iAP2, see [iAP2 Protocol](#) (page 96).
- USB enumeration or vendor commands, see [USB Power Capability Vendor Request](#) (page 86).
- USB-C Current, see [USB-C Current](#) (page 91).
- USB Power Delivery, see [USB Power Delivery](#) (page 90).

## 19.1 Electrical

The accessory must connect the USB D+ and USB D- pins to resistor networks as shown in [Figure 19-1](#) (page 87).

**Figure 19-1** USB D+/D- resistor networks

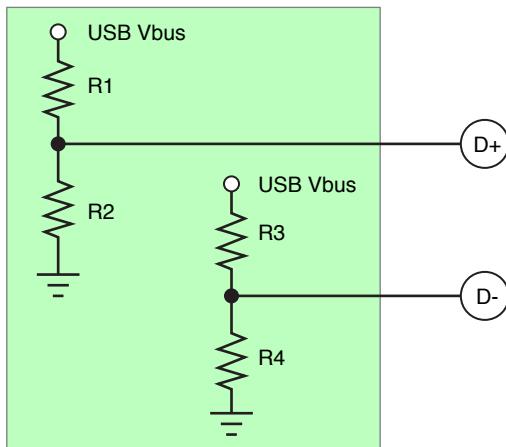

---

**Note:** Every iOS device-compatible connector on an accessory that uses a USB resistor network must have its own set of resistors. The accessory must be capable of supplying the total current required when all connectors are in use, regardless of whether the connectors are compatible with devices or not.

---

The resistor network must be connected at all times unless the accessory uses one of the following methods to enable charging or detect the presence of a device. In these cases, it must immediately present the resistor network.

- The accessory uses a direct user action to enable charging.
- The accessory senses the attachment of the device via electromechanical means such as a contact switch.

The accessory must not monitor the USB D+ and USB D- pins to detect the presence of a device.

---

**Note:** All resistors used to implement the networks specified in [Figure 19-1](#) (page 87) must have a tolerance of 1% or better. The resistor network must not be emulated by driving the voltage of the USB D+/D- pins using some other means.

---

**Table 19-1** USB D+/D- resistor values

Max Current	R1	R2	R3	R4
3000 mA	43.2 kΩ	49.9 kΩ	24.9 kΩ	49.9 kΩ
2400 mA	43.2 kΩ	49.9 kΩ	43.2 kΩ	49.9 kΩ
2100 mA	43.2 kΩ	49.9 kΩ	75.0 kΩ	49.9 kΩ
1000 mA	75.0 kΩ	49.9 kΩ	43.2 kΩ	49.9 kΩ

## 19.2 Identifying Power Source Current Limit

Accessories must take into account the variation of USB VBUS voltage and resistor tolerances.

The resistor network values and corresponding current source limit should be identified using the following procedure:

1. Read the VBUS voltage using an ADC. If value is less than 4.5 V, return no resistors detected.
2. Pull-down the D+ and D- lines and read the voltage using an ADC. If either voltage value is less than 1 V, return no resistors detected.
3. Disable the D+ and D- pull-downs and allow the voltage to return to normal.
4. Read the D+ and D- voltages using an ADC (to determine the value for R1 and R3 respectively):
  - If the voltage is >2.995 V (based on 1 MΩ load impedance), then assume a resistor value of 24.9 kΩ.
  - If the voltage is between 2.320 V and 2.995 V (based on 1 MΩ load impedance), then assume a resistor value of 43.2 kΩ.
  - If the voltage is < 2.320 V (based on 1 MΩ load impedance), then assume a resistor value of 75.0 kΩ.

## 19. USB D+/D- Resistor Networks

### 19.2 Identifying Power Source Current Limit

5. Determine the max current based on [Table 19-2](#) (page 89).
6. If resistor values could not be identified, proceed to identify the power available based on the *USB Battery Charging 1.2* specification.

**Table 19-2** USB D+/D- resistor values

Max Current	R1	R2	R3	R4
500 mA	75.0 kΩ	49.9 kΩ	75.0 kΩ	49.9 kΩ
1000 mA	75.0 kΩ	49.9 kΩ	43.2 kΩ	49.9 kΩ
1000 mA	75.0 kΩ	49.9 kΩ	24.9 kΩ	49.9 kΩ
2100 mA	43.2 kΩ	49.9 kΩ	75.0 kΩ	49.9 kΩ
2400 mA	43.2 kΩ	49.9 kΩ	43.2 kΩ	49.9 kΩ
3000 mA	43.2 kΩ	49.9 kΩ	24.9 kΩ	49.9 kΩ
1000 mA	24.9 kΩ	49.9 kΩ	75.0 kΩ	49.9 kΩ
1000 mA	24.9 kΩ	49.9 kΩ	43.2 kΩ	49.9 kΩ
1000 mA	24.9 kΩ	49.9 kΩ	24.9 kΩ	49.9 kΩ

## 20. USB Power Delivery

Accessories either providing USB Power Delivery (USB-PD) or drawing power from USB-PD sources must comply with the *USB Power Delivery Specification, Revision 3.0*, version 1.2.

Accessories implementing USB-PD must incorporate a PD controller that is USB-IF certified with a *Silicon Test ID* from the USB-IF.

Accessories drawing power from USB-PD sources must correctly identify all sources as defined in the *USB Power Delivery Specification, Revision 3.0*, version 1.2.

Apple recommends the GRL-USB-PD-C2 (see <https://graniteriverlabs.com/usb-pd-c2/>) for USB-PD testing and compliance verification.

## 21. USB-C Current

Accessories either providing direct power via USB-C Current or drawing power from USB-C Current sources must comply with the *USB Type-C Cable and Connector Specification Release 1.3*, section 4.6.2.

Apple recommends the GRL-USB-PD-C2 (see <https://graniteriverlabs.com/usb-pd-c2/>) for USB-C Current testing and compliance verification.

# 22. Advanced Audio Distribution Profile (A2DP)

Accessories may implement the Advanced Audio Distribution Profile (A2DP) over [Bluetooth](#) (page 98) to receive audio from iOS devices and Mac computers.

The audio content from the device can be broadly classified into two categories:

- Audio content from music, video, or gaming applications.
- System-generated sounds for alerts and notifications.

A2DP is often implemented in speakers and headsets.

Accessories that implement A2DP must satisfy all requirements stated in [Bluetooth](#) (page 98).

## 22.1 Bluetooth A2DP Specification

Every accessory that implements the Advanced Audio Distribution Profile must meet the requirements of the Bluetooth *Advanced Audio Distribution Profile* specification, Version 1.2.

### 22.1.1 AVDTP Transactions

Accessories must respond to Audio/Video Distribution Transport Protocol (AVDTP) signaling transactions before the device's 5 second RTX\_SIG\_TIMER expires or the device will terminate the signaling channel. See Section 6.2 "Transaction Model" and section 6.4 "Signal Command Set" of the Bluetooth *Audio/Video Distribution Transport Protocol*, Version 1.3.

## 22.2 SubBand Codec (SBC)

The SBC Codec Specific Information Elements, defined in Section 4.3.2 of the A2DP specification, that are applicable to iOS devices and Mac computers are listed in [Table 22-1](#) (page 92).

**Table 22-1** SubBand Codec Information Elements for iOS devices and Mac computers

Element	Value
Sampling Frequency	44,100 Hz
Channel Mode	Stereo
Block Length	16

Element	Value
Subbands	8
Allocation Method	Loudness
Bitpool range	2 to 53. Accessories for iOS devices and Mac computers should support 53.

## 22.3 MPEG 2/4 AAC Codecs

Devices support the non-mandatory codec MPEG-2/4 AAC, as defined in Section 4.5 of the *Advanced Audio Distribution Profile* specification, Version 1.2. Accessories should use the AAC codec in addition to SBC, because it provides higher audio quality for a given bit rate.

---

**Note:** The following specifications provide details of Apple's implementation of the MPEG-2/4 AAC codec. In case of conflicts, the A2DP specification governs.

---

The MPEG 2/4 AAC Codec Specific Information Elements, defined in Section 4.5 of the A2DP specification, that are applicable to devices are listed in [Table 22-2](#) (page 93).

**Table 22-2** MPEG-2/4 AAC Codec Information Elements for devices

Element	Value
Object Type	MPEG-2 AAC LC
Sampling Frequency	44,100 Hz
Channels	2
Bit rate	264,630 bps
VBR	0

AAC audio stream packets in devices have the structure shown in [Table 22-3](#) (page 93).

**Table 22-3** AAC audio packet for devices

L2CAP	AVDTP	MPEG-4 LATM	MPEG-4 AAC
Header	Header	AudioMuxElement	Audio Payload

The AAC Media Payload Format, as defined in Section 4.5.4 of the A2DP specification, is formatted using LATM, as defined in Section 4 of *IETF RFC 3016*. The following notes apply to the packet fields shown in [Table 22-3](#) (page 93).

- The recommended L2CAP MTU value for each device's AAC streaming channel is 885 bytes.
- The AVDTP Header is shown as the RTP header in Figure 4 of RFC 3016, and is the header defined in Section 7.2.1 of the *Bluetooth Audio/Video Distribution Transport Protocol*, Version 1.2.

- The AudioMuxElement is the same as the RTP payload in RFC 3016. It is defined in Section 1.7.3, Table 1.41 in ISO/IEC 14496-3:2009, subpart 1. The muxConfigPresent argument to the AudioMuxElement is set to 1 (in-band mode), as recommended in Section 4.1 of RFC 3016. As recommended in Section 4.3 of RFC 3016, only one AudioMuxElement is put into each AVDTP packet.
- The audio payload is encoded using MPEG-4, as recommended in Section 4.5.4 of the A2DP specification.
- The accessory should support AAC-LC VBR and handle bit rate changes without audio gaps. Devices will vary AAC bit rate depending on the content.

## 22.4 Test Procedures

### 22.4.1 Audio Quality

Verify that there are no audio quality issues in each of the following scenarios:

1. Stream music from the Music app.
2. Stream music from a radio station within the Music app.
3. Stream audio using the Podcast app.

### 22.4.2 Audio Switching

1. During A2DP streaming, switch audio back to device and switch back to accessory.
2. Audio should be routed to the intended source. Audio quality should be good switching back to Bluetooth.

### 22.4.3 HFP Interaction

1. Make incoming / outgoing call during A2DP.
2. Audio should be suspended during the call and resume after the call.

### 22.4.4 Siri

1. Trigger Siri during A2DP.
2. Audio should be resumed after the Siri session.

### 22.4.5 Video Playback

1. Stream A2DP while watching a video.

## **22. Advanced Audio Distribution Profile (A2DP)**

### **22.4 Test Procedures**

---

- 2.** Audio / video synchronization and quality should be good.

## 23. iAP2 Protocol

Third-party accessories may use the iAP2 protocol to access advanced device features. One such feature is the ability to communicate securely with third-party iOS applications via the iOS External Accessory Framework (<http://developer.apple.com/library/ios/#featuredarticles/ExternalAccessoryPT/Introduction/Introduction.html>).

Use of iAP2 requires accessory developers to be a member of the Apple MFi licensing program (<https://developer.apple.com/programs/mfi>) and integrate specific MFi hardware into the accessory.

# Transports

# 24. Bluetooth

Accessories that integrate Bluetooth technology must comply with the requirements stated in this chapter.

Every accessory that is compatible with a device must support the *Bluetooth Core Specification* Version 2.1 + EDR or higher. This specification introduced the important security feature Secure Simple Pairing as well as Extended Inquiry Response.

## 24.1 Enhanced Data Rate

The Enhanced Data Rate (EDR) feature introduced in the *Bluetooth 2.0* specification enables accessories to communicate more efficiently. Every accessory must use EDR for the following reasons:

- It provides higher data rates compared to Basic Data Rate (BDR).
- It communicates more efficiently, transferring more data bits per unit of time.
- It reduces the power consumption used per bit transferred.
- It improves coexistence with Wi-Fi and other connected Bluetooth devices because it frees up more air time.
- It improves performance in multipoint configurations.

## 24.2 Adaptive Frequency Hopping

The Adaptive Frequency Hopping (AFH) feature introduced in the *Bluetooth 1.2* specification improves coexistence with Wi-Fi and other connected Bluetooth devices. Every accessory must use AFH.

## 24.3 Sniff Mode for Low Power Consumption

Minimizing power consumption is critical for all mobile devices. Therefore, every accessory that is compatible with a device:

- Must support and should request Bluetooth sniff mode.
- Must accept requests for sniff mode and support all valid parameters listed in the Bluetooth specification.

- Must support a sniff interval of 15 ms.
- Should use the following recommended sniff mode values:
  - Max Interval: 15 ms
  - Min Interval: 15 ms
  - Sniff Attempt: 1
  - Sniff Timeout: 0
- Must not renegotiate sniff after being established.
- Must support sniff subrating.

Accessories that are compatible with iOS devices and Mac computers should also use sniff mode as much as possible, especially when there is little or no data being transmitted over the Bluetooth link. Besides its power consumption advantages, sniff mode enables better antenna sharing with Wi-Fi.

The sniff mode parameters are specific to the usage model and Bluetooth profile. The device expects the accessory to request sniff mode with appropriate parameters for a specific usage. If the accessory does not send such a request, the device may send a sniff mode request. When the device sends a request for sniff mode, the remote device must accept the request and its parameters without negotiation.

If the accessory sets the sniff mode parameters, the accessory must set the sniff interval to less than a third of the Bluetooth baseband Link Supervision Timeout, see [Link Supervision Timeout](#) (page 101). This makes the Bluetooth link less susceptible to interference. To improve link robustness, the accessory should use a shorter sniff interval instead of multiple sniff attempts.

Links with a sniff interval of 1 second or more make the slave device open up a large correlation window, which has to be taken into account when calculating the number of sniff attempts. With sniff intervals shorter than 1 second, multiple sniff attempts can improve link robustness but will increase power consumption.

## 24.4 Role and Topology Management

Every accessory that is compatible with a device must:

- Accept a request for Role Switch from a device.
- Continue with the connection when the device rejects a request for Role Switch.

In a Bluetooth connection, one device is the master and the other the slave. The master can have multiple slaves, thus forming a piconet. The master can also be a slave to another master, creating a scatternet.

Such a scenario creates complications since the device has to alternate between the two piconets and thus wastes valuable bandwidth. Managing the topology of the network is therefore important for maximum performance. The device may request a Role Switch, depending on its current topology, and the remote device must accept the request. The device may also reject a request for a Role Switch because of topology concerns. Having a suboptimal topology may degrade the audio quality and the user's experience.

The accessory should avoid requesting to be the master as the device will need to be the master in more frequently occurring scenarios. Accessories that always insist on being the master may impact the overall user experience.

Accessories that connect to multiple iOS devices or Mac computers simultaneously must support creating a scatternet.

## 24.5 Extended Inquiry Response

Every accessory that is compatible with a device must provide the following information in its Extended Inquiry Response packet:

- The Local Name of the accessory (Complete or Shortened).
- The TX Power Level.

During the Bluetooth discovery process, the device prefers to display the Friendly Name of discovered accessories. Before the 2.1 version of the Bluetooth specification the device would have to set up a connection to the accessory and do a Remote Name Request, which takes power, antenna time, and user's time. The Extended Inquiry Response feature, introduced in Bluetooth 2.1, lets an accessory send its Local Name and other information as part of the Inquiry Response and thereby increase the speed and efficiency of the discovery process.

The Local Name should match the accessory's markings and packaging and not contain ':' or ';'. The accessory may append up to 6 differentiating characters to the Local Name, such as the last few digits of the serial number or MAC address, if a user is likely to encounter more than one of the accessories at the same time.

If the accessory allows the user to customize the Local Name parameter, the accessory should provide a means to restore the factory default name.

## 24.6 Secure Simple Pairing

Every accessory that is compatible with a device must:

- Use Secure Simple Pairing.
- Use the Numerical Comparison method if it has a display and input device supporting it.

Secure Simple Pairing greatly increases security and is a mandatory security feature introduced in the Bluetooth 2.1 specification. To protect against a man-in-the-middle attack, the Numerical Comparison association model should be used whenever feasible. See Volume 1, Section 5.4 in the *Bluetooth Core Specification*, Version 2.1 + EDR.

## 24.7 Pairing Button

If the accessory has a dedicated pairing control surface and it is labeled, it should use official Bluetooth branding. See <https://www.bluetooth.com/marketing-branding/brand-best-practices-guidelines>.

## 24.8 Class of Device (CoD)

iOS devices and Mac computers use the accessory's Class of Device for UI purposes or to configure specific features.

Every accessory that is compatible with a device must accurately set its Class of Device using the Bluetooth SIG defined Major Device Class and Minor Device Class. See Volume 3, Part C, Section 3.2.4 in the *Bluetooth Core Specification*, Version 5.0.

For example, an audio/video accessory intended to operate in a vehicle should set Major Device Class to *audio/video* and Minor Device Class to *car-audio*.

## 24.9 Link Supervision Timeout

The link supervision timeout is used to detect link loss between the accessory and the device.

The accessory must set the link supervision timeout to 2 seconds or greater when it is the master to account for the unpredictable nature of RF signals as well as the device's need to service other concurrent wireless systems.

## 24.10 Delay Reporting

Devices (as of iOS 8.2) support the Delay Reporting commands as specified in the *Bluetooth Audio/Video Distribution Transport Protocol*, Version 1.3. Accessories should provide this information as it is used to improve audio/video synchronization for video playback. Accessories should not report a delay of more than 1000 ms and should not update the delay more than 1 time per second.

## 24.11 Profiles

The Apple knowledge base article <https://support.apple.com/kb/ht3647> provides a complete list of the Bluetooth profiles that certain devices support. The Bluetooth specifications are the starting point for designing accessories that are compatible with these products. The following sections add information and requirements for some profiles, which can help accessory developers achieve superior results.

### 24.11.1 Device ID Profile (DID)

Every accessory that is compatible with a device must:

- Support the Bluetooth Device ID Profile, version 1.3 or higher.
- Use the company identifier from the Assigned Numbers specification assigned by the Bluetooth SIG as its Vendor ID value (VID). See <http://www.bluetooth.org/Technical/AssignedNumbers/identifiers.htm> (requires login). Bluetooth HID Profile accessories may use a VID assigned by the USB Implementers Forum (USB-IF at <http://www.usb.org>) if the manufacturer does not have a Bluetooth SIG company identifier.
- Use its VID value for the end product manufacturer.
- Not use the Company ID assigned to Apple by the Bluetooth SIG or the Vendor ID assigned to Apple by the USB Implementers Forum.
- Use the Vendor ID Source field to identify which organization assigned the value used in Vendor ID field value. See Section 5.6 of the *Bluetooth Device ID Profile Specification*.
- Use a ProductID value that uniquely identifies the product.
- Use a Version value that uniquely identifies the software version.

The Device ID record lets the device identify the implementation of the remote accessory. This is valuable information and can be used to bridge alternate interpretations of the Bluetooth specification when communicating with a remote accessory. Therefore it is important that the information in the Device ID record uniquely identify the implementation.

In the case of Bluetooth car kit devices, the same car kit might go into two different car models. Ideally the two car kits should have different ProductIDs. However, it is acceptable for them to have the same ProductID as long as they have identical hardware, software, and features. If the implementations differ at all, they should have different ProductIDs. The accessory can also use a secondary Device ID record to uniquely identify the product ID or model number.

## 24.11.2 Service Discovery Protocol (SDP)

To facilitate caching of Service Discovery Protocol (SDP) service records, every accessory that is compatible with a device must:

- Support the ServiceDiscoveryServer Service Class.
- Support the ServiceDatabaseState attribute.
  - The attribute's value must change whenever any SDP service record or attributes within a record are added, removed, or modified.
  - The attribute's value must not change based on RFCOMM channel protocol parameters since devices query these values separately at connection time.

## 24.11.3 Hands-Free Profile (HFP)

Every accessory that is compatible with a device and supports the Handsfree Profile should meet the requirements of the *Bluetooth Hands-Free Profile Specification*, Version 1.5 or higher. Additional Apple requirements are specified in this section.

Remote accessories can use the Bluetooth *Hands-Free Profile* for phone communications. To achieve the best user experience, the remote accessory should support the following features, which are optional in the Bluetooth specification.

### 24.11.3.1 Remote Audio Volume Control

Every accessory that is compatible with a device and supports HFP should:

- Support Remote Audio Volume Control so the speaker volume on the Hands-Free accessory can be controlled from the device as described in Section 4.28 in the *Bluetooth Hands-Free Profile Specification* version 1.5.
- Set the Remote volume control bit in the Supported Features bitmap sent with the AT+BRSF= command.

In some situations it is easier for the user to control the output volume through the device instead of directly on the remote accessory. For example, a passenger (or-if the car is parked-the driver) in a car could use the volume slider on the phone to control the audio volume. Volume control synchronization is outlined in Section 4.48.2 in the *Bluetooth Hands-Free Profile Specification* version 1.5.

### 24.11.3.2 Indicator Event Reporting

Every accessory that is compatible with a device and supports HFP should use indicator events reporting and not perform repetitive polling of status.

iOS devices and Mac computers support all mandatory and optional indicators specified in HFP version 1.5 (service, call, callsetup, callheld, signal, roam, battchg). To minimize unnecessary polling of status using the AT+CIND? command, the remote accessory should enable indicator events reporting by sending an AT+CMER command. The device will then send a +CIEV event when there is a change in status of an indicator. The remote accessory should request the initial status using the AT+CIND=? and AT+CIND? commands, according to the HFP specification.

### 24.11.3.3 Voice Recognition Activation

Every accessory that is compatible with a device and supports HFP must:

- Support Voice Recognition Activation, both AG and HF initiated as described in Section 4.25 in the *Bluetooth Hands-Free Profile Specification* version 1.5.
- Set the Voice Recognition Activation bit in the "SupportedFeatures" bitmap sent with the AT+BRSF= command.

iOS devices and Mac computers support voice recognition initiated by remote (Hands-Free) accessories and iOS (Audio Gateway) accessories.

### 24.11.3.4 Echo Cancellation and Noise Reduction

When echo cancellation and noise reduction are performed locally on a Hands-Free accessory, it should turn off echo cancellation and noise reduction on the device by sending an AT+NREC command, as described in Section 4.24 in the *Bluetooth Hands-Free Profile Specification* version 1.5.

iOS devices and Mac computers support echo cancellation and noise reduction; these features are active by default. If a Hands-Free accessory also does echo cancellation and noise reduction it needs to turn these features off on the device (the Audio Gateway). This avoids unnecessary degradation of audio quality due to double audio processing.

### 24.11.3.5 In-Band Ringing

Every accessory that is compatible with a device and supports HFP should also support In-Band Ringing as specified in Section 4.13.1 in the *Bluetooth Hands-Free Profile Specification* version 1.5. If the user sets a ring tone on the device, the same ring tone should sound on the hands-free accessory.

### 24.11.3.6 Synchronous Connection

Every accessory that is compatible with a device and supports HFP must:

- Support eSCO parameter set S2 and S3 and accept requests for these settings. See Section 5.6 of the *Bluetooth Hands-Free Profile Specification* version 1.5.
- Request eSCO parameter set S2 or S3 when setting up a Synchronous Connection. Note that eSCO parameter set S1 should not be requested.
- Render audio within 40 ms after the SCO/eSCO connection has been set up.

The eSCO packet types offers retransmission of packets; traditional SCO packets are not retransmitted. This improves audio quality and the user's experience. The eSCO packet types 2-EV3 and 3-EV3 offer a greater time interval between packets, which can improve Wi-Fi performance and allow time for other concurrent Bluetooth connections to send data. Apple strongly recommends the use of 2-EV3 and 3-EV3 packets for SCO connections. Using HV3 packets is highly discouraged. HV3 packets require more link time and does not allow for retransmission of audio packets which impacts the audio performance in presence of RF interference.

### 24.11.3.7 Wide Band Speech

Every accessory that is compatible with a device and supports HFP should support Wide Band Speech as described in Section 5.7.4 of the *Bluetooth Hands-Free Profile* specification version 1.6. If Wide Band Speech is supported, it should support the T2 link parameter settings.

All devices running iOS 5 or later support Wide Band Speech. If both the device and the accessory support Wide Band Speech then Wide Band Speech link will be used for eSCO connection for use cases like cellular calls, FaceTime and Siri.

### 24.11.4 Message Access Profile (MAP)

Every accessory that is compatible with a device and supports MAP must:

- Support Message Notification as described in Section 4.1 of the *Bluetooth Message Access Profile Specification*, version 1.0.
- Register for notifications immediately after the connection is established, as described in Section 4.5 in the *Message Access Profile Specification*, version 1.0.
- Not expect the TEL property to be present in the originator VCARD (the properties N and FN will be included). See Section 3.1.3 in the *Message Access Profile Specification*, version 1.0.
- Not provide a user interface for sending messages. Devices do not support sending messages using MAP.

All devices running iOS 6.0 or later support MAP.

## 24.11.5 Audio/Video Remote Control Profile (AVRCP)

Every accessory that is compatible with a device and supports the Audio/Video Remote Control Profile should meet the requirements of the *Bluetooth Audio/Video Remote Control Profile Specification*, Version 1.4. Additional Apple requirements are specified in this section.

### 24.11.5.1 Supported Operations

iOS devices and Mac computers support the following operation\_IDs in passthrough commands:

- Play
- Stop
- Pause
- Fast Forward
- Rewind
- Forward
- Backward

### 24.11.5.2 Repeat and Shuffle Modes

Every device supports Repeat and Shuffle modes in the role of an AVRCP target. An AVRCP controller may use SetPlayerApplicationSettingValue to set a value on the device and GetPlayerApplicationSettingValue to read a value, as described in Sections 6.5.4 and 6.4.3 of the *Bluetooth Audio/Video Remote Control Profile Specification* version 1.4.

### 24.11.5.3 Notifications

Every accessory that is compatible with a device and supports AVRCP should register for notifications and not perform repetitive polling to determine the status of the device.

Every device supports registering for notifications in the role of an AVRCP Target, as described in Section 6.7 of the *Bluetooth Audio/Video Remote Control Profile Specification* version 1.4. The commands RegisterNotification and GetPlayStatus are supported for these notifications:

- EVENT\_PLAYBACK\_STATUS\_CHANGED
- EVENT\_TRACK\_CHANGED
- EVENT\_NOW\_PLAYING\_CONTENT\_CHANGED
- EVENT\_AVAILABLE\_PLAYERS\_CHANGED
- EVENT\_ADDRESSED\_PLAYER\_CHANGED
- EVENT\_VOLUME\_CHANGED

#### 24.11.5.4 Play/Pause Button

All accessories that support AVRCP and implement a Play/Pause control surface must confirm the playback status of the device via AVRCP [Notifications](#) (page 106) before sending a Play or Pause command, see [Supported Operations](#) (page 106). Specifically:

- If the device has notified the accessory that it is paused, pressing the accessory's Play/Pause control surface should send a Play command.
- If the device has notified the accessory that it is playing, pressing the accessory's Play/Pause control surface should send a Pause command.
- The accessory should not infer device playback status based on the number of times the Play/Pause control surface has been pressed.

#### 24.11.5.5 Volume Handling

Every accessory that is compatible with a device and supports AVRCP should support Absolute Volume, as described in Section 6.13 of the *Bluetooth Audio/Video Remote Control Profile Specification* version 1.4.

Every device supports volume handling in the role of AVRCP Controller.

#### 24.11.5.6 Browsing

Every accessory that is compatible with a device and supports Browsing (in controller role) as part of AVRCP must:

- Not try to index or cache the entire library upon connection. The device may contain tens of thousands of media items, each present multiple times in the hierarchy.
- When browsing a specific folder, do not fetch all its items. Only fetch those that are displayed to the user. It may prefetch a few items to improve the responsiveness of the user interface.
- Not reorder items (e.g. alphabetically).
- Not assume UIDs to be statically defined, especially in the root folder. The ordering and UIDs of folders and items may change at any point in future releases.
- Send the `SetBrowsedPlayer` command after receiving an `EVENT_UIDS_CHANGED` notification.
- Not assume that the UID passed to the `PlayItem` command will result in the media player playing that UID.

Currently only the built-in Music app supports browsing. When switching between players, an `EVENT_AVAILABLE_PLAYERS_CHANGED` notification and an `EVENT_ADDRESSED_PLAYER_CHANGED` notification will be generated. The UI then needs to look at the feature bit mask of the listed player to determine whether browsing is currently available.

All devices running iOS 6.0 or later support AVRCP Browsing.

### 24.11.5.7 iOS App-Provided Metadata

An audio app running on a device may use the iOS Media Player Framework to provide metadata about the current audio stream. The device supplies this metadata to the accessory using AVRCP.

Requirements and usage for these messages may be found in the `MPNowPlayingInfoCenter` class in Apple Media Player Framework documentation.

### 24.11.6 Advanced Audio Distribution Profile (A2DP)

See [Advanced Audio Distribution Profile \(A2DP\) \(page 92\)](#).

## 24.12 Audio Routing

This section describes how an accessory can differentiate between various audio contents coming from a device and use this information to decide playback behavior.

An accessory can receive audio data from the device via either of two Bluetooth profiles:

- HFP using eSCO channel
- A2DP using ACL channel

The device picks which channel to use depending on how the audio content is used. An audio path created for two way communication (such as phone calls or FaceTime) always uses the HFP (eSCO) route for sending audio data. Music and similar content uses the A2DP route. In the absence of a defined route, audio playback will default to the device.

### 24.12.1 Audio Data Received via HFP Profile

Most of the audio content sent via HFP (eSCO) routes requires two way communication. Cases where HFP (eSCO) is used include (but are not limited to) cellular calls, FaceTime, and voice mail.

The accessory speaker and microphone should be dedicated to the HFP (eSCO) route and not mixed/muxed with any other audio sources.

### 24.12.2 Audio Data Received via A2DP Profile

Audio content transferred via A2DP profiles can be broadly classified into two categories:

- Audio content from music, video, or game-like applications.
- System-generated sound for alerts and notifications.


### 24.12.2.1 Differentiating Audio Content from System Sounds

Music-like content can be differentiated from system sound by adding support for Audio/Video Remote Control Profile (AVRCP) version 1.3 or later. The AVRCP profile allows an accessory to be aware of the audio playback state in the device, using notifications. See [Audio/Video Remote Control Profile \(AVRCP\)](#) (page 106).


When a device initiates audio playback over an A2DP channel for playing music content, an AVRCP notification EVENT\_PLAYBACK\_STATUS\_CHANGED is sent to indicate that playback status has changed to play state. See Section 6.7.2 of the *Audio/Video Remote Control Profile* specification, version 1.4. This indicates that audio data via the A2DP profile contains music. When a device initiates audio playback over an A2DP channel for playing system sound, no AVRCP notification is sent.

[Figure 24-1](#) (page 109) and [Figure 24-2](#) (page 110) show the difference between the notifications for music playback and for system sounds.

**Figure 24-1** Initiate Audio Playback (e.g. music)

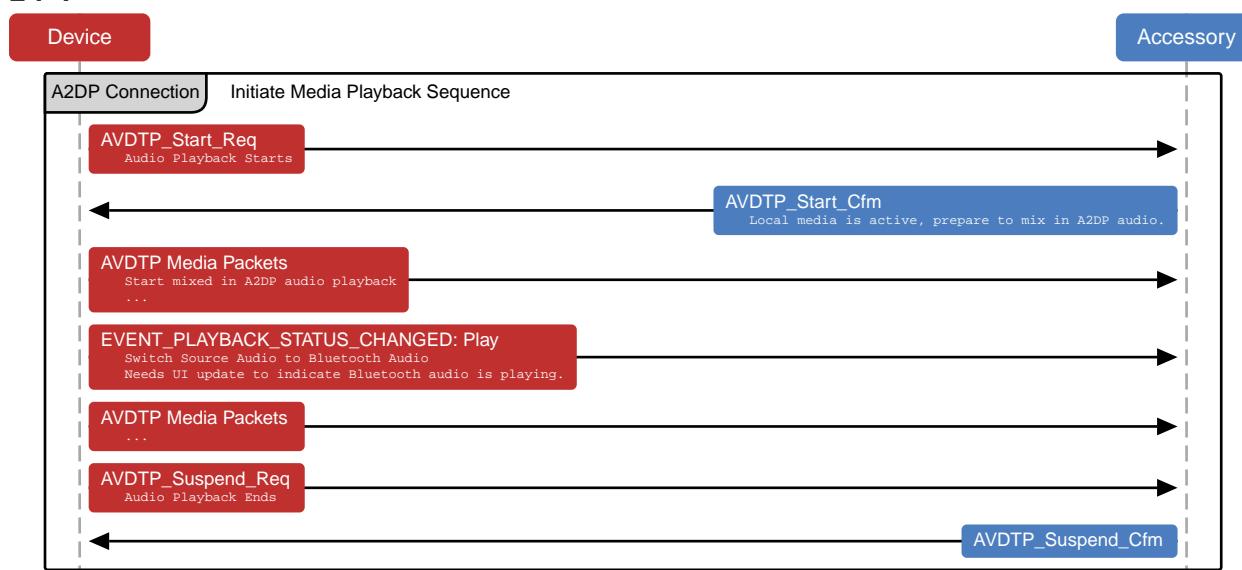

**Figure 24-2** Initiate System Sound (e.g. turn-by-turn directions)

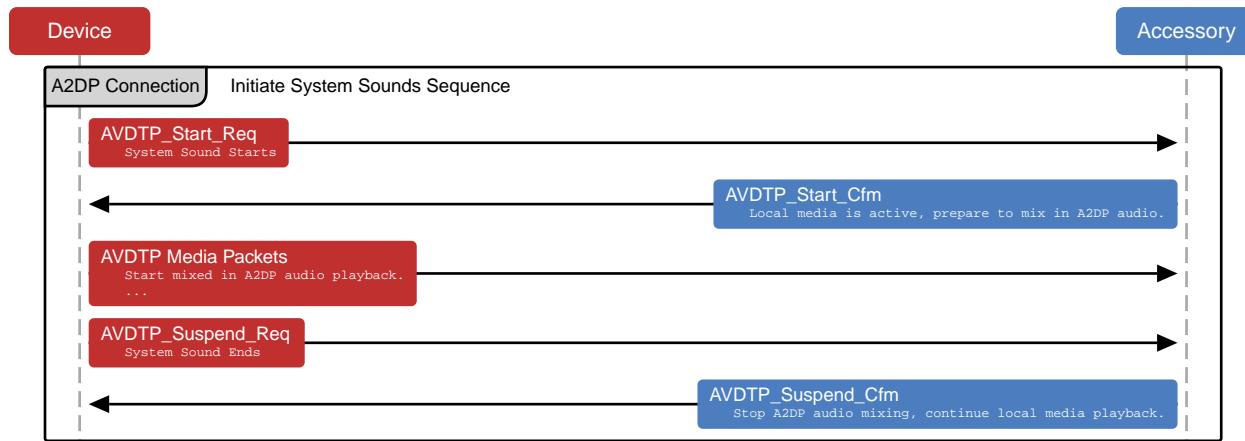

### 24.12.2.2 Expected Audio Routing Behavior for A2DP

The accessory should tune its audio routing behavior based on audio content over the A2DP channel.

If audio data contains music, then it is expected that the accessory speakers are dedicated to audio data coming via the Bluetooth link and any other audio playback is paused. If audio data contains system sound, then it is expected that the accessory can render audio as desired. If the accessory is playing audio from a different source, then system sound data can be mixed with the existing track for playback; it is not necessary to pause existing audio playback on the device.

## 24.13 HID

When implementing HID over Bluetooth, the accessory:

- Should support Bluetooth HID Profile 1.1.
- Should support [Sniff Mode for Low Power Consumption](#) (page 98).
- Should use the following parameters in SDP for sniff subrating:
  - HIDSSRHostMaxLatency - 450 ms (720 slots)
  - HIDSSRHostMinTimeout - 45 ms (72 slots)
- Should use a typical report packet of 22 bytes or less. This is small enough to fit into a DH1 packet with L2CAP and HID header.

# 25. Bluetooth Low Energy (BLE)

The *Bluetooth 4.0* specification introduces Bluetooth Low Energy (BLE), a wireless technology targeted for accessories with limited battery resources. If Bluetooth Low Energy is supported, the accessory should follow the guidelines in this section.

## 25.1 Role

The accessory should implement either the Peripheral role as defined in the *Bluetooth 4.0* specification, Volume 3, Part C, Section 2.2.2.3 or the Broadcaster role, as defined in Section 2.2.2.1.

## 25.2 Advertising Channels

The accessory should advertise on all three advertising channels (37, 38, and 39) at each advertising event. See the *Bluetooth 4.0* specification, Volume 6, Part B, Section 4.4.2.1.

## 25.3 Advertising PDU

The accessory should use one of the following advertising PDUs:

- ADV\_IND
- ADV\_NOCONN\_IND
- ADV\_SCAN\_IND

ADV\_DIRECT\_IND should not be used. See the *Bluetooth 4.0* specification, Volume 6, Part B, Section 2.3.1.

## 25.4 Advertising Data

The advertising data sent by the accessory should contain at least the following information as described in the *Bluetooth Core Specification Supplement*, Part A:

- Flags

- TX Power Level
- Local Name
- Services

The Local Name should match the accessory's markings and packaging and not contain ':' or ';'.

The accessory may put the Local Name and the TX Power Level data in the SCAN\_RSP PDU if, for example, it needs to reduce power consumption or not all of the advertising data fit into the advertising PDU. Note that, depending on its state, the device may not always perform active scanning.

The primary services should always be advertised in the advertising PDU. Secondary services should not be advertised. Services not significant to the primary use case of the accessory may be omitted if space is limited in the Advertising PDU.

The advertising data and the scan response data in the SCAN\_RSP PDU should comply with the formatting guidelines in the *Bluetooth 4.0* specification, Volume 3, Part C, Section 18: it starts with a length field, followed by AD Type and AD Data.

## 25.5 Advertising Interval

The accessory should first use the recommended advertising interval of 20 ms for at least 30 seconds.

If it is not discovered within the initial 30 seconds, Apple recommends using one of the following longer intervals to increase chances of discovery by the device:

- 152.5 ms
- 211.25 ms
- 318.75 ms
- 417.5 ms
- 546.25 ms
- 760 ms
- 852.5 ms
- 1022.5 ms
- 1285 ms

---

**Note:** Longer advertising intervals usually result in longer discovery and connect times, but may lower accessory power consumption.

---

## 25.6 Connection Parameters

The accessory is responsible for the connection parameters used for the Low Energy connection. The accessory should request connection parameters appropriate for its use case by sending an L2CAP Connection Parameter Update Request at the appropriate time. See the *Bluetooth 4.0* specification, Volume 3, Part A, Section 4.20 for details.

The connection parameter request may be rejected if it does not comply with all of these rules:

- Slave Latency  $\leq 30$
- $2 \text{ seconds} \leq \text{connSupervisionTimeout} \leq 6 \text{ seconds}$
- Interval Min modulo 15 ms == 0
- Interval Min  $\geq 15 \text{ ms}$
- One of the following:
  - Interval Min + 15 ms  $\leq$  Interval Max
  - Interval Min == Interval Max == 15 ms
- Interval Max \* (Slave Latency + 1)  $\leq 2 \text{ seconds}$
- Interval Max \* (Slave Latency + 1) \* 3 < connSupervisionTimeout

Note that if an accessory requests Interval Min == Interval Max == 15 ms, some devices will scale the interval to 30 ms to balance power and performance constraints.


If Bluetooth Low Energy HID is one of the connected services of an accessory, connection interval down to 11.25 ms may be accepted by the device.

The device will not read or use the parameters in the Peripheral Preferred Connection Parameters characteristic. See the *Bluetooth 4.0* specification, Volume 3, Part C, Section 12.5.

## 25.7 Data Packet Length Extension

Data Packet Length Extension is an enhancement introduced in the *Bluetooth 4.2* specification which increases the maximum data length from 27 to 251. Using a longer per-packet data length improves radio efficiency, greatly increases application data rates, and boosts battery life. See the *Bluetooth 5.0* specification, Volume 6, Part B, Section 4.6.6 for details.

**Figure 25-1** Data Packet Length Extension

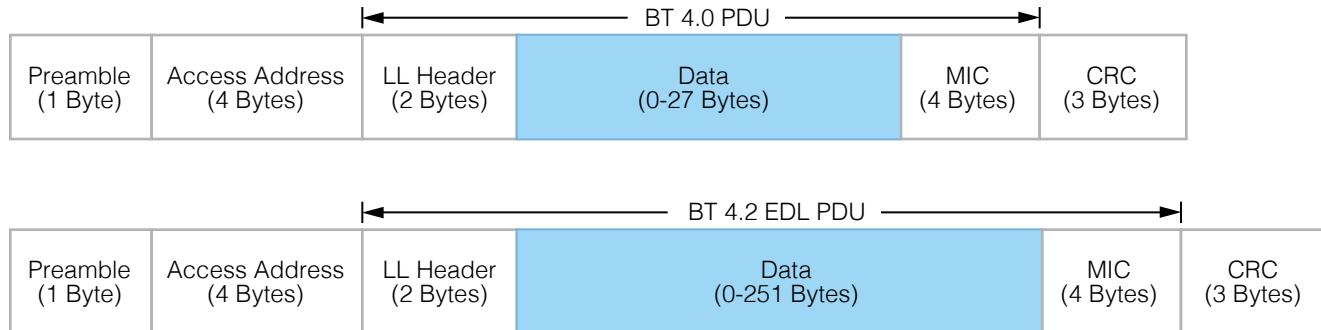

Accessories should support Data Packet Length Extension for best performance with devices.

iOS devices and Mac computers operating as master will negotiate optimal data packet lengths based on various factors, such as connection event length, system topology, and protocol.

## 25.8 Privacy

The accessory should be able to resolve a Resolvable Private Address in all situations. Due to privacy concerns, the device will use a Random Device Address as defined in the *Bluetooth 4.0* specification, Volume 3, Part C, Section 10.8.

## 25.9 Permissions

The accessory should not require special permissions, such as pairing, authentication, or encryption to discover services and characteristics. It may require special permissions only for access to a characteristic value or a descriptor value. See the *Bluetooth 4.0* specification, Volume 3, Part G, Section 8.1, fifth paragraph.

## 25.10 Pairing

The accessory should not request pairing until an ATT request is rejected using the Insufficient Authentication error code. See the *Bluetooth 4.0* specification, Volume 3, Part F, Section 4 for details.

If, for security reasons, the accessory requires a bonded relationship with the Central, the Peripheral should reject the ATT request using the Insufficient Authentication error code, as appropriate. As a result, the device may proceed with the necessary security procedures.

Similarly, if the device acts as a Central and a GATT server, it may reject an ATT request using the Insufficient Authentication error code. The accessory should initiate the security procedure for pairing in response.

Pairing may require user authorization depending on device. Once an accessory is paired with a device, it must retain the distributed keys of both central and peripheral for future use. If the pairing is no longer required, the accessory must delete both sets of keys.

## 25.11 MTU Size

An accessory that supports packet length extension must perform the packet length update procedure before performing the Exchange MTU Request handshake, see [Data Packet Length Extension](#) (page 113).

Devices will support and request an MTU size larger than the default during the Exchange MTU Request handshake. See the *Bluetooth 4.0* specification, Volume 3, Part F, Section 3.2.8.

When operating as ATT client, the device will request the optimal MTU size based on factors such as the Bluetooth topology, connection event length, maximum data length, and protocol (GATT or connection-oriented L2CAP).

An accessory operating as ATT server should select an MTU that is equal to or greater than the device's MTU request.

## 25.12 Services

### 25.12.1 Generic Access Profile Service

The accessory should implement the Device Name characteristic per the *Bluetooth 4.0* specification, Volume 3, Part C, Section 12.1. The Device Name characteristic should be writeable.

### 25.12.2 Generic Attribute Profile Service

The accessory must implement the Service Changed characteristic only if the accessory has the ability to change its services during its lifetime.

The device may use the Service Changed characteristic to determine if it can rely on previously read (cached) information from the device. See the *Bluetooth 4.0* specification, Volume 3, Part G, Section 7.1.

### 25.12.3 Device Information Service

The accessory must implement the Device Information Service. The service UUID for this service should not be advertised in the Advertising Data. The following characteristics should be supported:

- Manufacturer Name String
- Model Number String
- Firmware Revision String
- Software Revision String

### 25.12.4 Available Services

With iOS 7.0, any device makes Battery Service, Current Time Service and Apple Notification Center Service (ANCS) available to an accessory. The Current Time Service supports the current time and local time information characteristics. The service does not provide an "Adjust Reason" when the current time changes. ANCS uses 7905F431-B5CE-4E99-A40F-4B1E122D00D0 as its UUID.

These services are not guaranteed to be available immediately after connection and the accessory must support Characteristic Value Indication of the Service Changed characteristic (see *Bluetooth 4.0* specification, Volume 3, Part G, Section 7.1) to be notified when the services become available. The device will maintain a connection to an accessory as long as it is paired and uses one of the available services.

## 25.13 GATT Server

With iOS 6.0, applications may contribute services and characteristics to the GATT server that the device makes available to the accessory. The recommendations in this section apply to the accessory in this case.

The following services are implemented internally by iOS and must not be published by third party iOS applications:

- Generic Attribute Profile Service
- Generic Access Profile Service
- Bluetooth Low Energy HID Service
- Battery Service
- Current Time Service
- Apple Notification Center Service

The device implements the GAP Service Changed characteristic, because the database contents can change at any time. The accessory should therefore support the Characteristic Value Indication of this characteristic and, upon receiving indications, invalidate its database cache accordingly. See the *Bluetooth 4.0* specification, Volume 3, Part G, Section 7.1.

The accessory should minimize the use of ATT/GATT requests and commands and only send what is necessary. For example, do not use GATT Discover All Services when the accessory is looking for specific services. Use Discover Primary Service By Service UUID instead. Less airtime equals less power consumption and better performance for both the accessory and the device.

When third party iOS applications discover services on the accessory, the following services are used internally by iOS and are filtered out from the list of discovered services:

- Generic Attribute Profile Service
- Generic Access Profile Service
- Bluetooth Low Energy HID Service
- Apple Notification Center Service

The accessory should be robust enough to handle any error gracefully. Pairing and Characteristic Value reads/writes may fail if the application that owns the service is not in the foreground and is not entitled to run in the background.

If an ATT Prepare Write Request is used, all queued attributes are contained within the same GATT Service.

# Connectors

# 26. USB-A Receptacle

Accessories may incorporate a USB-A receptacle to:

- Provide power to a device.

## 26.1 Mechanical

The USB-A receptacle must meet or exceed all applicable USB-IF mechanical specifications.

## 26.2 Electrical

The USB-A receptacle must meet or exceed all applicable USB-IF electrical specifications.

# 27. USB-C Plug

Accessories may incorporate a USB-C plug to:

- Draw power from Apple branded or MFi certified USB power sources.
- Draw power from USB-C Current sources.
- Draw power from USB Power Delivery sources.
- Draw power from USB Dedicated Charging Ports and USB hosts, such as a Mac.
- Enable USB connection to a Mac.

Examples of accessories that may benefit from including a USB-C plug include cables, battery packs, and adapters.

## 27.1 Mechanical

The USB-C plug must have an assigned *Connector Test ID* from the USB-IF.

## 27.2 Electrical

Accessories must not directly electrically connect a USB-C plug to the device.

Accessories that draw power from the USB-C plug must:

- Correctly identify all Apple branded or MFi certified USB power sources that connect resistor networks to USB D+ and USB D-, see [Identifying Power Source Current Limit](#) (page 88).
- Correctly identify all USB Dedicated Charging Ports (DCP) as defined in the *USB Battery Charging* 1.2 specification.
- Correctly identify all USB-C Current sources, see [USB-C Current](#) (page 91).
- Enumerate as a USB device when connected to a USB host, such as a Mac, and:
  - Not draw more than 100 mA of current until they have been successfully enumerated.
  - Request no more than 500 mA of charging current in their USB device descriptor.
- Not draw more power than the USB power source claims it is capable of providing via one of the above methods.

Accessories may also correctly identify all USB Power Delivery (USB-PD) sources, see [USB Power Delivery](#) (page 90).

## 27.3 Test Procedures

### 27.3.1 Connector Test ID

Verify that the accessory's USB-C plug has an assigned *Connector Test ID* from the USB-IF.

### 27.3.2 Drawing Power

This procedure applies to accessories that draw power via the USB-C plug.

The following equipment is needed:

- Apple 29W USB-C Power Adapter
- Bundled USB-C power adapter (if applicable)

Verify that the accessory correctly identifies all Apple branded or bundled power sources:

1. Verify that each USB-C power adapter is correctly identified and provides power.

Verify that the accessory correctly identifies a Mac:

1. Verify that the Mac is correctly identified and provides power.

# 28. USB-C Receptacle

Accessories may incorporate a USB-C receptacle to:

- Provide power to a device.
- Draw power from Apple branded or MFi certified USB power sources.
- Draw power from USB-C Current sources.
- Draw power from USB Power Delivery sources.
- Draw power from USB Dedicated Charging Ports and USB hosts, such as a Mac.
- Enable USB connection to a Mac.

Accessories must not integrate a USB-C receptacle to enable passthrough USB charge/sync of a device.

Examples of accessories that may benefit from including a USB-C receptacle include [AC Power Adapters](#) (page 49), [Battery Packs](#) (page 53), and speakers.

## 28.1 Mechanical

The USB-C receptacle must be USB-IF certified and have a *Connector Test ID* from the USB-IF.

## 28.2 Electrical

Accessories must not directly electrically connect a USB-C receptacle to the device.

### 28.2.1 Drawing Power

Accessories that draw power from the USB-C receptacle must:

- Correctly identify all Apple branded or MFi certified USB power sources that connect resistor networks to USB D+ and USB D-, see [Identifying Power Source Current Limit](#) (page 88).
- Correctly identify all USB Dedicated Charging Ports (DCP) as defined in the *USB Battery Charging 1.2 specification*.
- Correctly identify all USB-C Current sources, see [USB-C Current](#) (page 91).
- Enumerate as a USB device when connected to a USB host, such as a Mac, and:
  - Not draw more than 100 mA of current until they have been successfully enumerated.

- Request no more than 500 mA of charging current in their USB device descriptor.
- Not draw more power than the USB power source claims it is capable of providing via one of the above methods.

Accessories may also correctly identify all USB Power Delivery (USB-PD) sources, see [USB Power Delivery](#) (page 90).

## 28.2.2 Providing Power

Accessories that provide power to a device via a USB-C receptacle:

- Must support [USB-C Current](#) (page 91).
- Should support [USB Power Delivery](#) (page 90).
- Should label the receptacle indicating how much power is supplied in watts.

## 28.3 Test Procedures

### 28.3.1 Connector Test ID

Verify that the accessory's USB-C receptacle has an assigned *Connector Test ID* from the USB-IF.

### 28.3.2 Drawing Power

This procedure applies to accessories that draw power via the USB-C receptacle.

The following equipment is needed:

- Apple USB-C Charge Cable (1 m)
- Apple USB-C Charge Cable (2 m)
- Bundled USB-C to USB-C cable (if applicable)
- Bundled USB-A to USB-C cable (if applicable)
- 3rd-party USB-A to USB-C cable
- Apple 5W USB Power Adapter
- Apple 10W USB Power Adapter
- Apple 18W USB Power Adapter
- Apple 12W USB Power Adapter
- Apple 29W USB-C Power Adapter
- Apple 30W USB-C Power Adapter
- Bundled USB-C power adapter (if applicable)
- Bundled USB-A power adapter (if applicable)

## 28. USB-C Receptacle

### 28.3 Test Procedures

- MFi USB-C power adapter(s)
- MFi USB-A power adapter(s)

Verify that the accessory correctly identifies all Apple branded or bundled power adapters:

1. Using each USB-A to USB-C cable, verify that each USB-A power adapter is correctly identified and provides power.
2. Using each USB-C to USB-C cable, verify that each USB-C power adapter is correctly identified and provides power.

Verify that the accessory correctly identifies a Mac:

1. Using each USB-A to USB-C cable and USB-C to USB-C cable, verify that the Mac is correctly identified and provides power.

Verify that the accessory correctly identifies MFi power adapters:

1. Using each USB-A to USB-C cable, verify that each MFi USB-A power adapter is correctly identified and provides power.
2. Using each USB-C to USB-C cable, verify that each MFi USB-C power adapter is correctly identified and provides power.

### 28.3.3 Providing Power

This procedure applies to accessories that provide power via the USB-C receptacle.

The following equipment is needed:

- Apple USB-C to Lightning Cable (1 m)
- Apple USB-C to Lightning Cable (2 m)
- Apple USB-C Charge Cable (1 m)
- Apple USB-C Charge Cable (2 m)
- Bundled USB-C to USB-C cable (if applicable)

Verify that the accessory correctly provides power to devices:

1. Using each USB-C to Lightning cable, verify that the accessory uses USB-C Current or USB-PD to identify at least 15 W of power providing capability.
2. Using each USB-C to Lightning cable, verify that the accessory provides power to the device.

Verify that the accessory correctly identifies a Mac:

1. Using each USB-C to USB-C cable, verify that the accessory is correctly identified and provides power to the Mac.

# References

# 29. Device Dimensional Drawings

This chapter contains the following dimensional drawings:

- [iPhone 11 Pro Max](#) (page 129)
- [iPhone 11 Pro](#) (page 130)
- [iPhone 11](#) (page 131)
- [iPhone XS Max](#) (page 132)
- [iPhone XS](#) (page 133)
- [iPhone XR](#) (page 134)
- [iPhone X](#) (page 135)
- [iPhone 8 Plus](#) (page 136)
- [iPhone 8](#) (page 137)
- [iPhone 7 Plus](#) (page 138)
- [iPhone 7](#) (page 139)
- [iPhone 6s Plus](#) (page 140)
- [iPhone 6s](#) (page 141)
- [iPhone 6 Plus](#) (page 142)
- [iPhone 6](#) (page 143)
- [iPhone 5s & iPhone SE](#) (page 144)
- [iPhone 5c](#) (page 145)
- [iPhone 5](#) (page 146)
- [iPad \(7th generation\) 1 of 3](#) (page 147)
- [iPad \(7th generation\) 2 of 3](#) (page 148)
- [iPad \(7th generation\) 3 of 3](#) (page 149)
- [iPad Air \(3rd generation\) with Wi-Fi 1 of 3](#) (page 150)
- [iPad Air \(3rd generation\) with Wi-Fi 2 of 3](#) (page 151)
- [iPad Air \(3rd generation\) with Wi-Fi 3 of 3](#) (page 152)
- [iPad Air \(3rd generation\) with Wi-Fi + Cellular 1 of 3](#) (page 153)
- [iPad Air \(3rd generation\) with Wi-Fi + Cellular 2 of 3](#) (page 154)
- [iPad Air \(3rd generation\) with Wi-Fi + Cellular 3 of 3](#) (page 155)
- [iPad mini \(5th generation\) with Wi-Fi 1 of 3](#) (page 156)
- [iPad mini \(5th generation\) with Wi-Fi 2 of 3](#) (page 157)
- [iPad mini \(5th generation\) with Wi-Fi 3 of 3](#) (page 158)
- [iPad mini \(5th generation\) with Wi-Fi + Cellular 1 of 3](#) (page 159)
- [iPad mini \(5th generation\) with Wi-Fi + Cellular 2 of 3](#) (page 160)

- iPad mini (5th generation) with Wi-Fi + Cellular 3 of 3 (page 161)
- iPad Pro (12.9-inch) 3rd Generation 1 of 3 (page 162)
- iPad Pro (12.9-inch) 3rd Generation 2 of 3 (page 163)
- iPad Pro (12.9-inch) 3rd Generation 3 of 3 (page 164)
- iPad Pro (11-inch) 1 of 3 (page 165)
- iPad Pro (11-inch) 2 of 3 (page 166)
- iPad Pro (11-inch) 3 of 3 (page 167)
- iPad Pro (12.9-inch) 2nd Generation with Wi-Fi (page 168)
- iPad Pro (12.9-inch) 2nd Generation with Wi-Fi + Cellular (page 169)
- iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 1 of 2 (page 170)
- iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 2 of 2 (page 171)
- iPad Pro (10.5-inch) with Wi-Fi (page 172)
- iPad Pro (10.5-inch) with Wi-Fi + Cellular (page 173)
- iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 1 of 2 (page 174)
- iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 2 of 2 (page 175)
- iPad (5th and 6th generation) with Wi-Fi + Cellular (page 176)
- iPad (5th and 6th generation) Magnet/Hall Effect Sensors 1 of 2 (page 177)
- iPad (5th and 6th generation) Magnet/Hall Effect Sensors 2 of 2 (page 178)
- iPad Pro (9.7-inch) with Wi-Fi (page 179)
- iPad Pro (9.7-inch) with Wi-Fi + Cellular (page 180)
- iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 1 of 2 (page 181)
- iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 2 of 2 (page 182)
- iPad Pro (12.9-inch) 1st Generation with Wi-Fi (page 183)
- iPad Pro (12.9-inch) 1st Generation with Wi-Fi + Cellular (page 184)
- iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 1 of 2 (page 185)
- iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 2 of 2 (page 186)
- iPad mini 4 with Wi-Fi (page 187)
- iPad mini 4 with Wi-Fi + Cellular (page 188)
- iPad mini 4 Magnet/Hall Effect Sensors (page 189)
- iPad Air 2 with Wi-Fi (page 190)
- iPad Air 2 with Wi-Fi + Cellular (page 191)
- iPad mini 2 & iPad mini 3 with Wi-Fi (page 192)
- iPad mini 2 & iPad mini 3 with Wi-Fi + Cellular (page 193)
- iPad Air with Wi-Fi (page 194)
- iPad Air with Wi-Fi + Cellular (page 195)
- iPad mini with Wi-Fi (page 196)
- iPad mini with Wi-Fi + Cellular (page 197)
- iPad (4th generation) with Wi-Fi (page 198)
- iPad (4th generation) with Wi-Fi + Cellular (page 199)
- iPod touch (6th generation) & iPod touch (7th generation) (page 200)

- [iPod touch \(5th generation\) \(page 201\)](#)
- [Apple Watch Series 5, 44 mm \(page 202\)](#)
- [Apple Watch Series 5, 40 mm \(page 203\)](#)
- [Apple Watch Series 5 Ceramic, 44 mm \(page 204\)](#)
- [Apple Watch Series 5 Ceramic, 40 mm \(page 205\)](#)
- [Apple Watch Series 4, 44 mm \(page 206\)](#)
- [Apple Watch Series 4, 40 mm \(page 207\)](#)
- [Apple Watch Series 3 Ceramic, 42 mm \(page 208\)](#)
- [Apple Watch Series 3 Ceramic, 38 mm \(page 209\)](#)
- [Apple Watch Series 3 Metal, 42 mm \(page 210\)](#)
- [Apple Watch Series 3 Metal, 38 mm \(page 211\)](#)
- [Apple Watch Series 2 Ceramic, 42 mm \(page 212\)](#)
- [Apple Watch Series 2 Ceramic, 38 mm \(page 213\)](#)
- [Apple Watch Series 2 Metal, 42 mm \(page 214\)](#)
- [Apple Watch Series 2 Metal, 38 mm \(page 215\)](#)
- [Apple Watch \(1st generation\) & Apple Watch Series 1, 42 mm \(page 216\)](#)
- [Apple Watch \(1st generation\) & Apple Watch Series 1, 38 mm \(page 217\)](#)
- [AirPods Pro Wireless Charging Case \(page 218\)](#)
- [AirPods Wireless Charging Case \(page 219\)](#)
- [AirPods \(page 220\)](#)

# 29.1 iPhone 11 Pro Max

**NOTES:** UNLESS OTHERWISE SPECIFIED

- [1] NO METAL CONTACT WITH IPHONE.
- [2] DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER AND SPEAKER.
- [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERAS, REAR FLASH.
- [4] DO NOT OBSTRUCT FORWARD FACING SENSORS.
- [5] RELATIVE MAGNETIC PERMEABILITY OF ANY METAL USED ON CASE: 1.05 MAX, PER ASTM A342/A342M-14.
- [6] DO NOT TOUCH GLASS.
- [7] DO NOT OBSTRUCT PORTS.
- [8] NO HIGH POWERED MAGNETS.
- [9] CASE THICKNESS ON BACKSIDE OF PRODUCT: 5.0 mm MAX TO ENSURE FULL FUNCTIONALITY.

**D**

**C**

**CORNER PROFILE (ALL FOUR CORNERS)**

**B**

**DETAIL C**

**PROFILE (ALL SIDES)**

**A**

**DETAIL B**

**FRONT**

**D**

**SECTION F-F**

**SECTION G-G**

**SECTION H-H**

**SECTION I-I**

**SECTION J-J**

**SECTION K-K**

**SECTION L-L**

**SECTION M-M**

**SECTION N-N**

**SECTION O-O**

**SECTION P-P**

**SECTION Q-Q**

**SECTION R-R**

**SECTION S-S**

**SECTION T-T**

**SECTION U-U**

**SECTION V-V**

**SECTION W-W**

**SECTION X-X**

**SECTION Y-Y**

**SECTION Z-Z**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**

**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

**SECTION AA-AA**

**SECTION BB-BB**

**SECTION CC-CC**

**SECTION DD-DD**

**SECTION EE-EE**

**SECTION FF-FF**

**SECTION GG-GG**

**SECTION HH-HH**

**SECTION II-II**

**SECTION JJ-JJ**

**SECTION KK-KK**

**SECTION LL-LL**

**SECTION MM-MM**

**SECTION NN-NN**

**SECTION OO-OO**

**SECTION PP-PP**

**SECTION QQ-QQ**

**SECTION RR-RR**

**SECTION SS-SS**

**SECTION TT-TT**

**SECTION UU-UU**

**SECTION VV-VV**

**SECTION WW-WW**


**SECTION XX-XX**

**SECTION YY-YY**

**SECTION ZZ-ZZ**

<img alt="A

# 29.2 iPhone 11 Pro

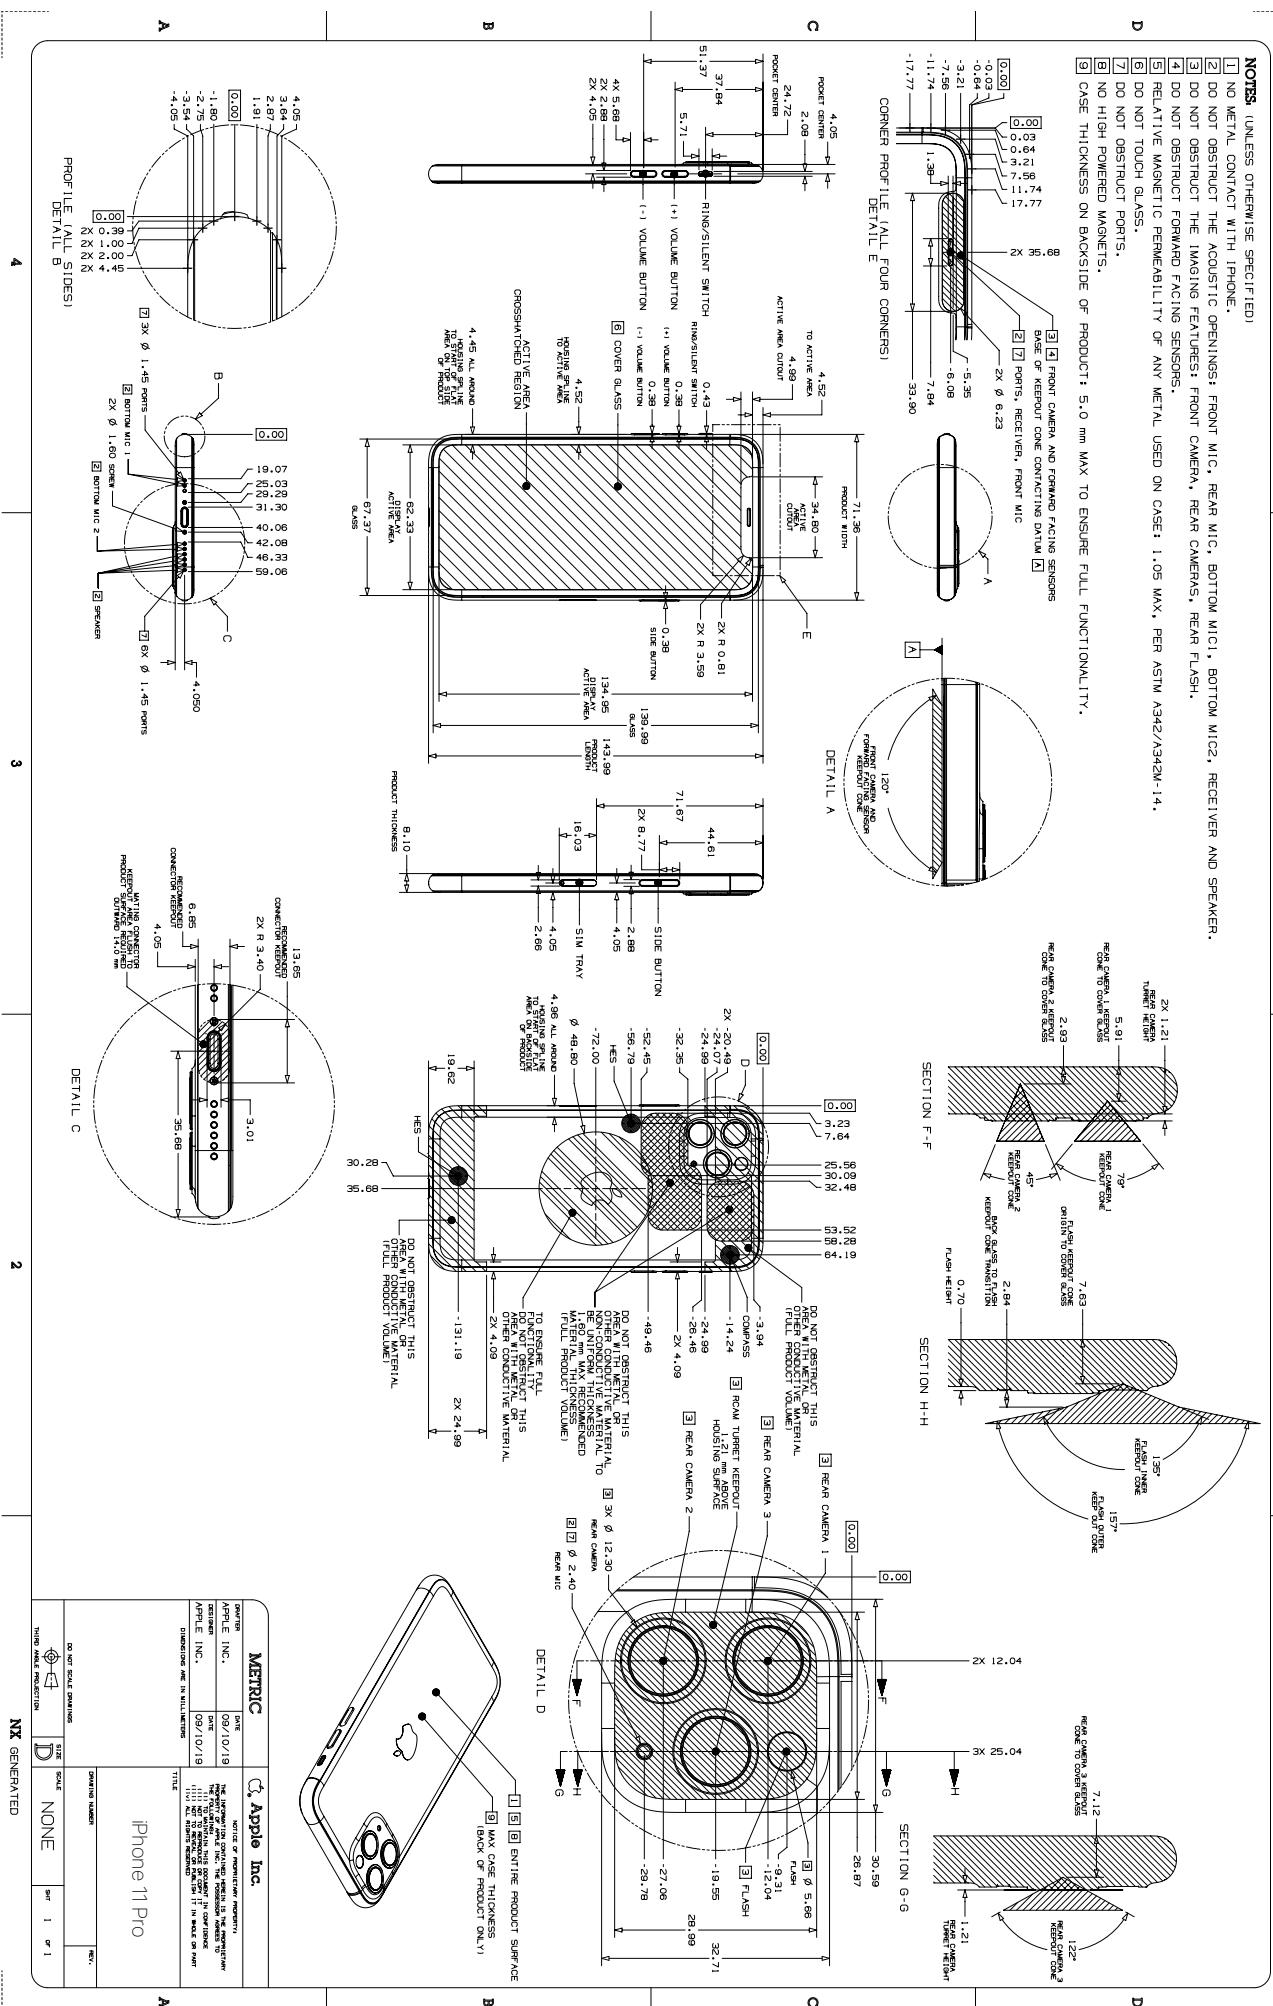


## NOTES:

- [1] DO NOT METAL CONTACT WITH IPHONE.
  - [2] DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER AND SPEAKER.
  - [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
  - [4] DO NOT OBSTRUCT FORWARD ACTING SENSORS.
  - [5] RELATIVE MAGNETIC PERMEABILITY OF ANY METAL USED ON CASE: 1.05 MAX., PER ASTM A342/A342M-14.
  - [6] DO NOT TOUCH GLASS.
  - [7] DO NOT OBSTRUCT PORTS.
  - [8] NO HIGH POWERED MAGNETS.
  - [9] CASE THICKNESS ON BACKSIDE OF PRODUCT: 5.0 mm MAX TO ENSURE FULL FUNCTIONALITY.

63

2

1

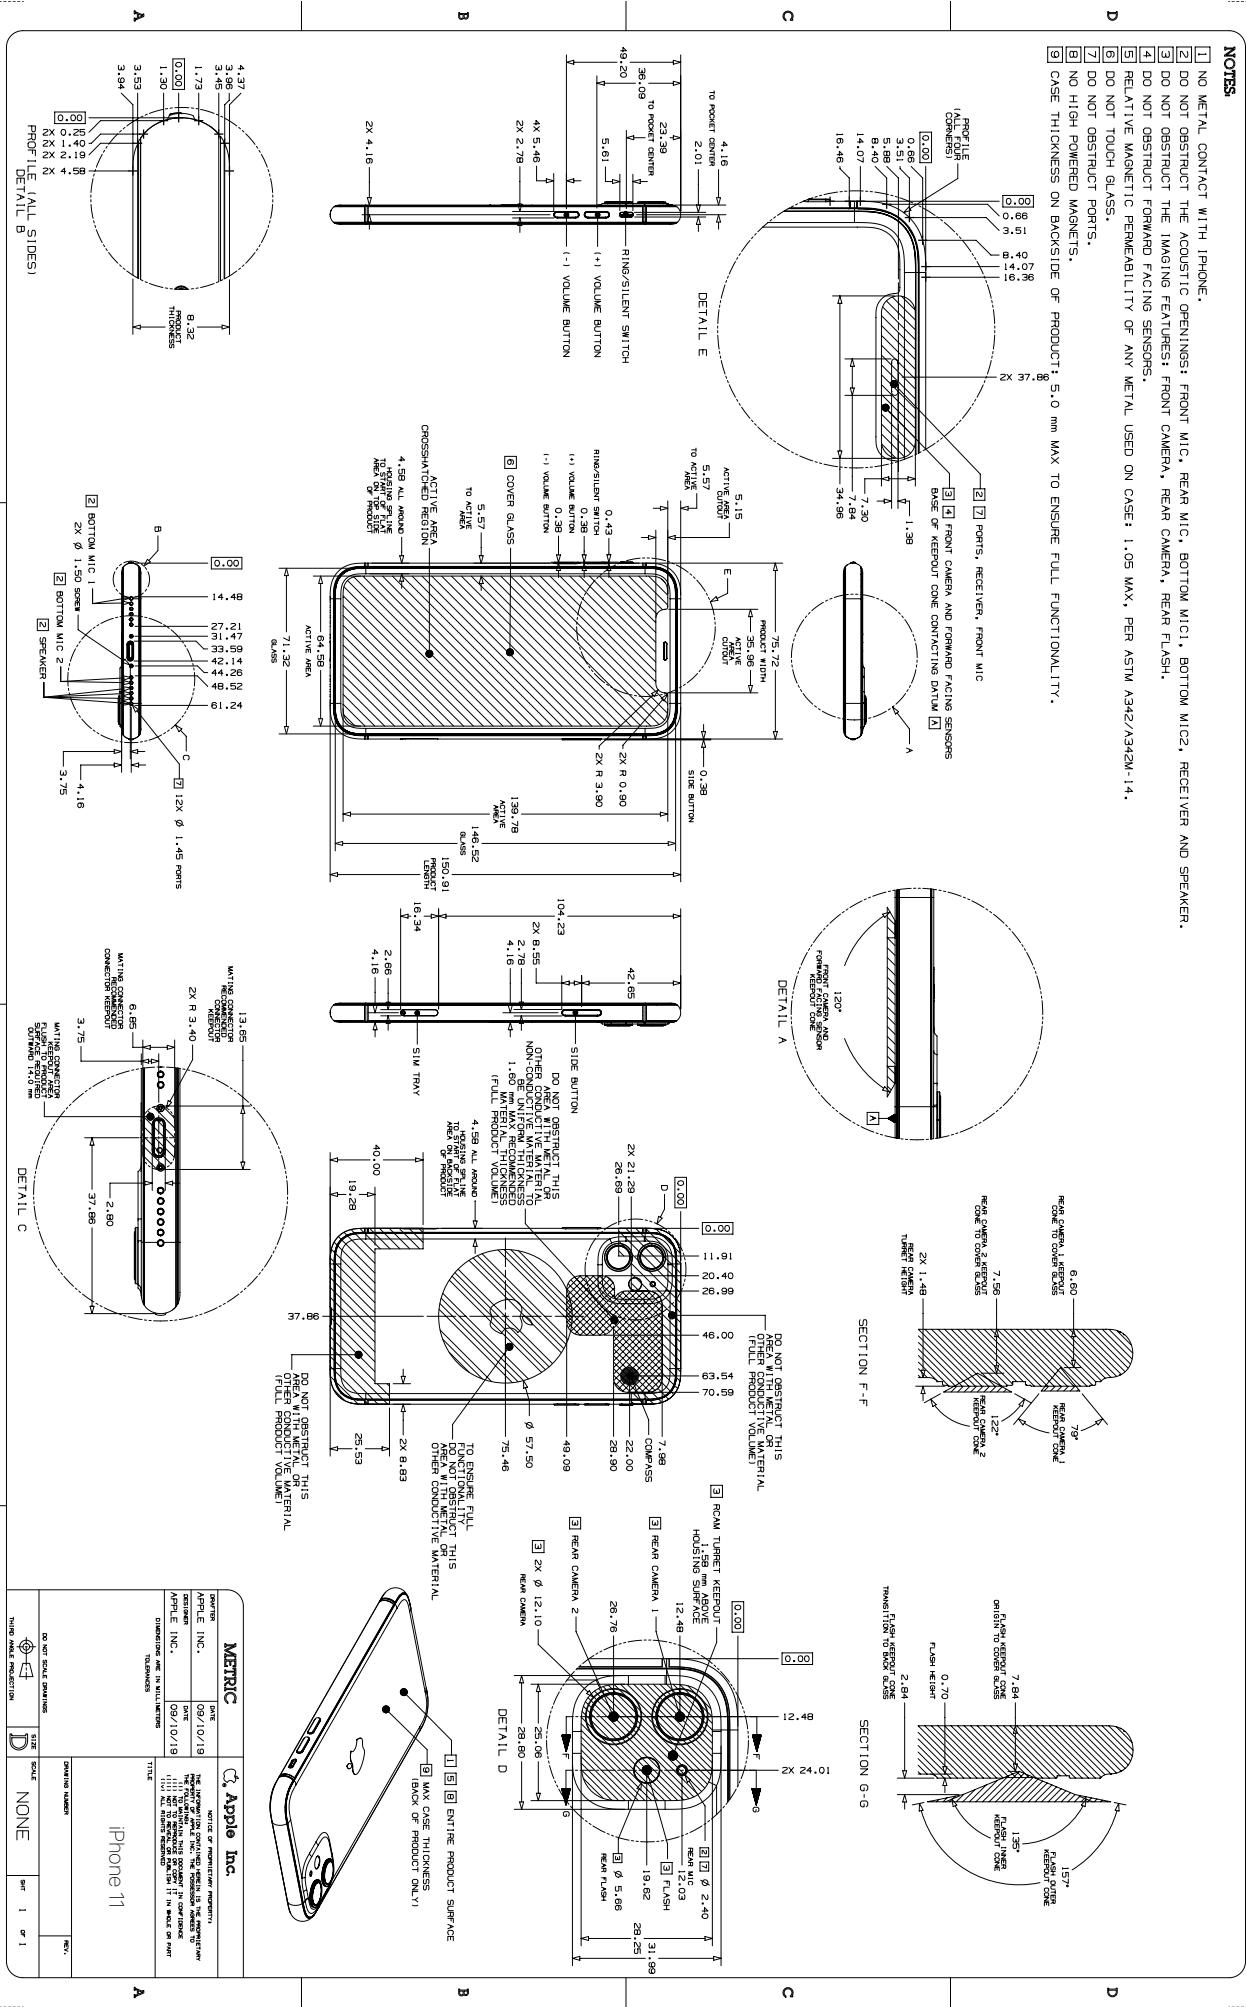

29.4 iPhone XS Max

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

1. NO METAL CONTACT WITH IPHONE.
2. DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER AND SPEAKER.
3. DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
4. DO NOT OBSTRUCT FORWARD FACING SENSORS.
5. RELATIVE MAGNETIC PERMEABILITY OF ANY METAL USED ON CASE: 1.05 MAX, PER ASTM A342/A342M-14.
6. DO NOT TOUCH GLASS.
7. DO NOT OBSTRUCT PORTS.
8. CASE THICKNESS ON BACKSIDE OF PRODUCT: 5.0 mm MAX TO ENSURE FULL FUNCTIONALITY.
9. CASE HIGH POWERED MAGNETS.

**DETAIL B**

**DETAIL C**

**DETAIL D**

**DETAIL E**

**DETAIL F**

**DETAIL G**

**DETAIL H**

**DETAIL I**

**DETAIL J**

**DETAIL K**

**DETAIL L**

**DETAIL M**

**DETAIL N**

**DETAIL O**

**DETAIL P**

**DETAIL Q**

**DETAIL R**

**DETAIL S**

**DETAIL T**

**DETAIL U**

**DETAIL V**

**DETAIL W**

**DETAIL X**

**DETAIL Y**


**DETAIL Z**

**Metric**

Metric	Apple Inc.
Power Type	Date 09/12/18
Apple Inc.	Notes or comments: The drawings for components used in the design of this product must be reviewed by Apple before any changes are made. All changes must be approved by Apple before implementation. All changes must be documented in the change control system. All changes must be communicated to the appropriate functional groups. All changes must be communicated to the appropriate functional groups.
Apple Inc.	Date 09/12/18
Dimensions are in millimeters	
Title	iPhone XS Max
Do Not Scale Drawings	None
Drawing Number	REV: A
Size	1:1
Scale	None

10

- 1 DO NOT CONTACT WITH IRTHOME.
  - 2 DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER AND SPEAKER.
  - 3 DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
  - 4 DO NOT OBSTRUCT FORWARD FACING SENSORS.
  - 5 RELATIVE MAGNETIC PERMEABILITY OF ANY METAL USED ON CASE: 1.05 MAX. PER ASTM A342/A342M-14.
  - 6 DO NOT TOUCH GLASS.
  - 7 DO NOT OBSTRUCT PORTS.
  - 8 NO HIGH POWERED MAGNETS.
  - 9 CASE THICKNESS ON BACK/SIDE OF PRODUCT: 5.0 mm MAX TO ENSURE FULL FUNCTIONALITY.

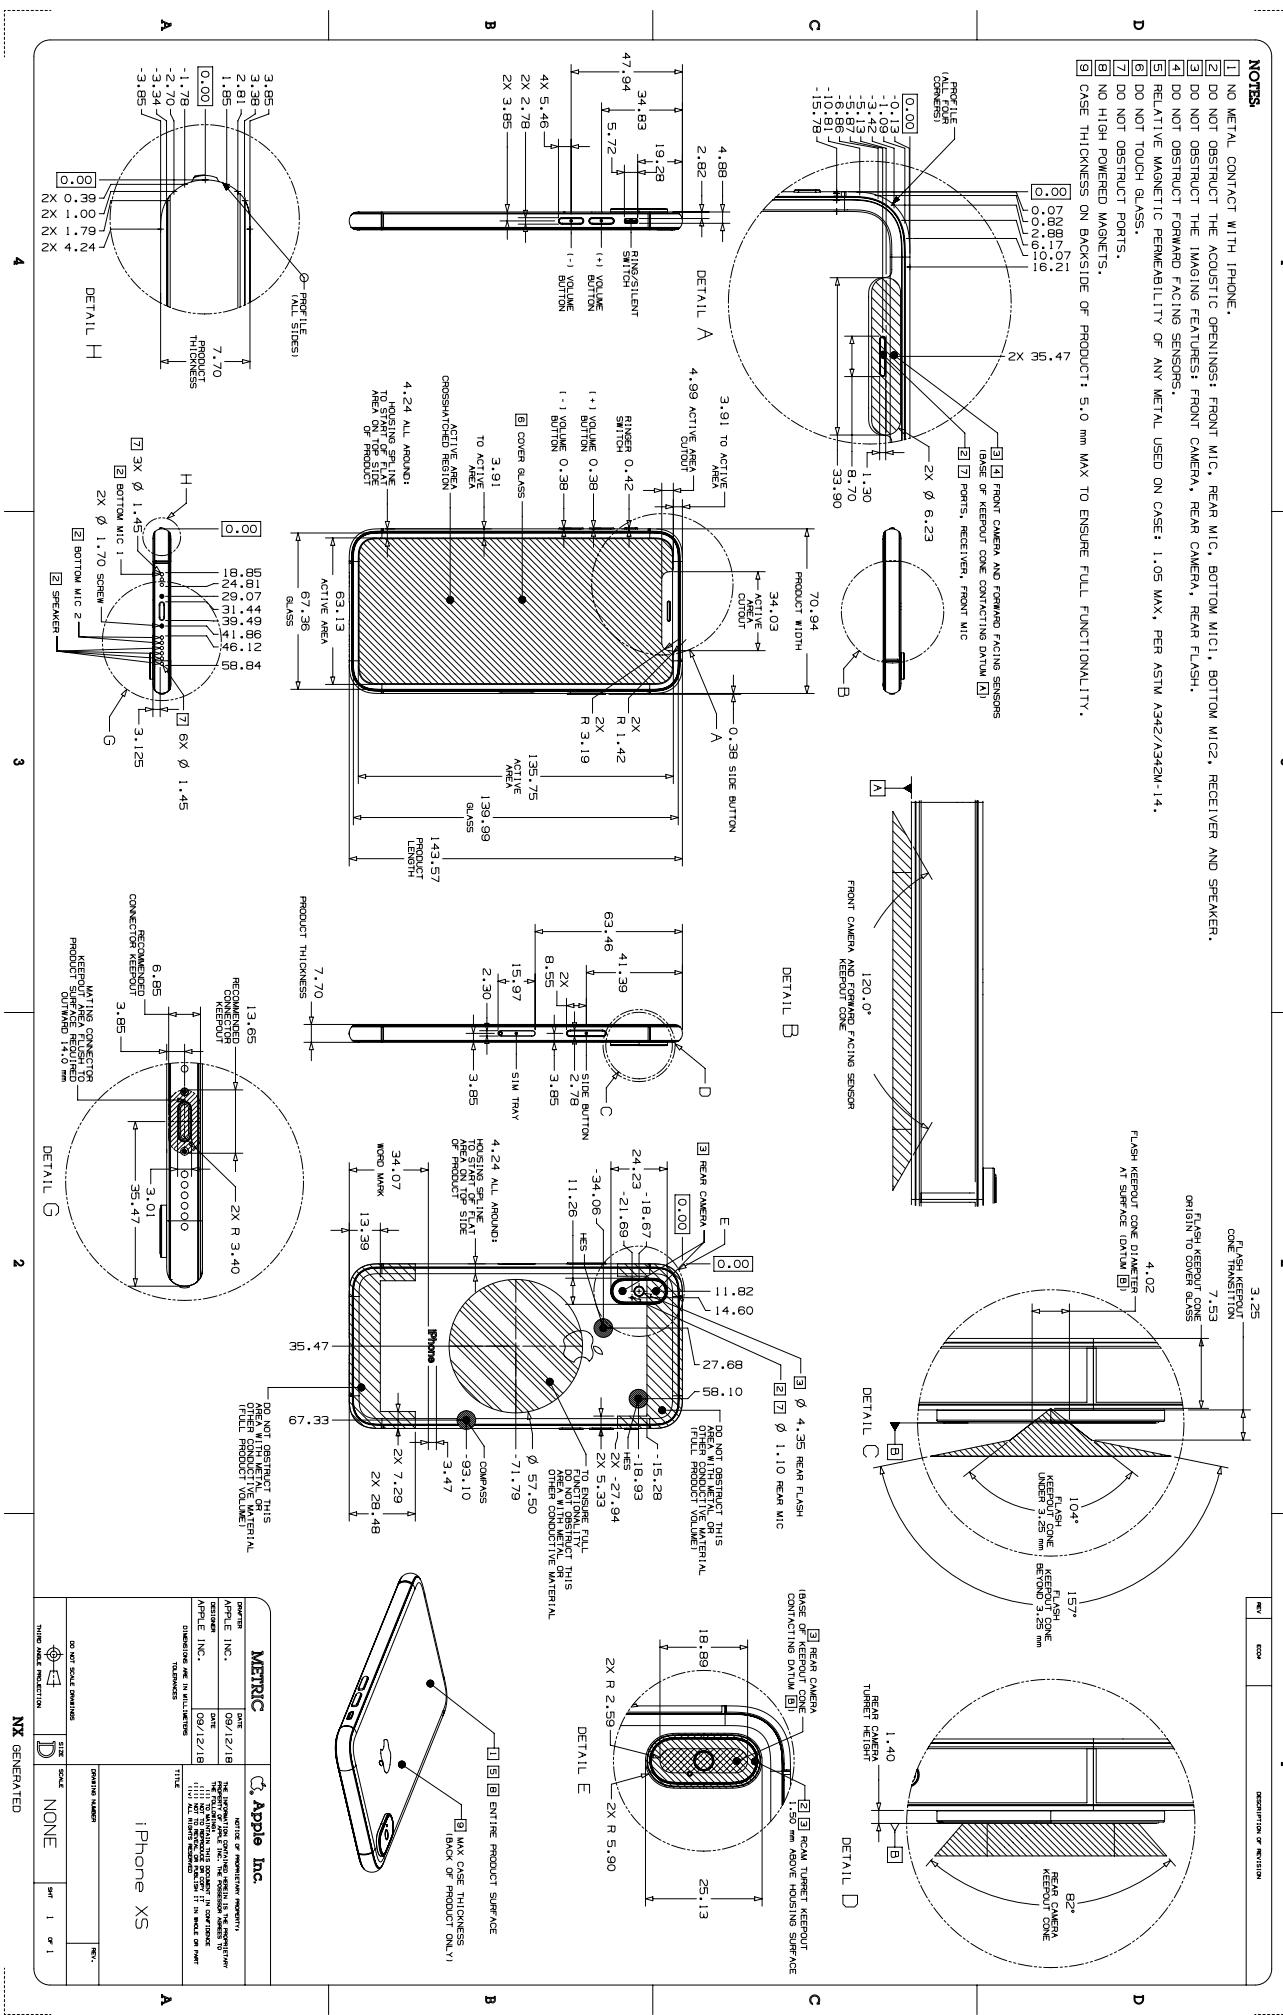





29.8 iPhone 8 Plus

**NOTES:**

- [1] NO METAL CONTACT WITH iPHONE.
- [2] DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER, AND SPEAKER.
- [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
- [4] DO NOT OBSTRUCT THE PROXIMITY SENSOR OR AMBIENT LIGHT SENSOR (ALS).
- [5] DO NOT OBSTRUCT THE HOME/TOUCH ID SENSOR.
- [6] DO NOT BLOCK GLASS.
- [7] DO NOT OBSTRUCT PORTS.
- [8] NO HIGH POWERED MAGNETS.
- [9] RELATIVE MAGNETIC PERMEABILITY OF ANY METAL USED ON CASE: 5.0 MM MAX TO ENSURE FULL FUNCTIONALITY.
- [10] CASE THICKNESS ON BACKSIDE OF PRODUCT: 5.0 mm MAX TO ENSURE FULL FUNCTIONALITY.

**DETAIL E**

**DETAIL A**

**DETAIL B**

**DETAIL C**

**DETAIL D**

**DETAIL F**

**METRIC**

Apple Inc.	
Part	REV
Apple Inc., Revision C 09/12/17	09/12/17
Apple Inc., Revision D 09/12/17	09/12/17
Dimensions in millimeters	mm
Symbol	Scale
None	Part 1 of 1
0.09	0.09

**NOTE:** NO SCALE DRAWINGS

29.10 iPhone 7 Plus

# 29.11 iPhone 7

NOTES


- 1 NO METAL CONTACT WITH IPHONE.
- 2 DO NOT OBSTRUCT THE ACOUSTIC OPENINGS; FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER, AND SPEAKER.
- 3 DO NOT OBSTRUCT THE IMAGING FEATURES; FRONT CAMERA, REAR CAMERA, REAR FLASH.
- 4 DO NOT OBSTRUCT THE PROXIMITY SENSOR OR AMBIENT LIGHT SENSOR (ALS).
- 5 DO NOT OBSTRUCT THE HOME BUTTON.
- 6 DO NOT TOUCH GLASS.
- 7 DO NOT OBSTRUCT PORTS.
- 8 NO HIGH POWERED MAGNETS. ENTIRE PRODUCT SURFACE.

4

3

2

1

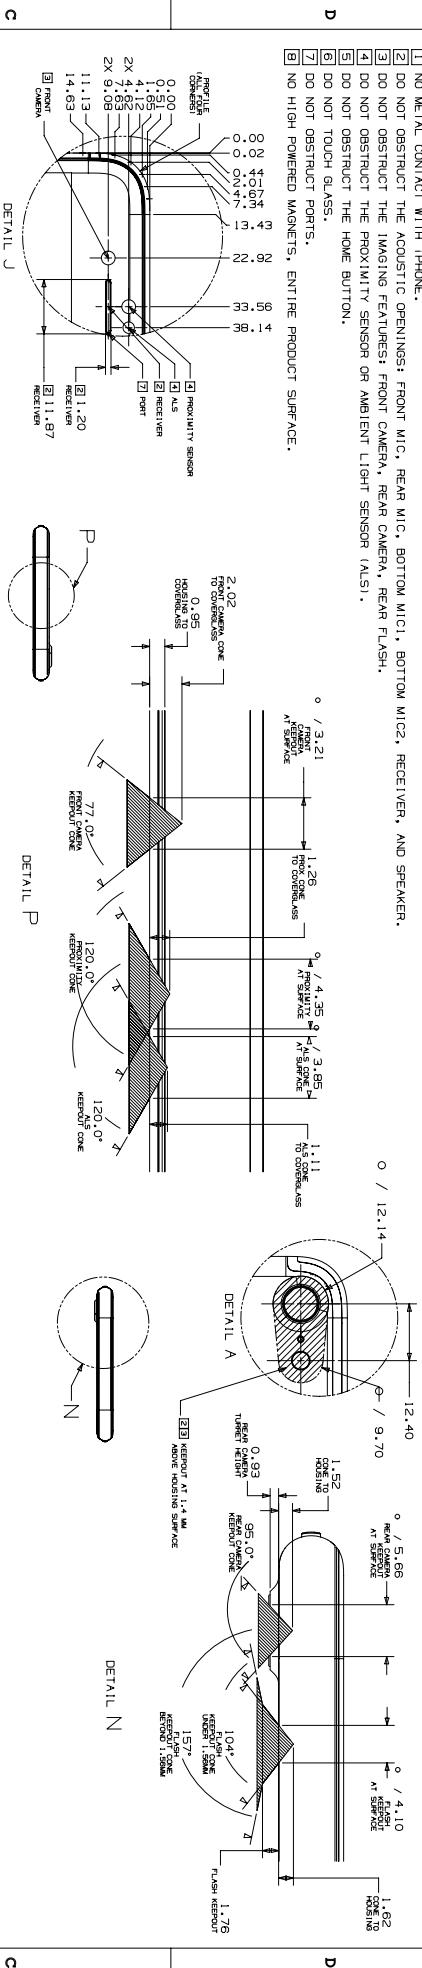

C

N

C

D


D

P

J

B

A

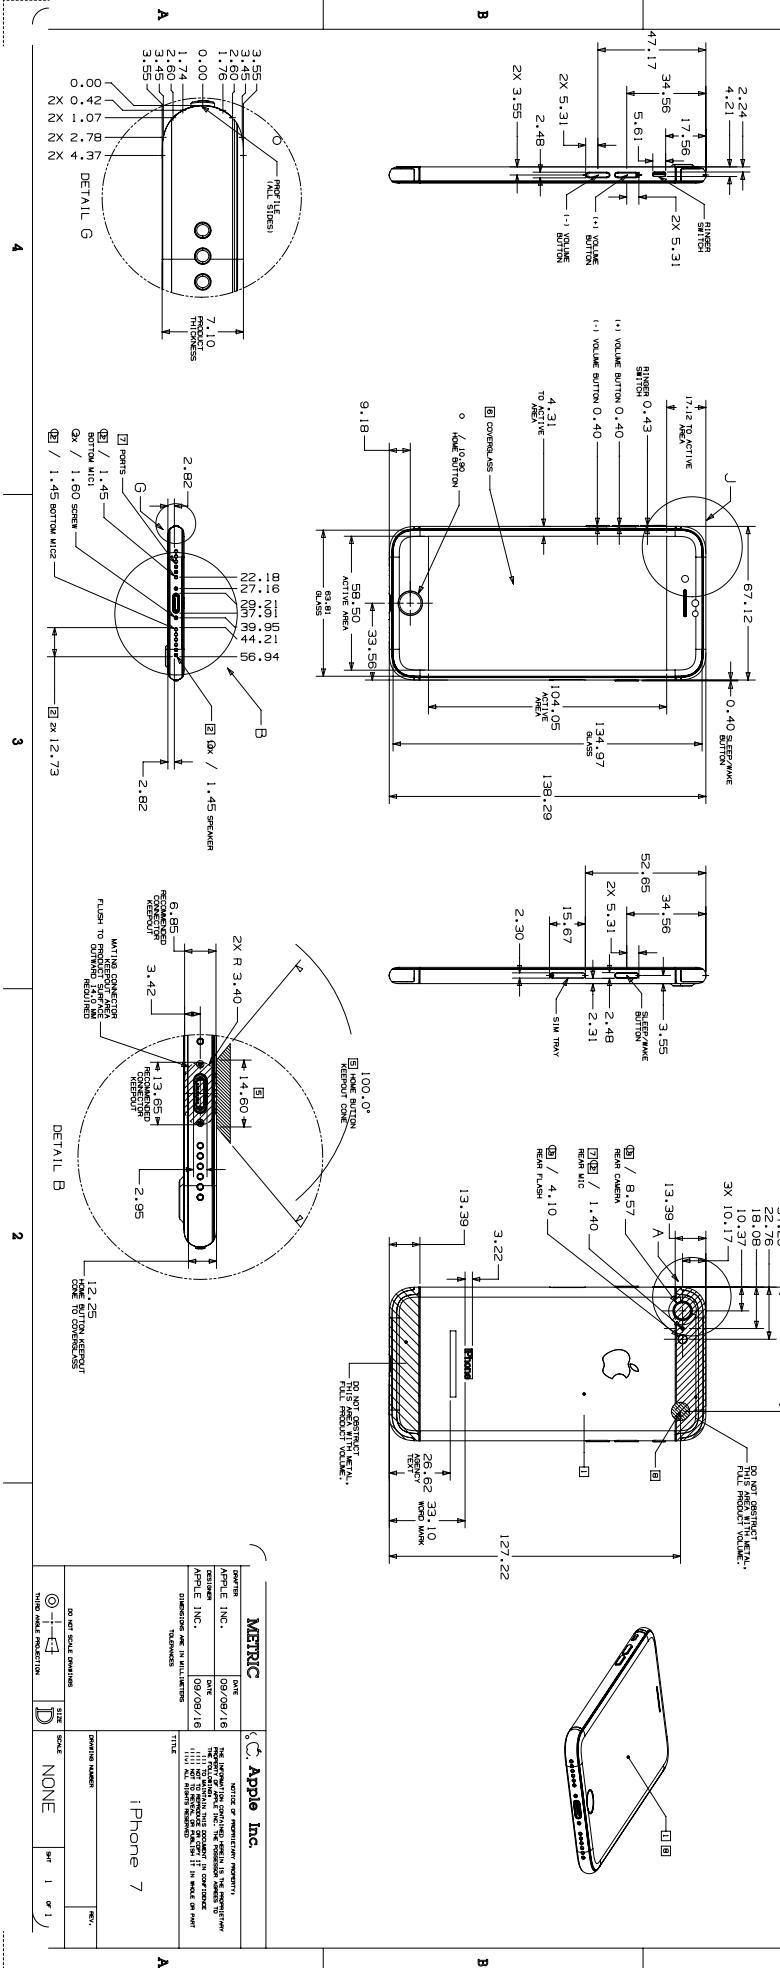

4

3

2



1

29.12 iPhone 6s Plus

NOTES

- D**

  - 1 NO METAL CONTACT WITH ANY IPHONE METAL.
  - 2 DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC1, BOTTOM MIC2, RECEIVER, AND SPEAKER.
  - 3 DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
  - 4 DO NOT OBSTRUCT THE PROXIMITY SENSOR OR AMBIENT LIGHT SENSOR (ALS).
  - 5 DO NOT OBSTRUCT THE HOME BUTTON.
  - 6 DO NOT TOUCH GLASS.

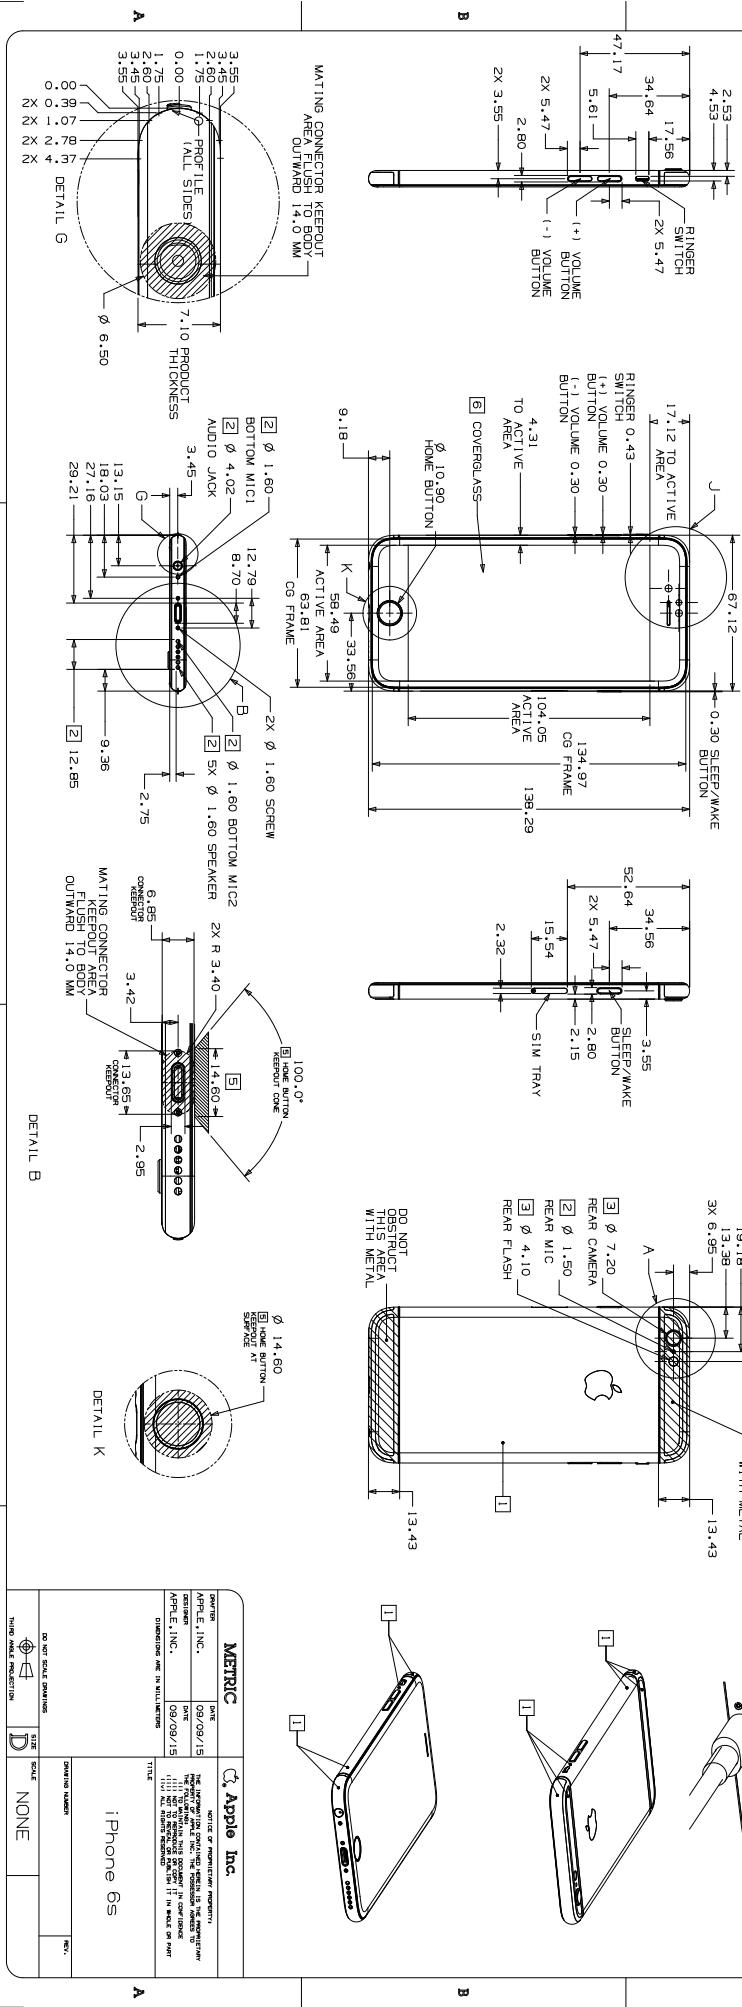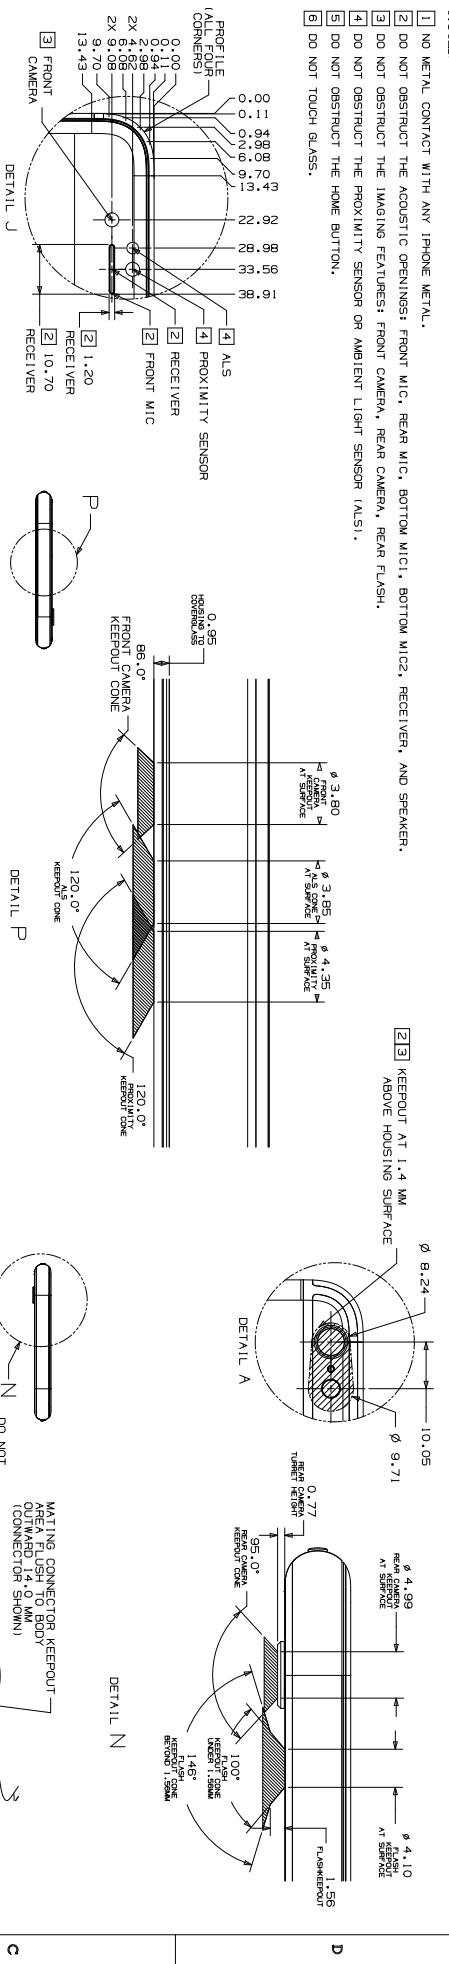

29.14 iPhone 6 Plus

**NOTES:**

- [1] NO METAL CONTACT WITH iPhone METAL.
- [2] DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: FRONT MIC, REAR MIC, BOTTOM MIC, EARPICE, AND SPEAKER.
- [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
- [4] DO NOT OBSTRUCT THE PROXIMITY SENSOR OR ALS (AMBIENT LIGHT SENSOR).
- [5] DO NOT OBSTRUCT THE HOME BUTTON.
- [6] DO NOT TOUCH GLASS.

The technical drawing illustrates the internal assembly and external dimensions of the iPhone 6 Plus. It includes several detailed views (A, B, C, D, E-E, F, G, H, I, J, K) and callouts (1 through 6) highlighting specific components and their placement relative to the device's edges and corners. Key features shown include the front and rear cameras, proximity sensor, ALS cone, earpiece, microphone, speaker, volume buttons, home button, and SIM tray. Dimensions are provided in millimeters, and some parts are labeled with part numbers like R-SWITCH, VOLUME, and PRODUCT THICKNESS. The drawing also shows the housing-to-coverglass gap and the location of metal keepouts around the home button area.


**Metric:**

Metric	Apple Inc.
Part No.	008-094715
Apple Inc.	http://apple.com/094715
Apple Inc.	http://apple.com/094715
Dimensions are in millimeters	Dimensions are in millimeters
Title	iPhone 6 Plus
Printable Projection	D
Do Not Scale Drawing	None
Scale	Per 1 or 1

NOTES

- D**

  - [1] NO METAL CONTACT WITH IPHONE METAL.
  - [2] DO NOT OBSTRUCT THE ACOUSTIC GEMINIES, FRONT MIC, REAR MIC, BOTTOM MIC, EARPIECE, AND SPEAKER.
  - [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH.
  - [4] DO NOT OBSTRUCT THE PROXIMITY SENSOR OR ALS (AMBIENT LIGHT SENSOR).
  - [5] DO NOT OBSTRUCT THE HOME BUTTON.
  - [6] DO NOT TOUCH GLASS.

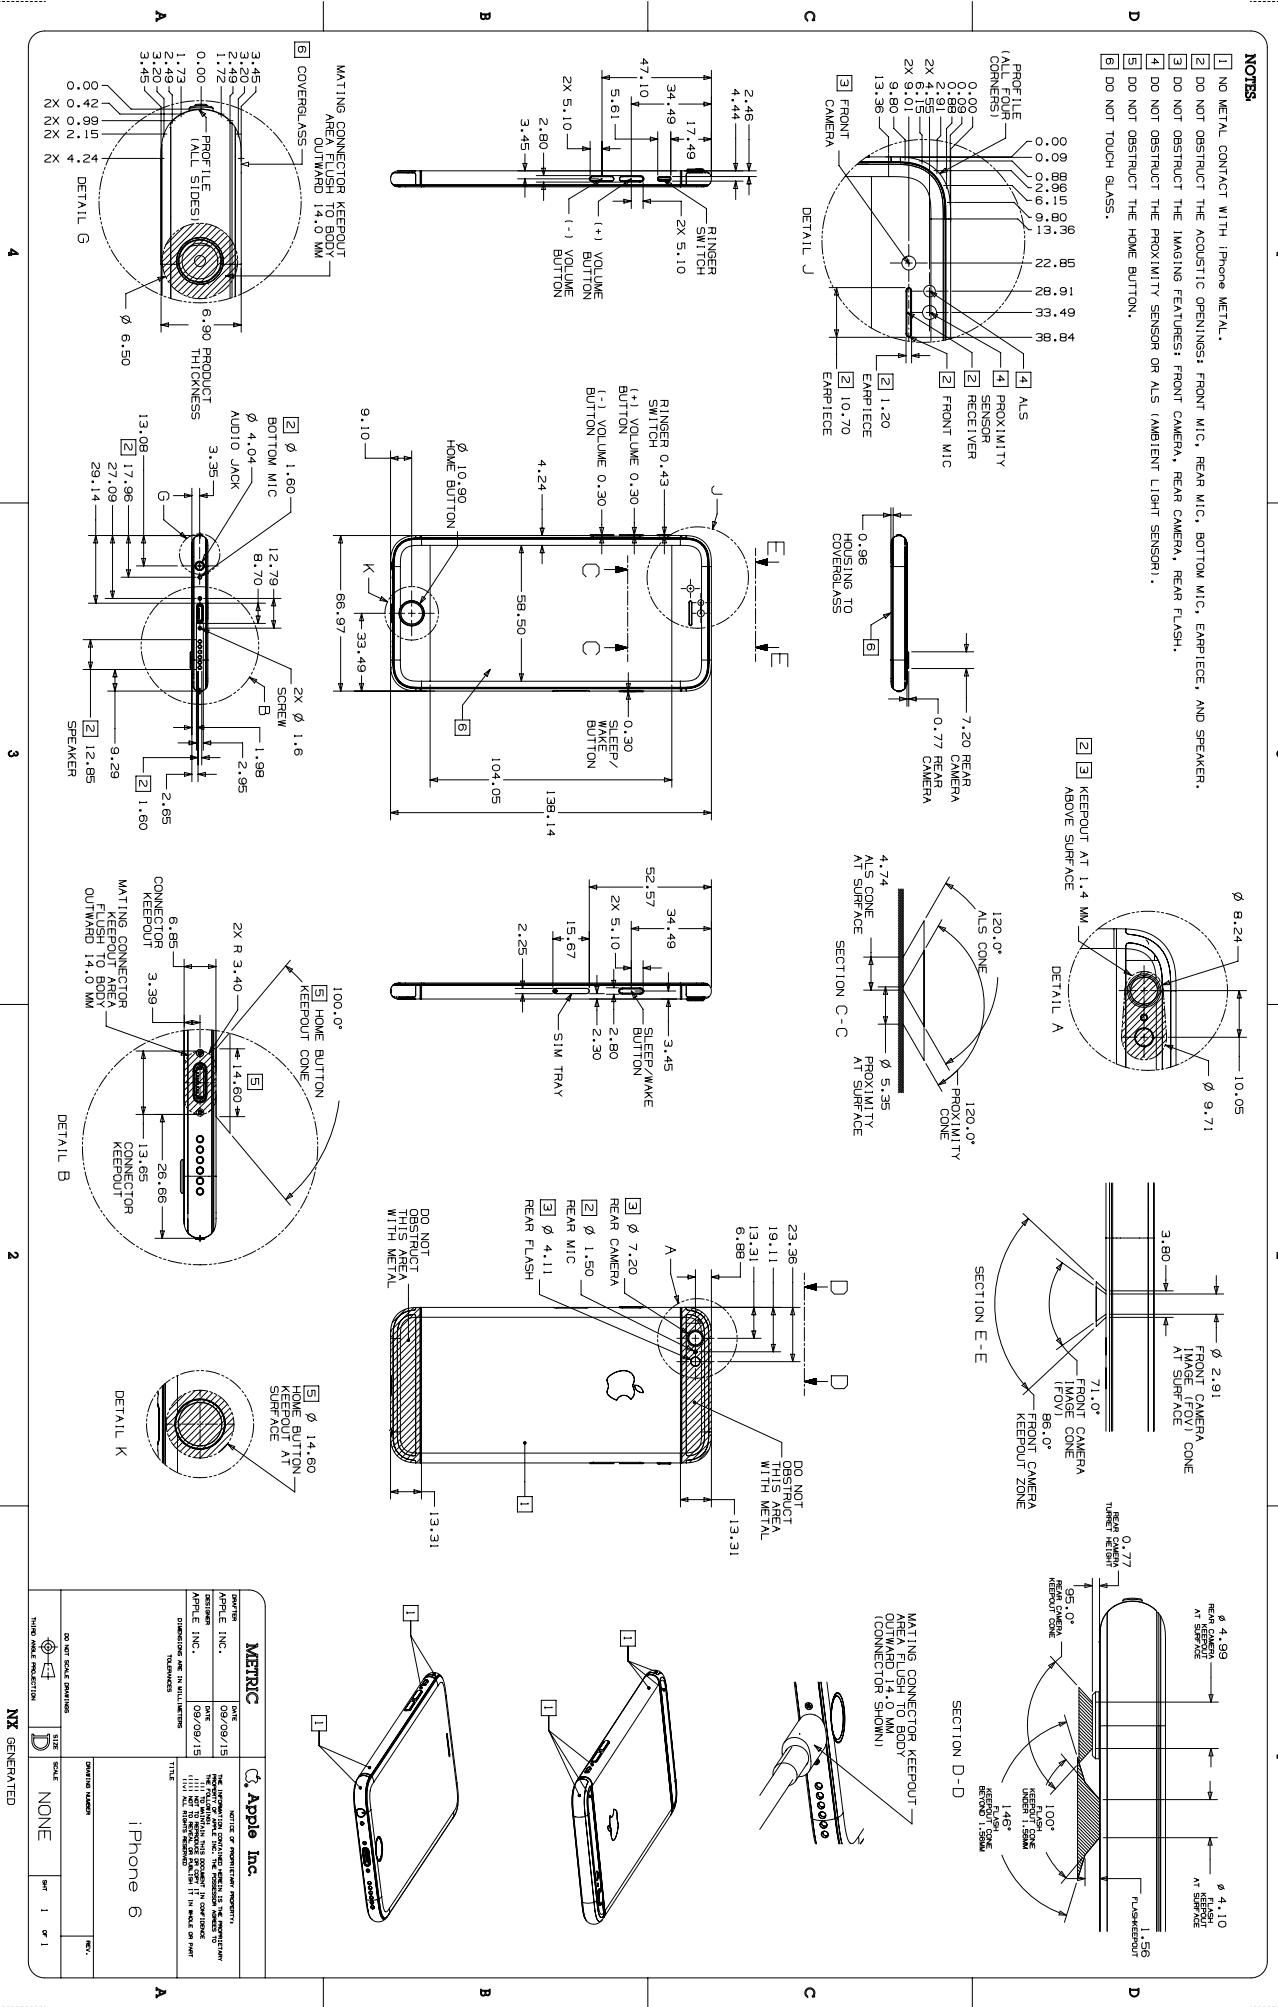





**[1]** DO NOT OBSTRUCT THE ACOUSTIC OPENINGS; FRONT MIC, REAR MIC, EARPIECE, AND SPEAKER.  
**[2]** DO NOT OBSTRUCT THE IMAGING FEATURES; FRONT CAMERA, REAR CAMERA, REAR FLASH.  
**[3]** DO NOT OBSTRUCT THE PROXIMITY SENSOR OR ALS (AMBIENT LIGHT SENSOR).

The diagram illustrates the field of view of the front camera (FOV) cone and the rear camera cone relative to the ALS cone at the surface. The vertical axis is labeled POUT. The front camera cone is centered at  $\phi = 3.87$  and the rear camera cone is centered at  $\phi = 6.59$ . Both cones overlap with the ALS cone, which is centered at  $\phi = 4.39$ .


$\phi$  3.27  
FLASH CONE  
AREA AT SURFACE

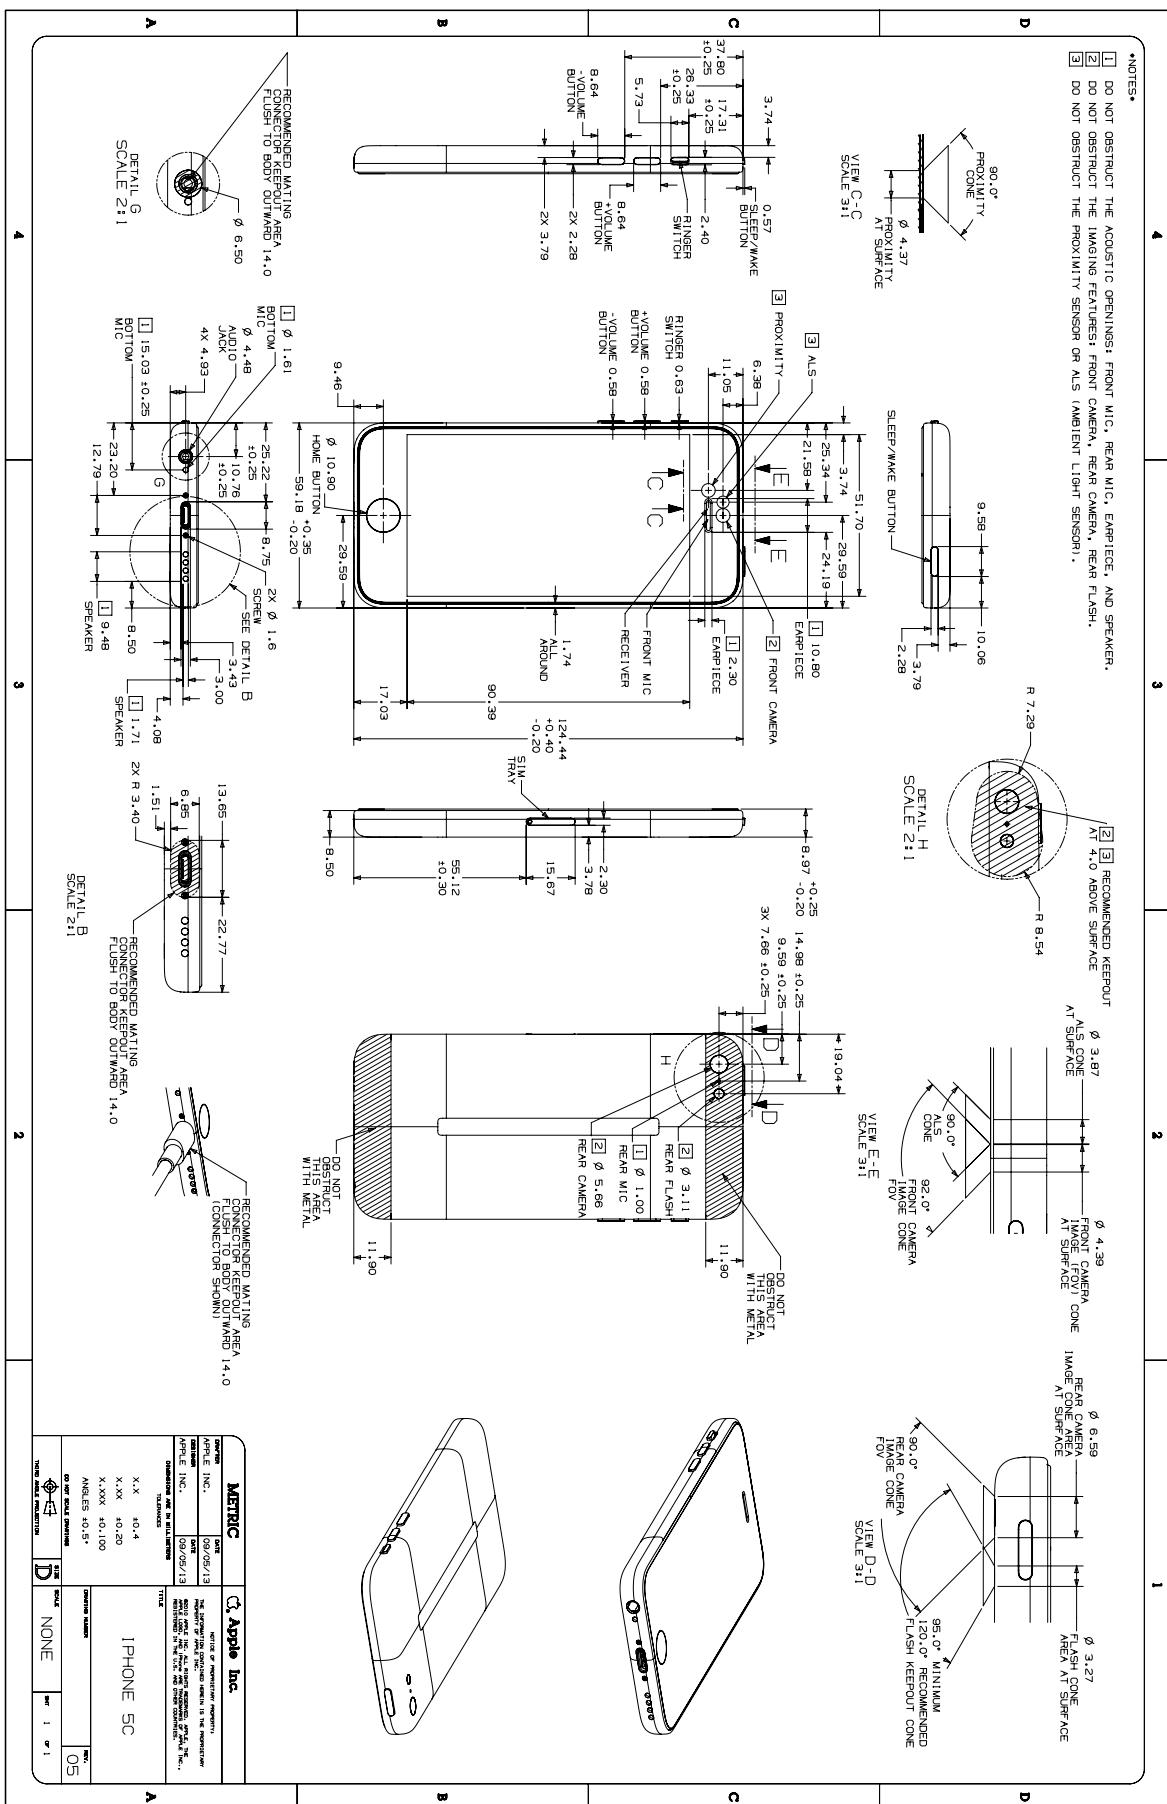


# 29.18 iPhone 5

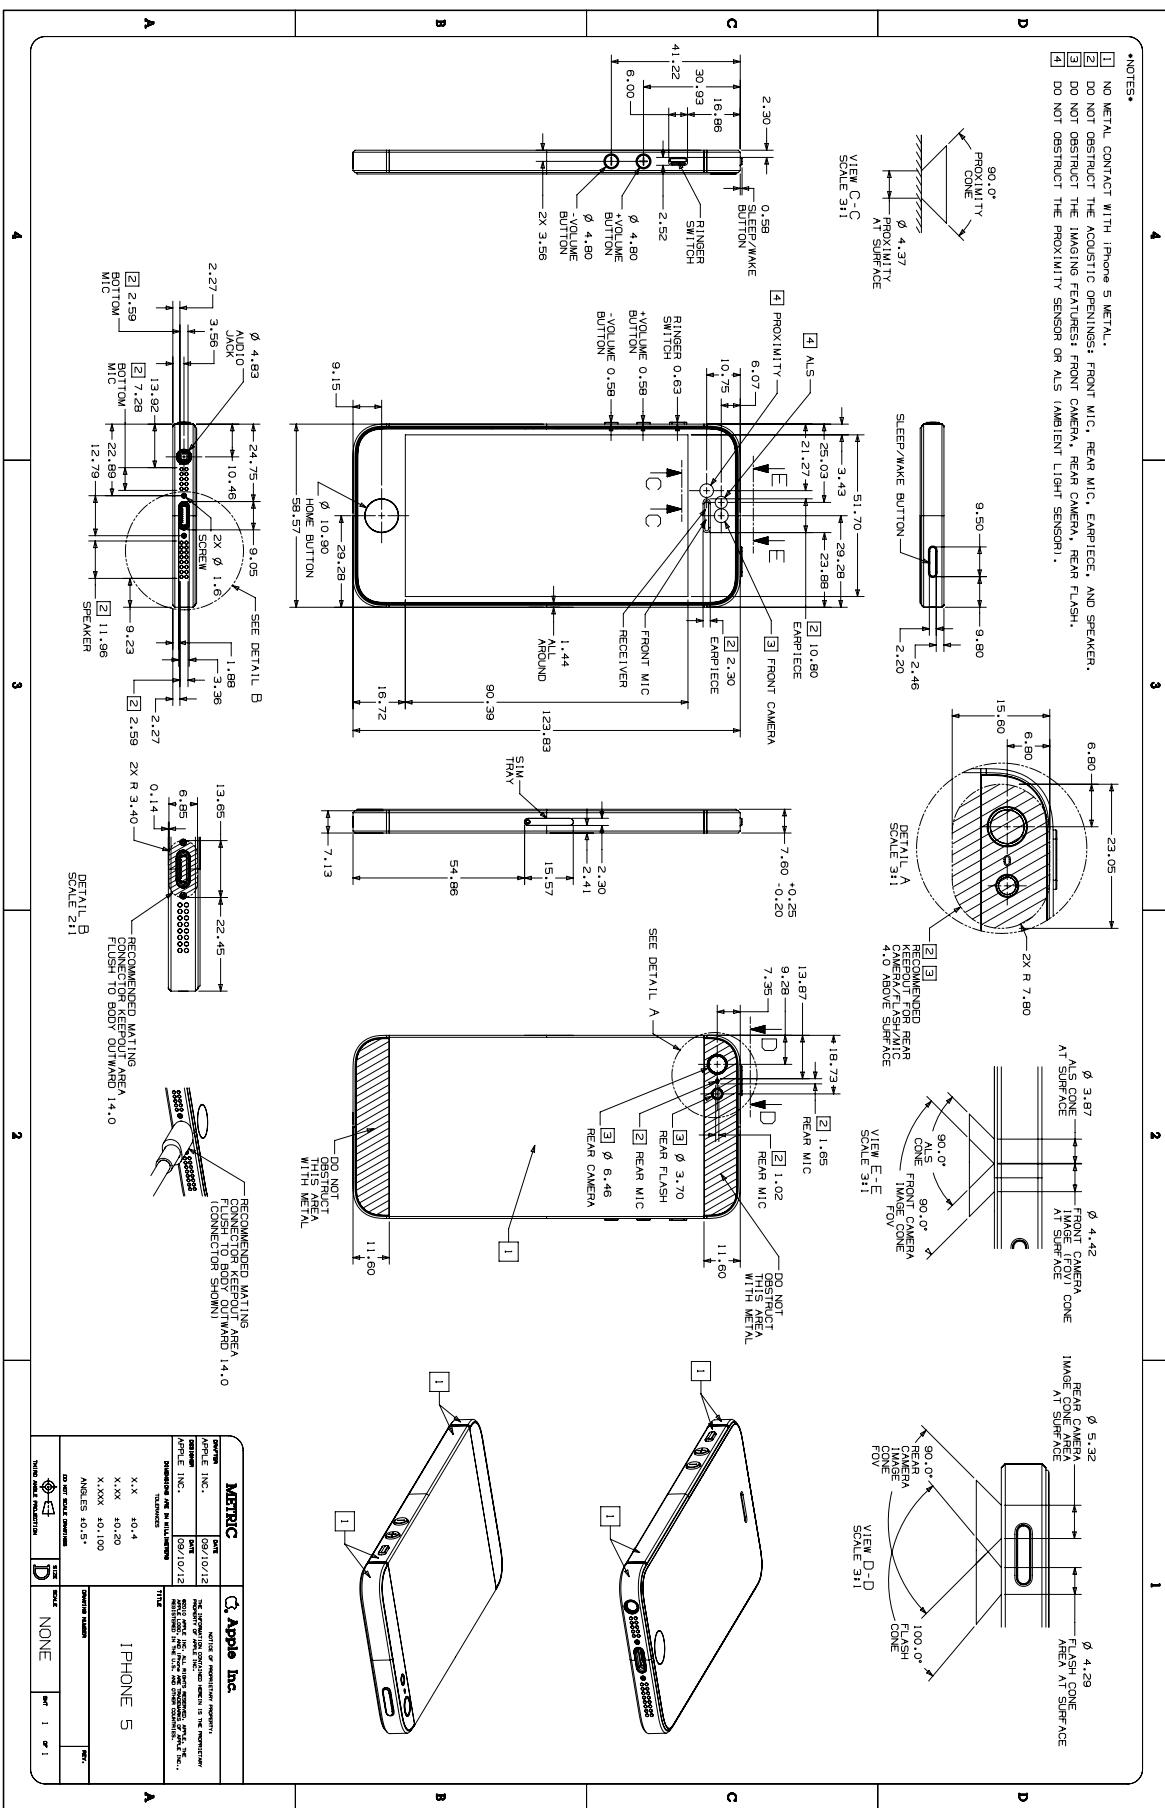



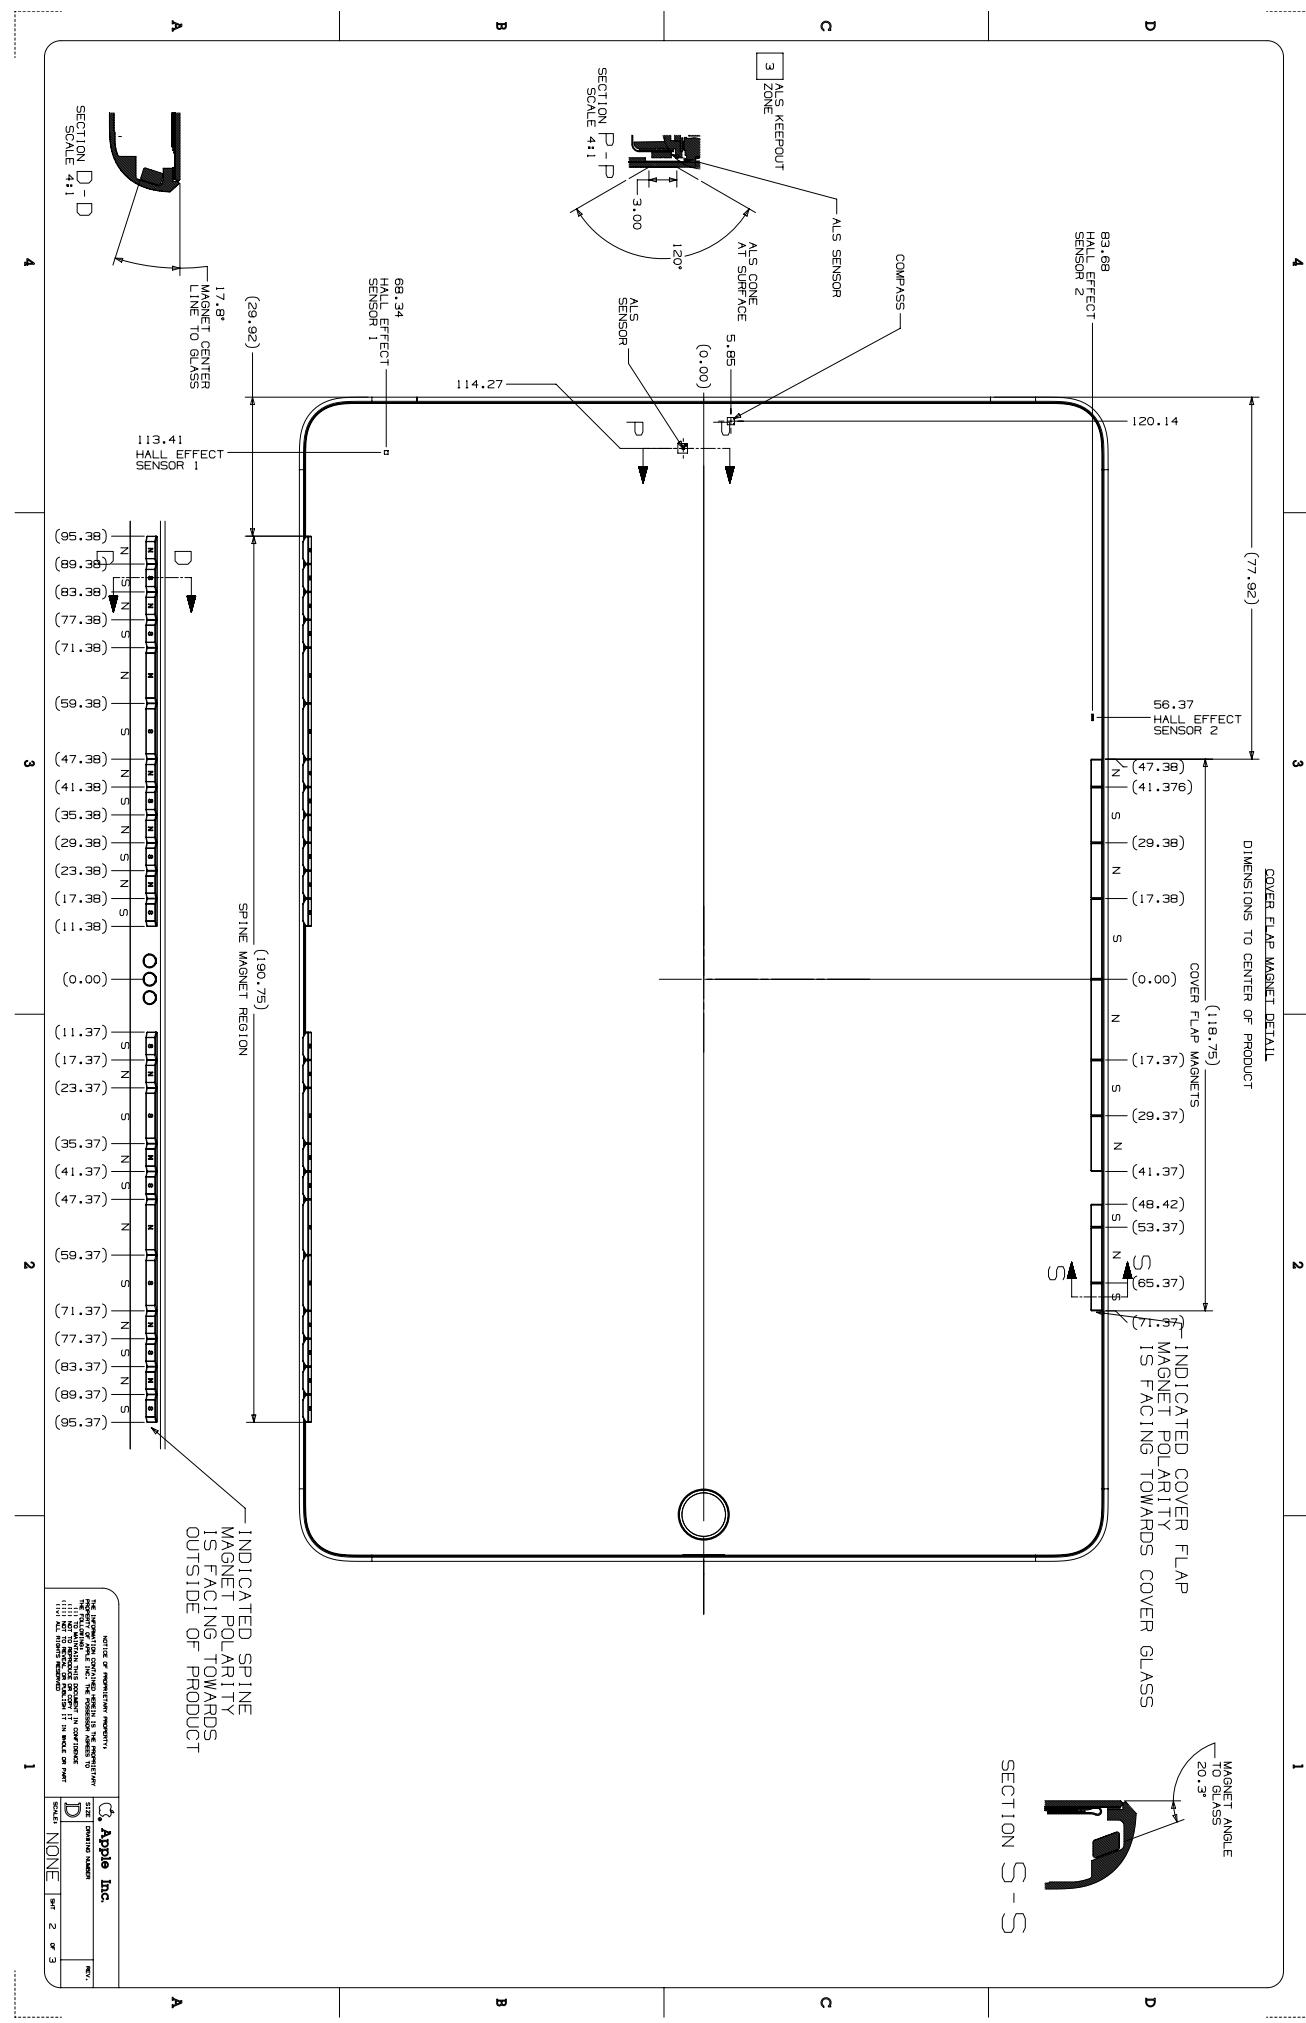

29.21 iPad (7th generation) 3 of 3

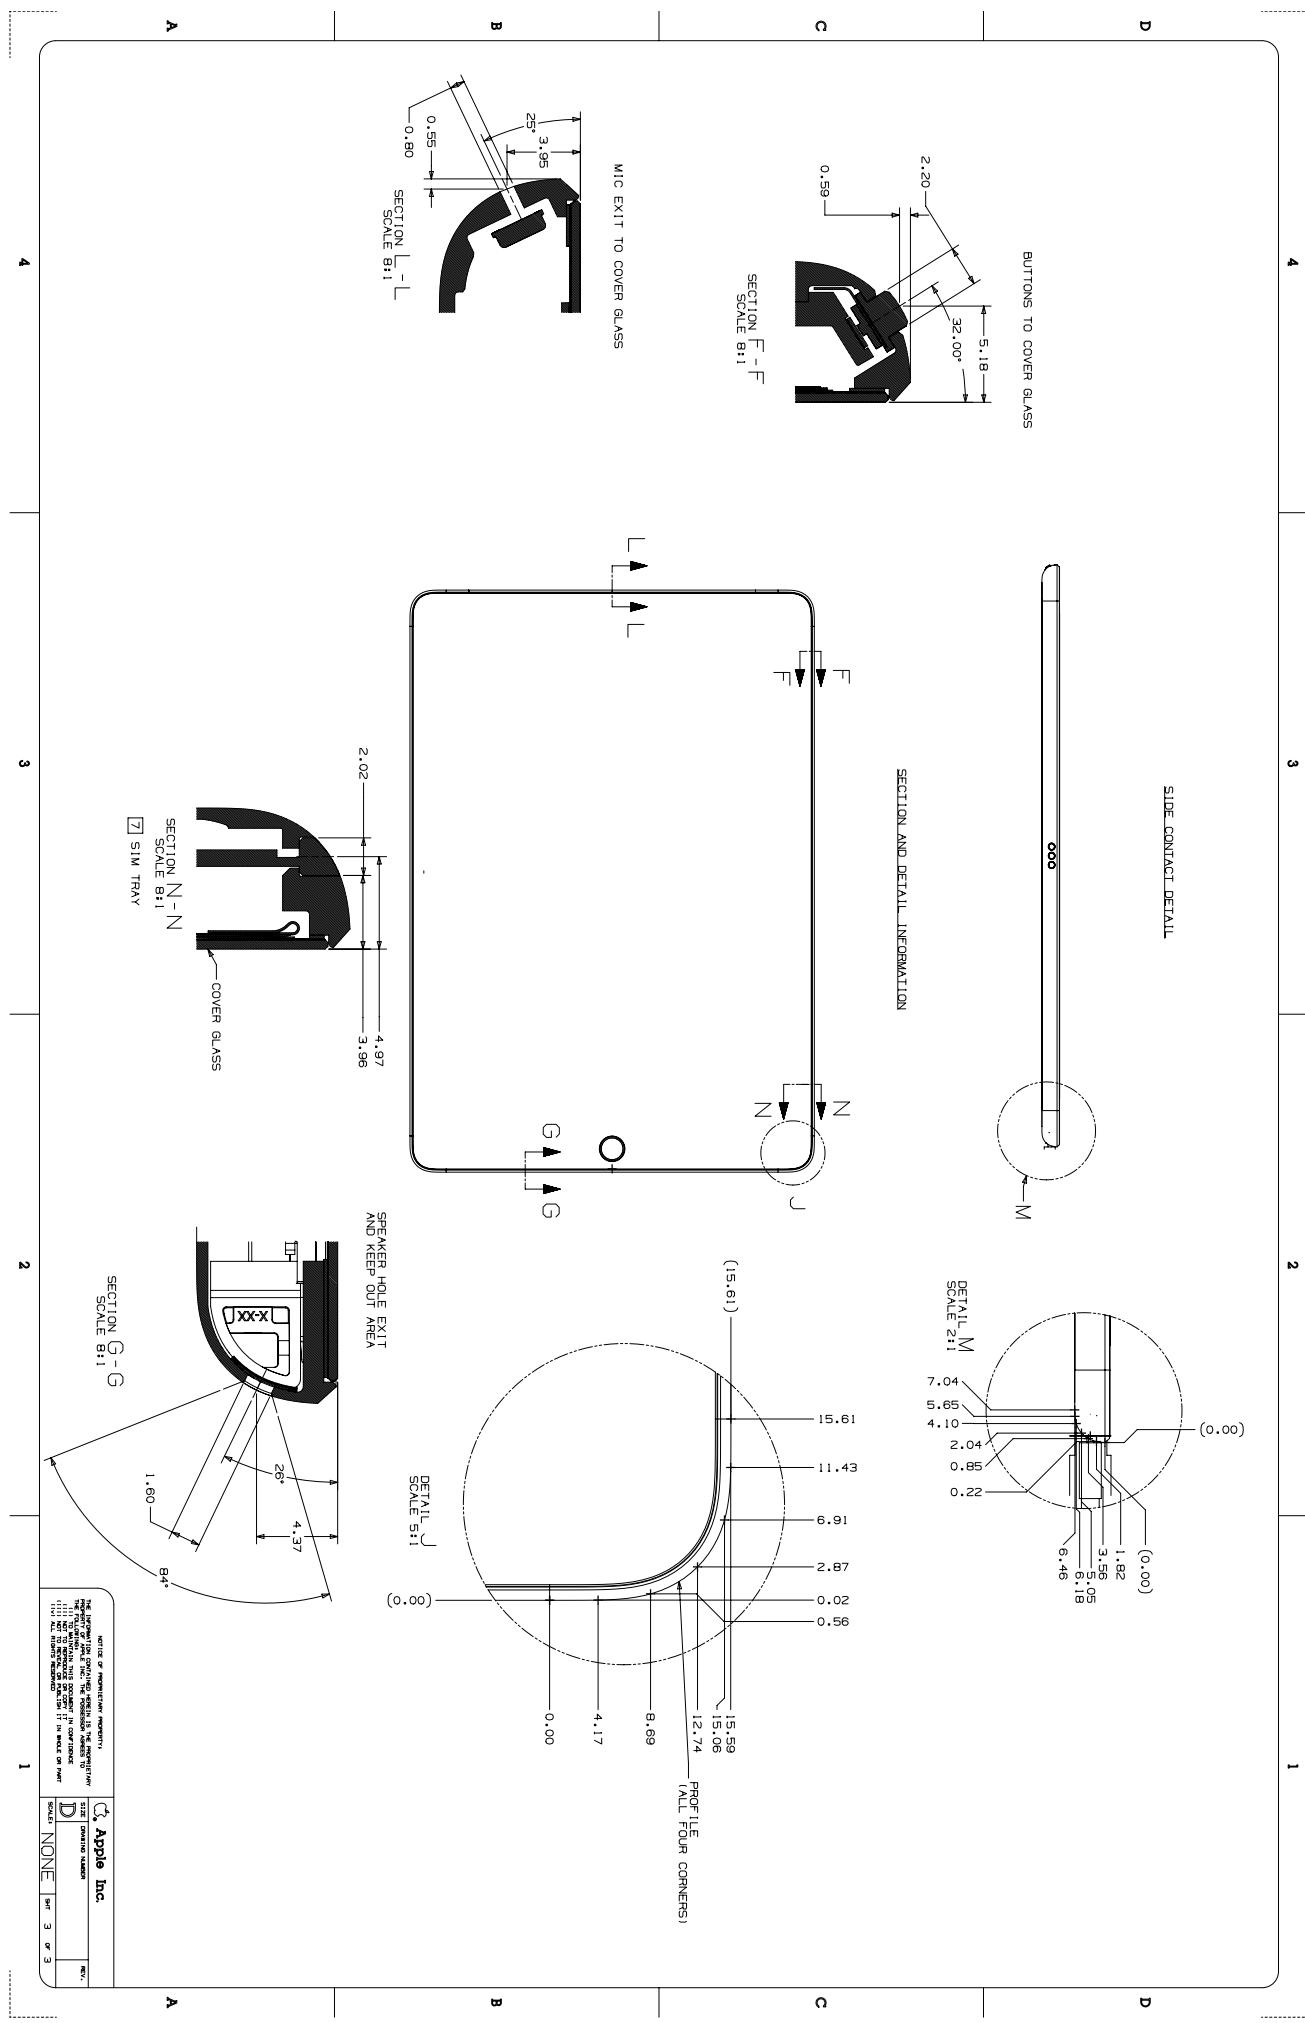







# 29.22 iPad Air (3rd generation) with Wi-Fi 1 of 3

**NOTES:**

- [1] DO NOT OBSTRUCT ACOUSTIC OPENINGS : SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
- [2] DO NOT OBSTRUCT THE IMAGE FEATURES : FRONT CAMERA, REAR CAMERA
- [3] DO NOT OBSTRUCT Ambient LIGHT SENSOR (ALS)
- [4] DO NOT OBSTRUCT THE HOME BUTTON
- [5] DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS

R

R

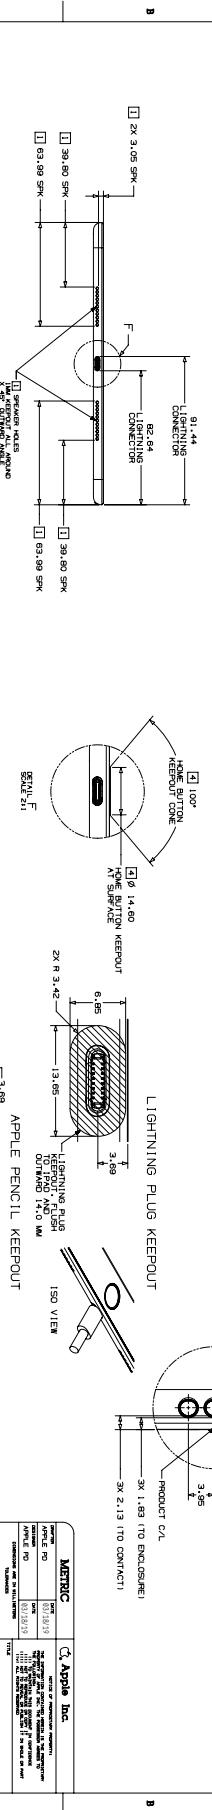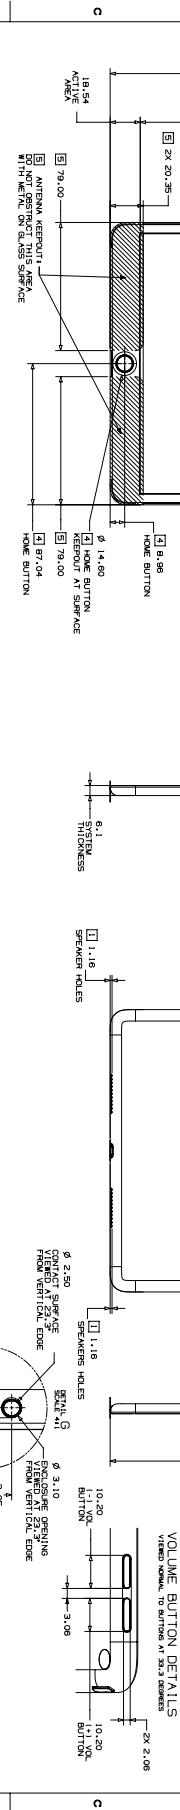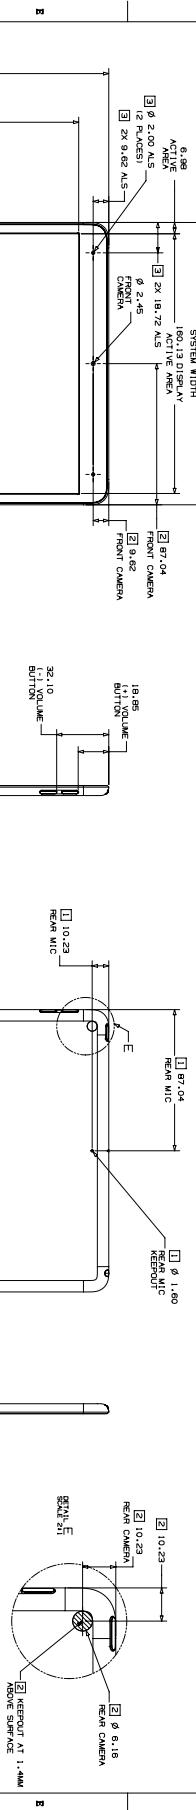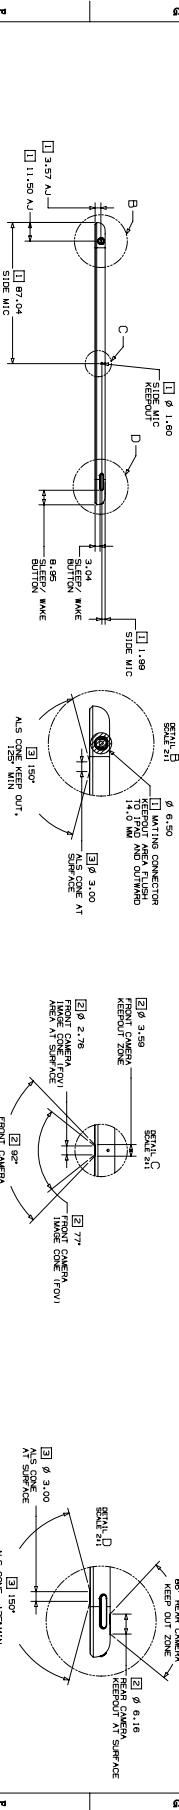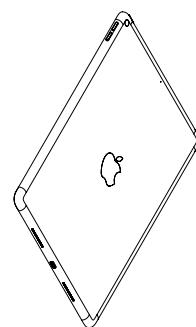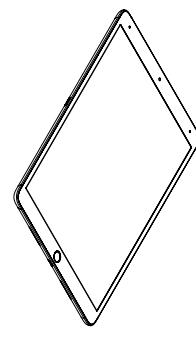


A

R


29.23 iPad Air (3rd generation) with Wi-Fi 2 of 3

POLARITY SHOWN NORMAL TO GLASS DIMENSIONS TO CENTER OF PRODUCT  
 "N" = NORTH  
 "S" = SOUTH

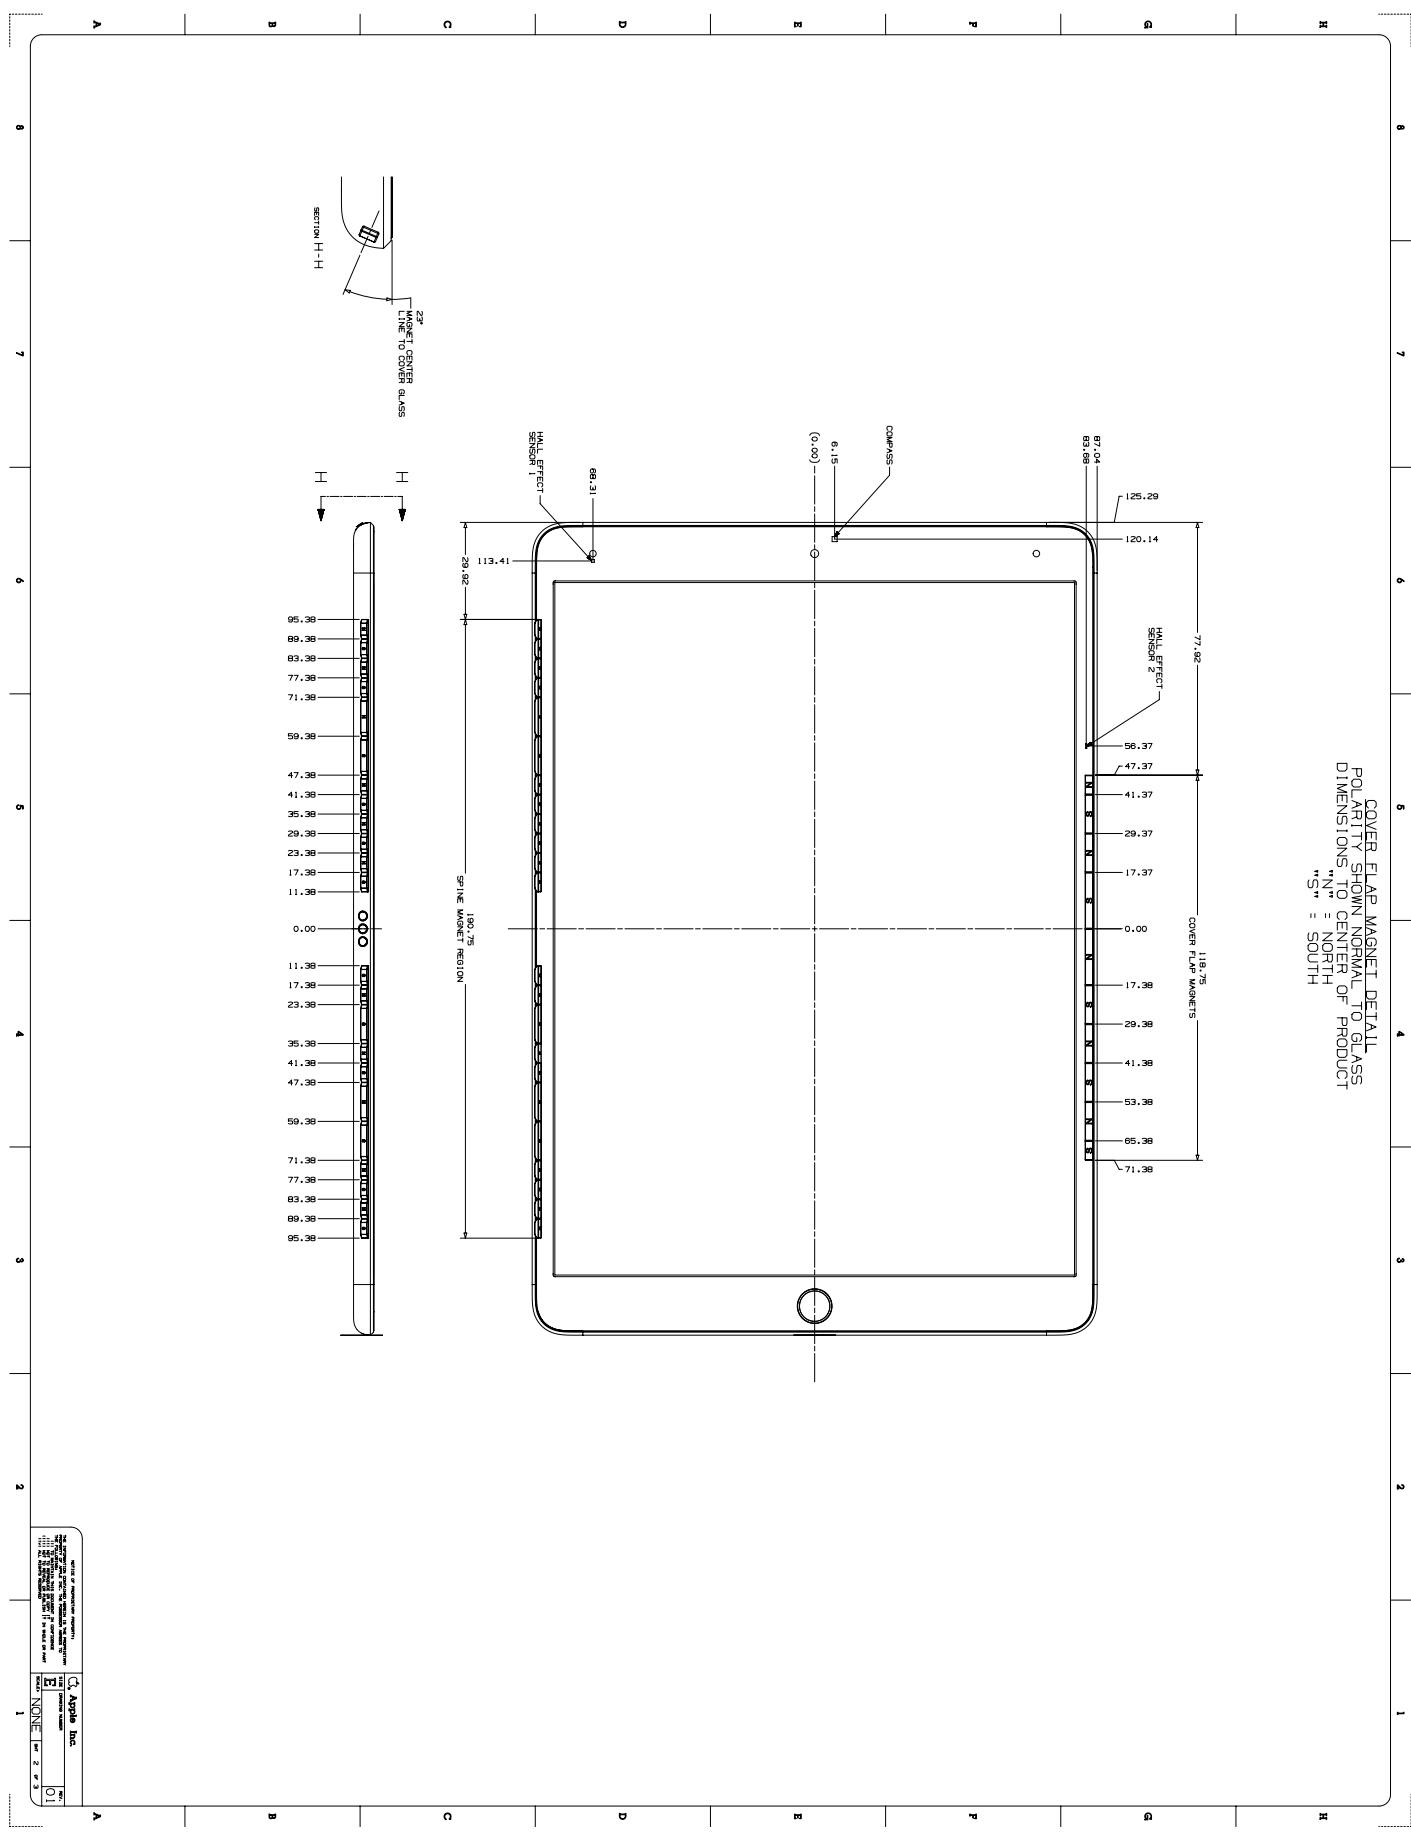




29.24 iPad Air (3rd generation) with Wi-Fi 3 of 3

## SECTION AND DETAIL INFORMATION

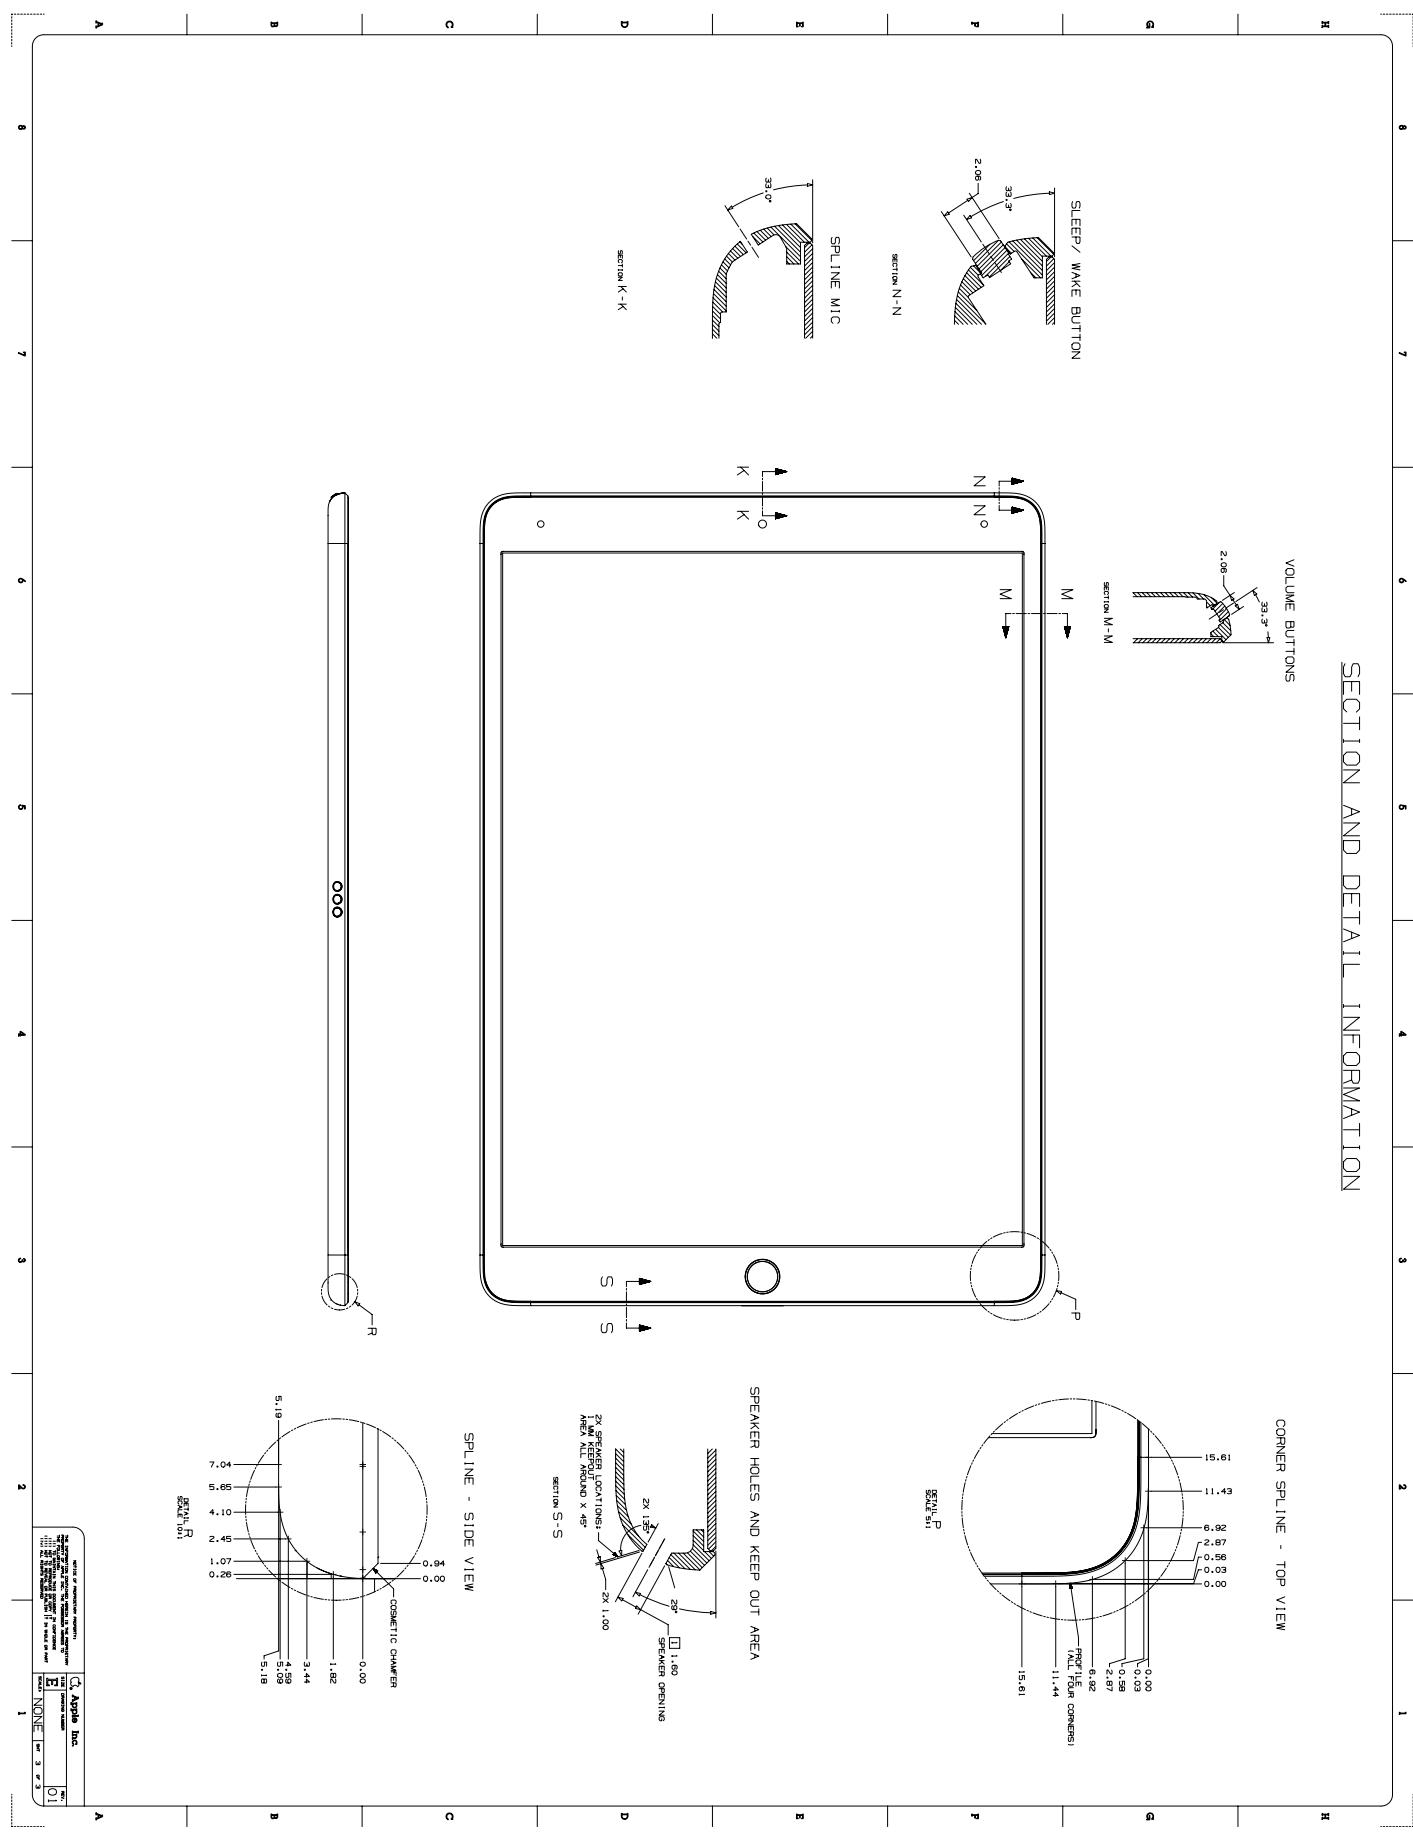


29.25 iPad Air (3rd generation) with Wi-Fi + Cellular 1 of 3

- [ ] DO NOT OBSTRUCT ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
- [ ] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH
- [ ] DO NOT OBSTRUCT Ambient LIGHT SENSOR (ALS)
- [ ] DO NOT OBSTRUCT THE HOME BUTTON
- [ ] DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS
- [ ] DO NOT HAVE METAL CONTACT WITH DEVICE ENCLOSURE

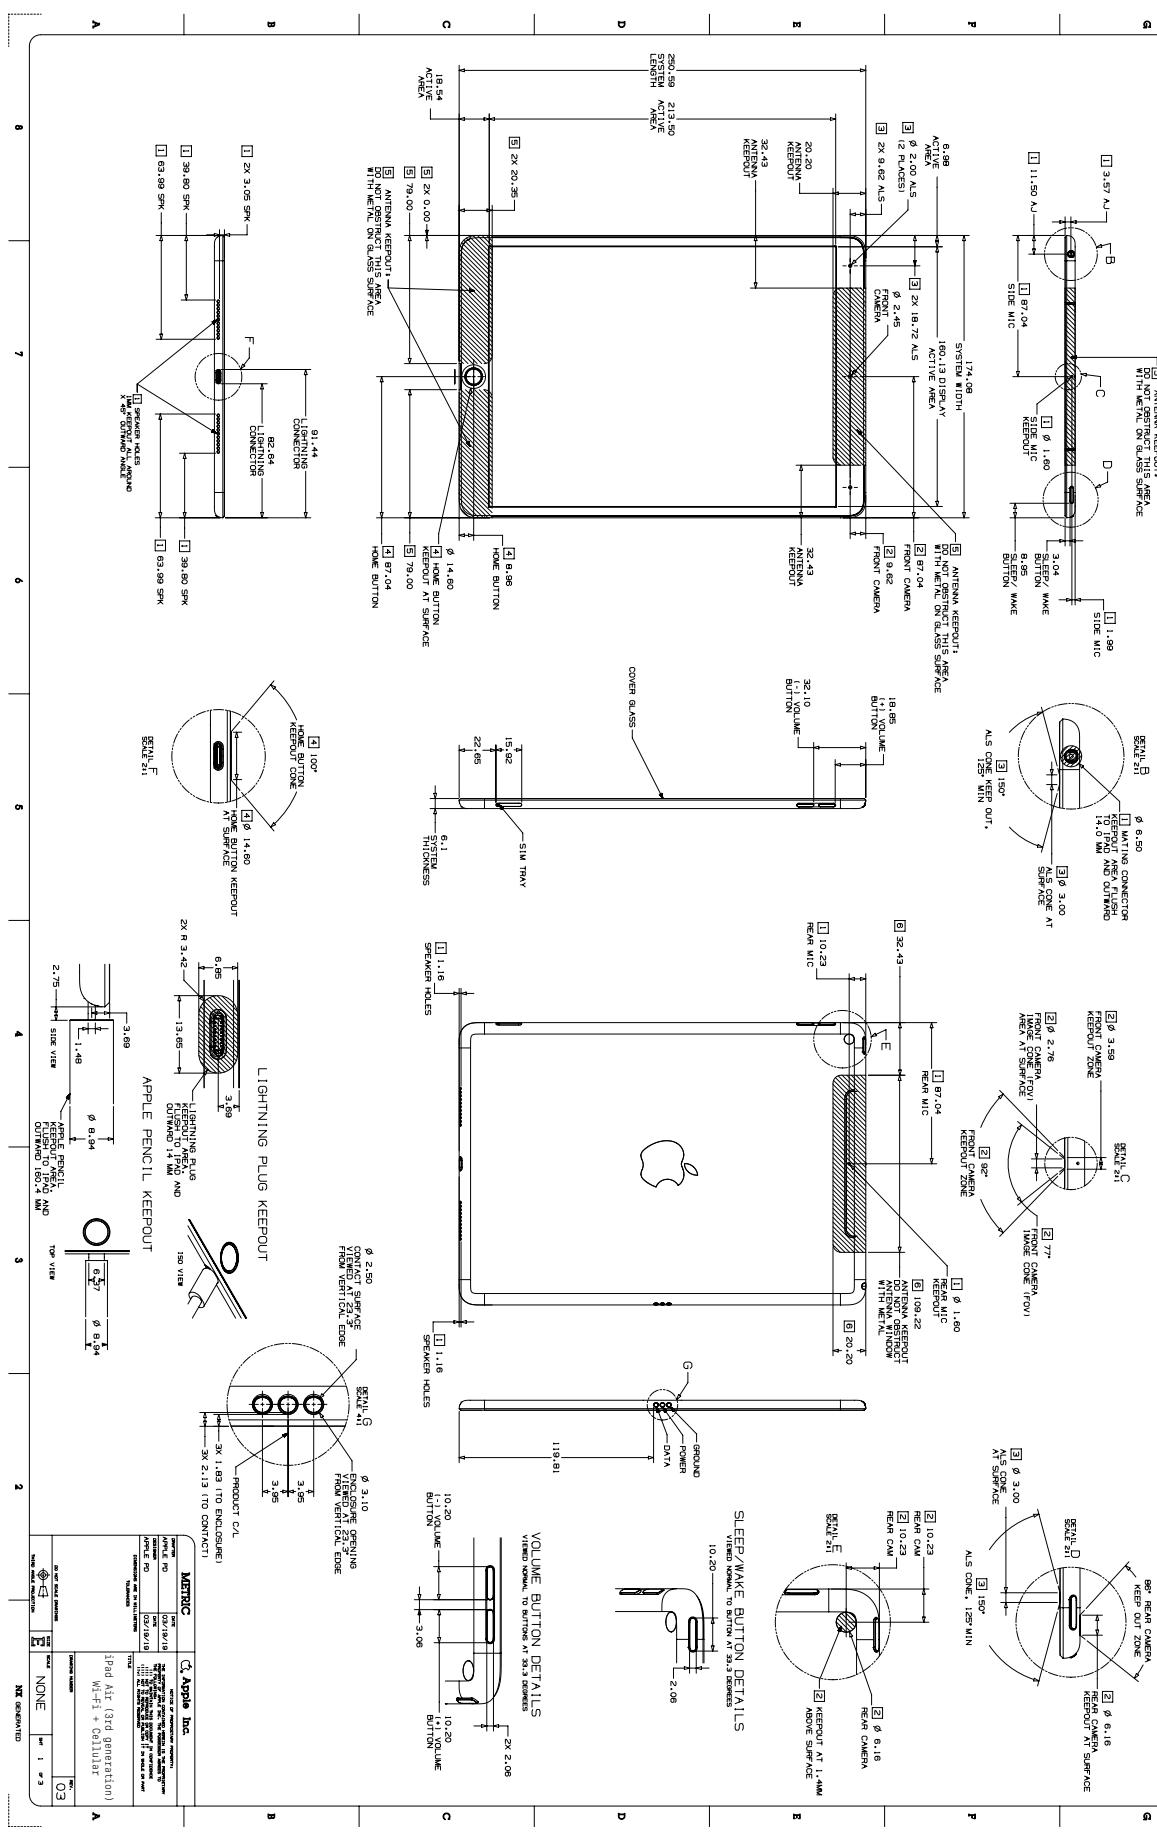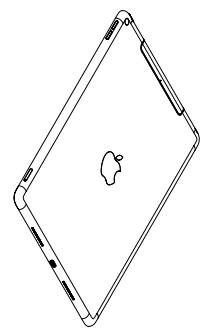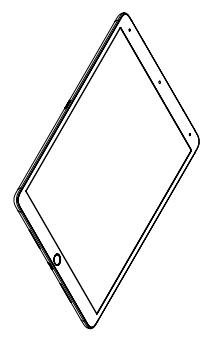


# 29.26 iPad Air (3rd generation) with Wi-Fi + Cellular 2 of 3

COVER FLAP MAGNET DETAIL  
POLARITY SHOWN NORMAL TO GLASS  
DIMENSIONS TO CENTER OF PRODUCT  
"N" = NORTH  
"S" = SOUTH

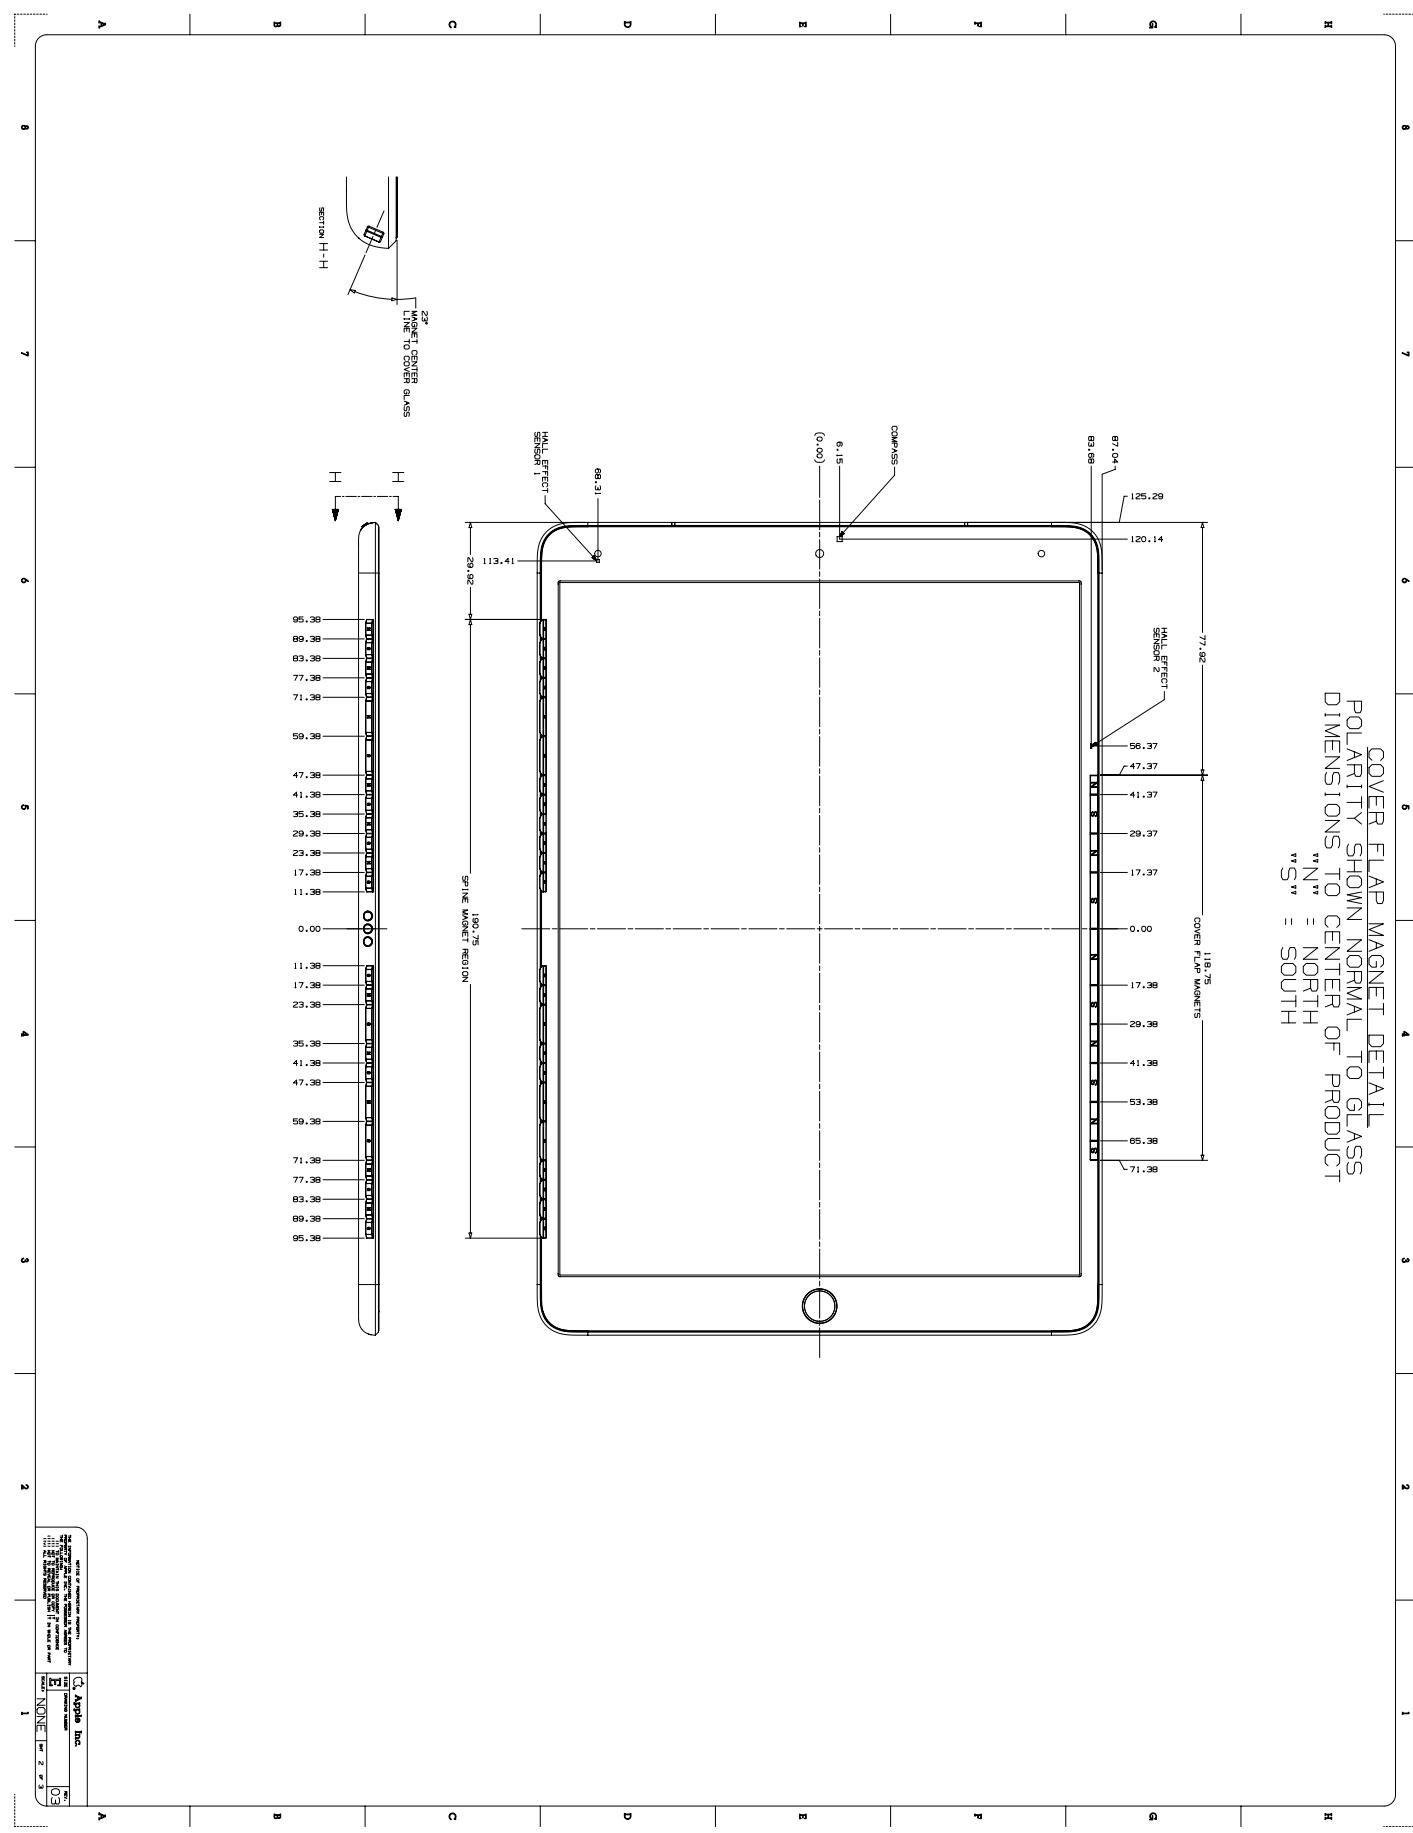


29.27 iPad Air (3rd generation) with Wi-Fi + Cellular 3 of 3

## SECTION AND DETAIL INFORMATION

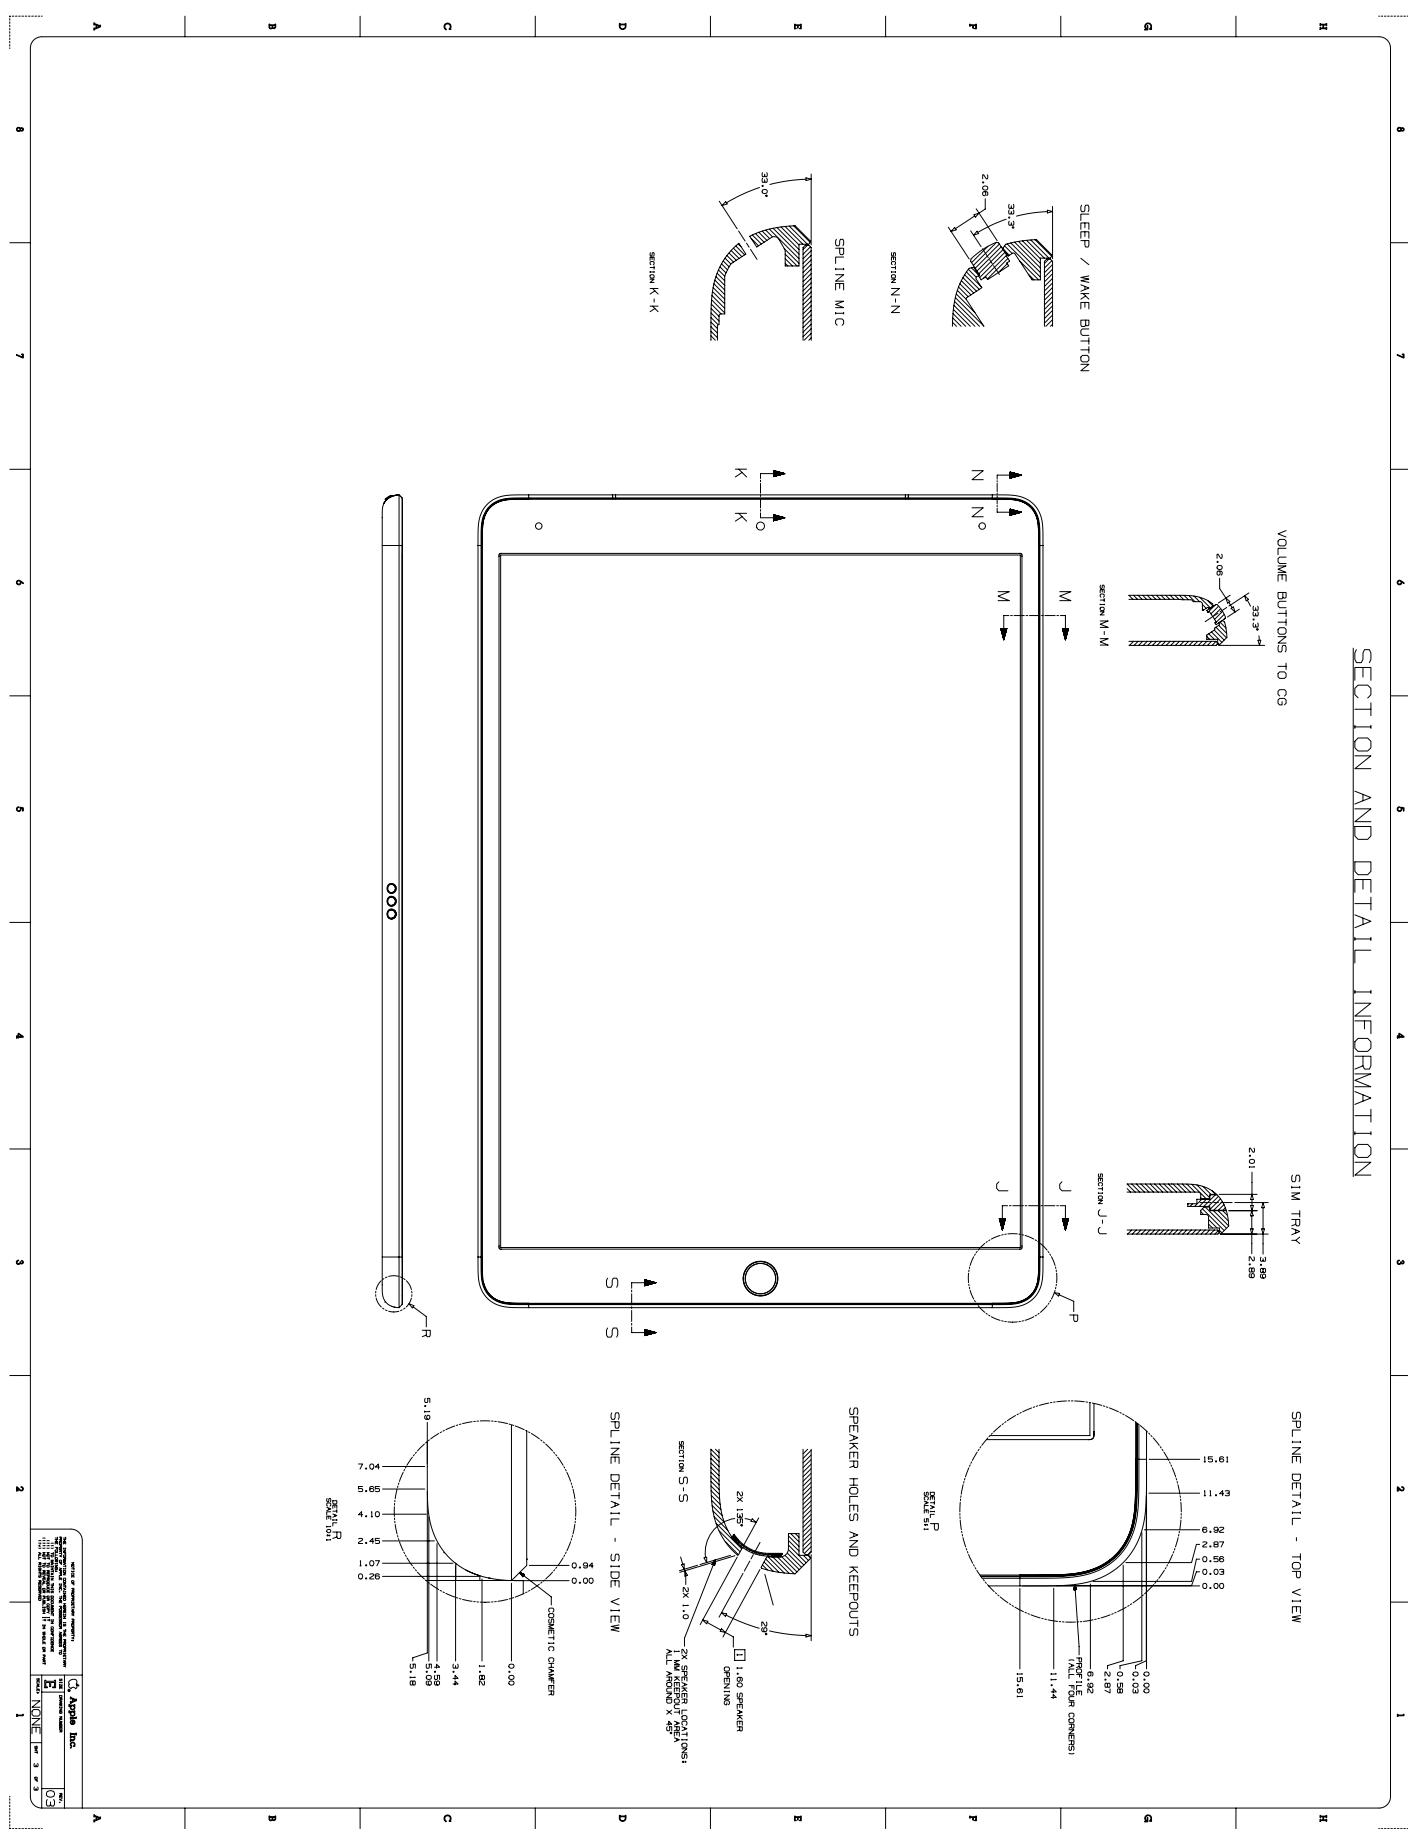




# 29.29 iPad mini (5th generation) with Wi-Fi 2 of 3

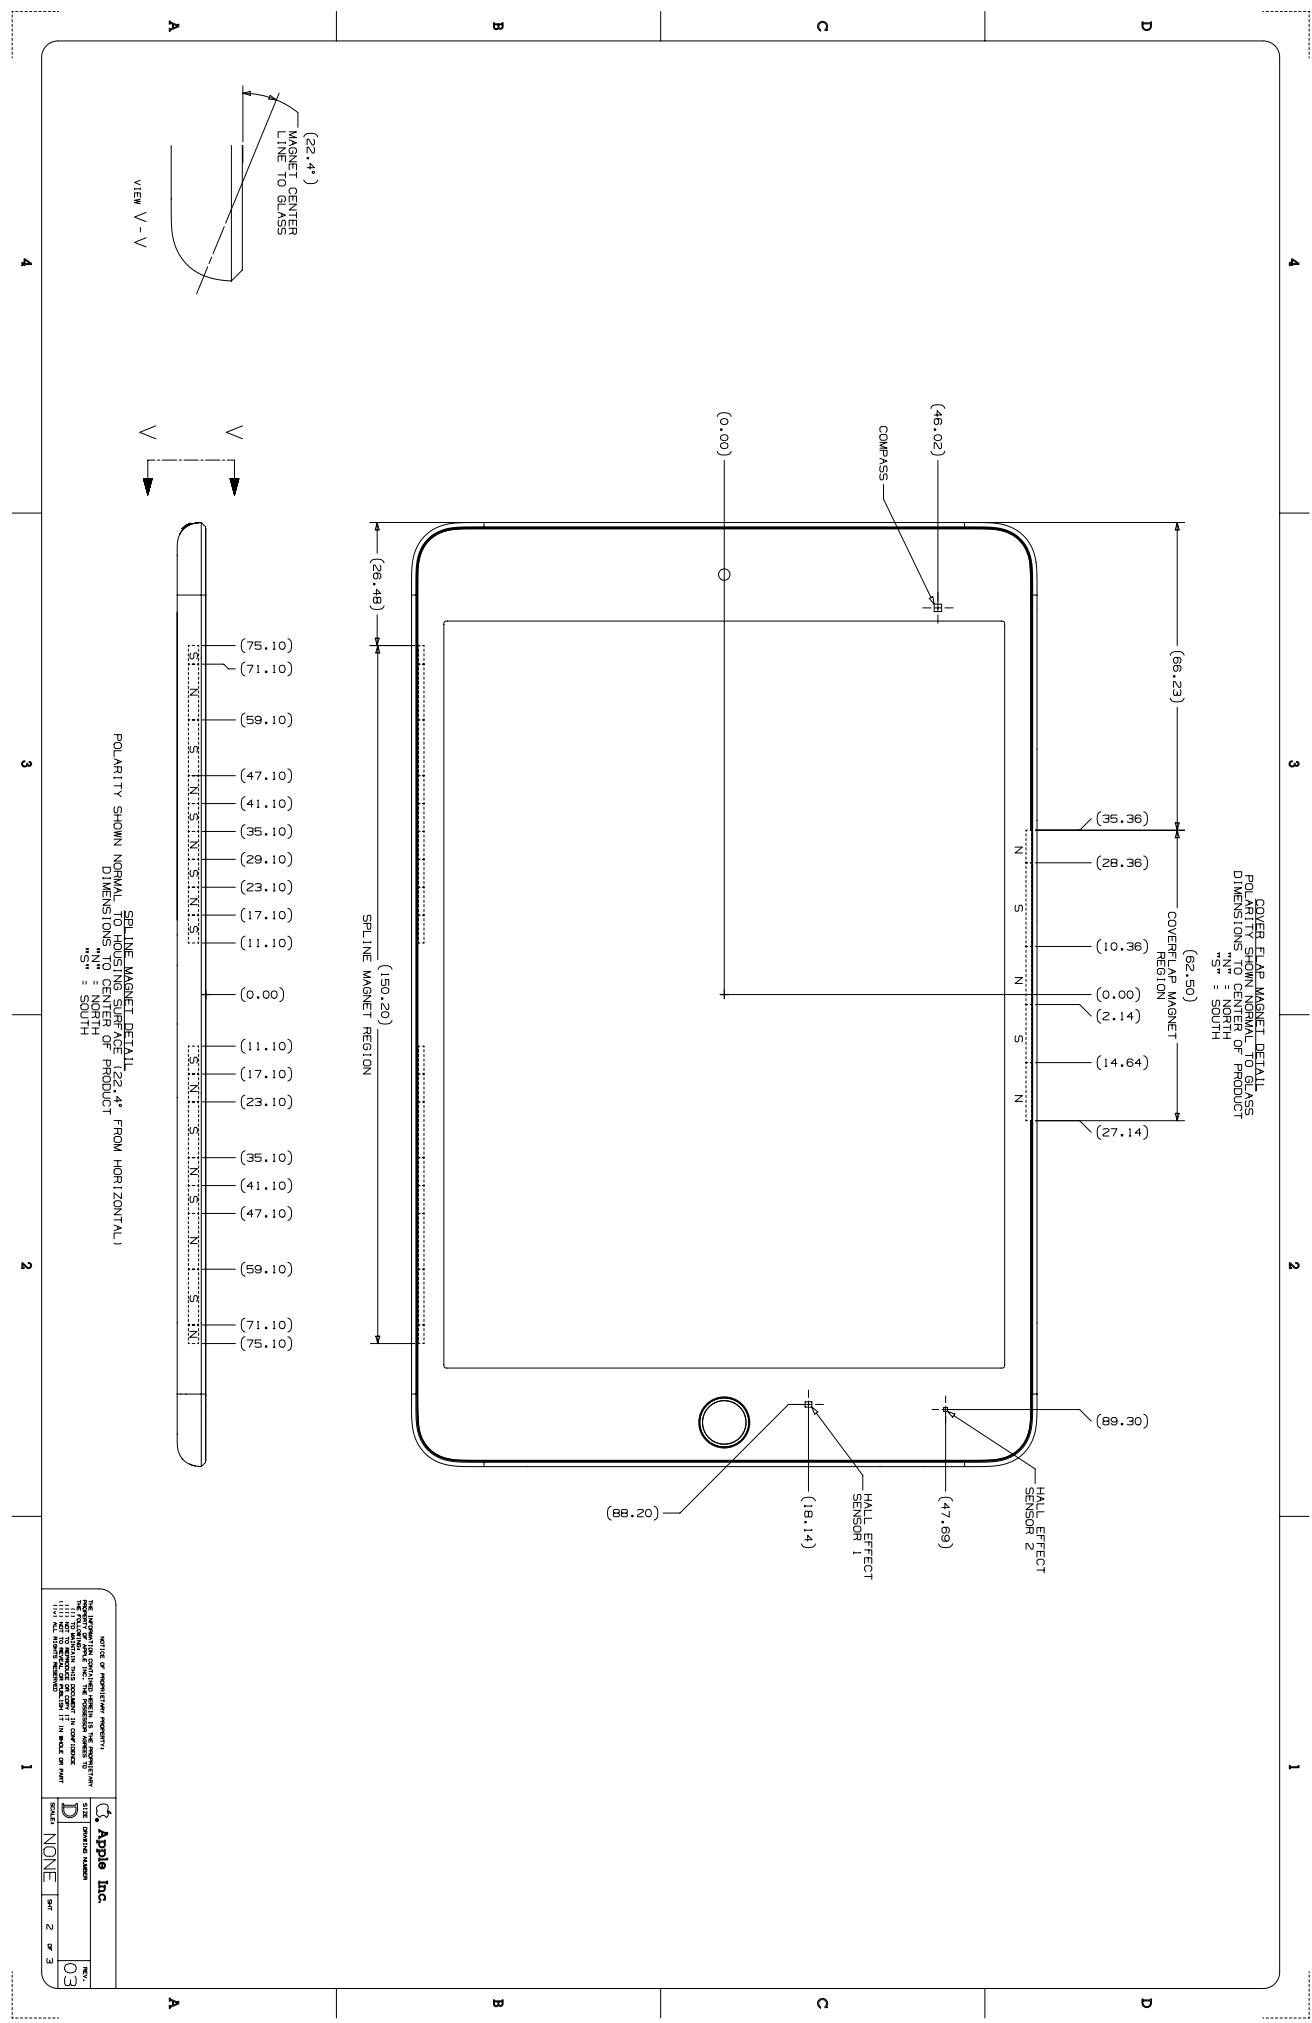

# 29.30 iPad mini (5th generation) with Wi-Fi 3 of 3

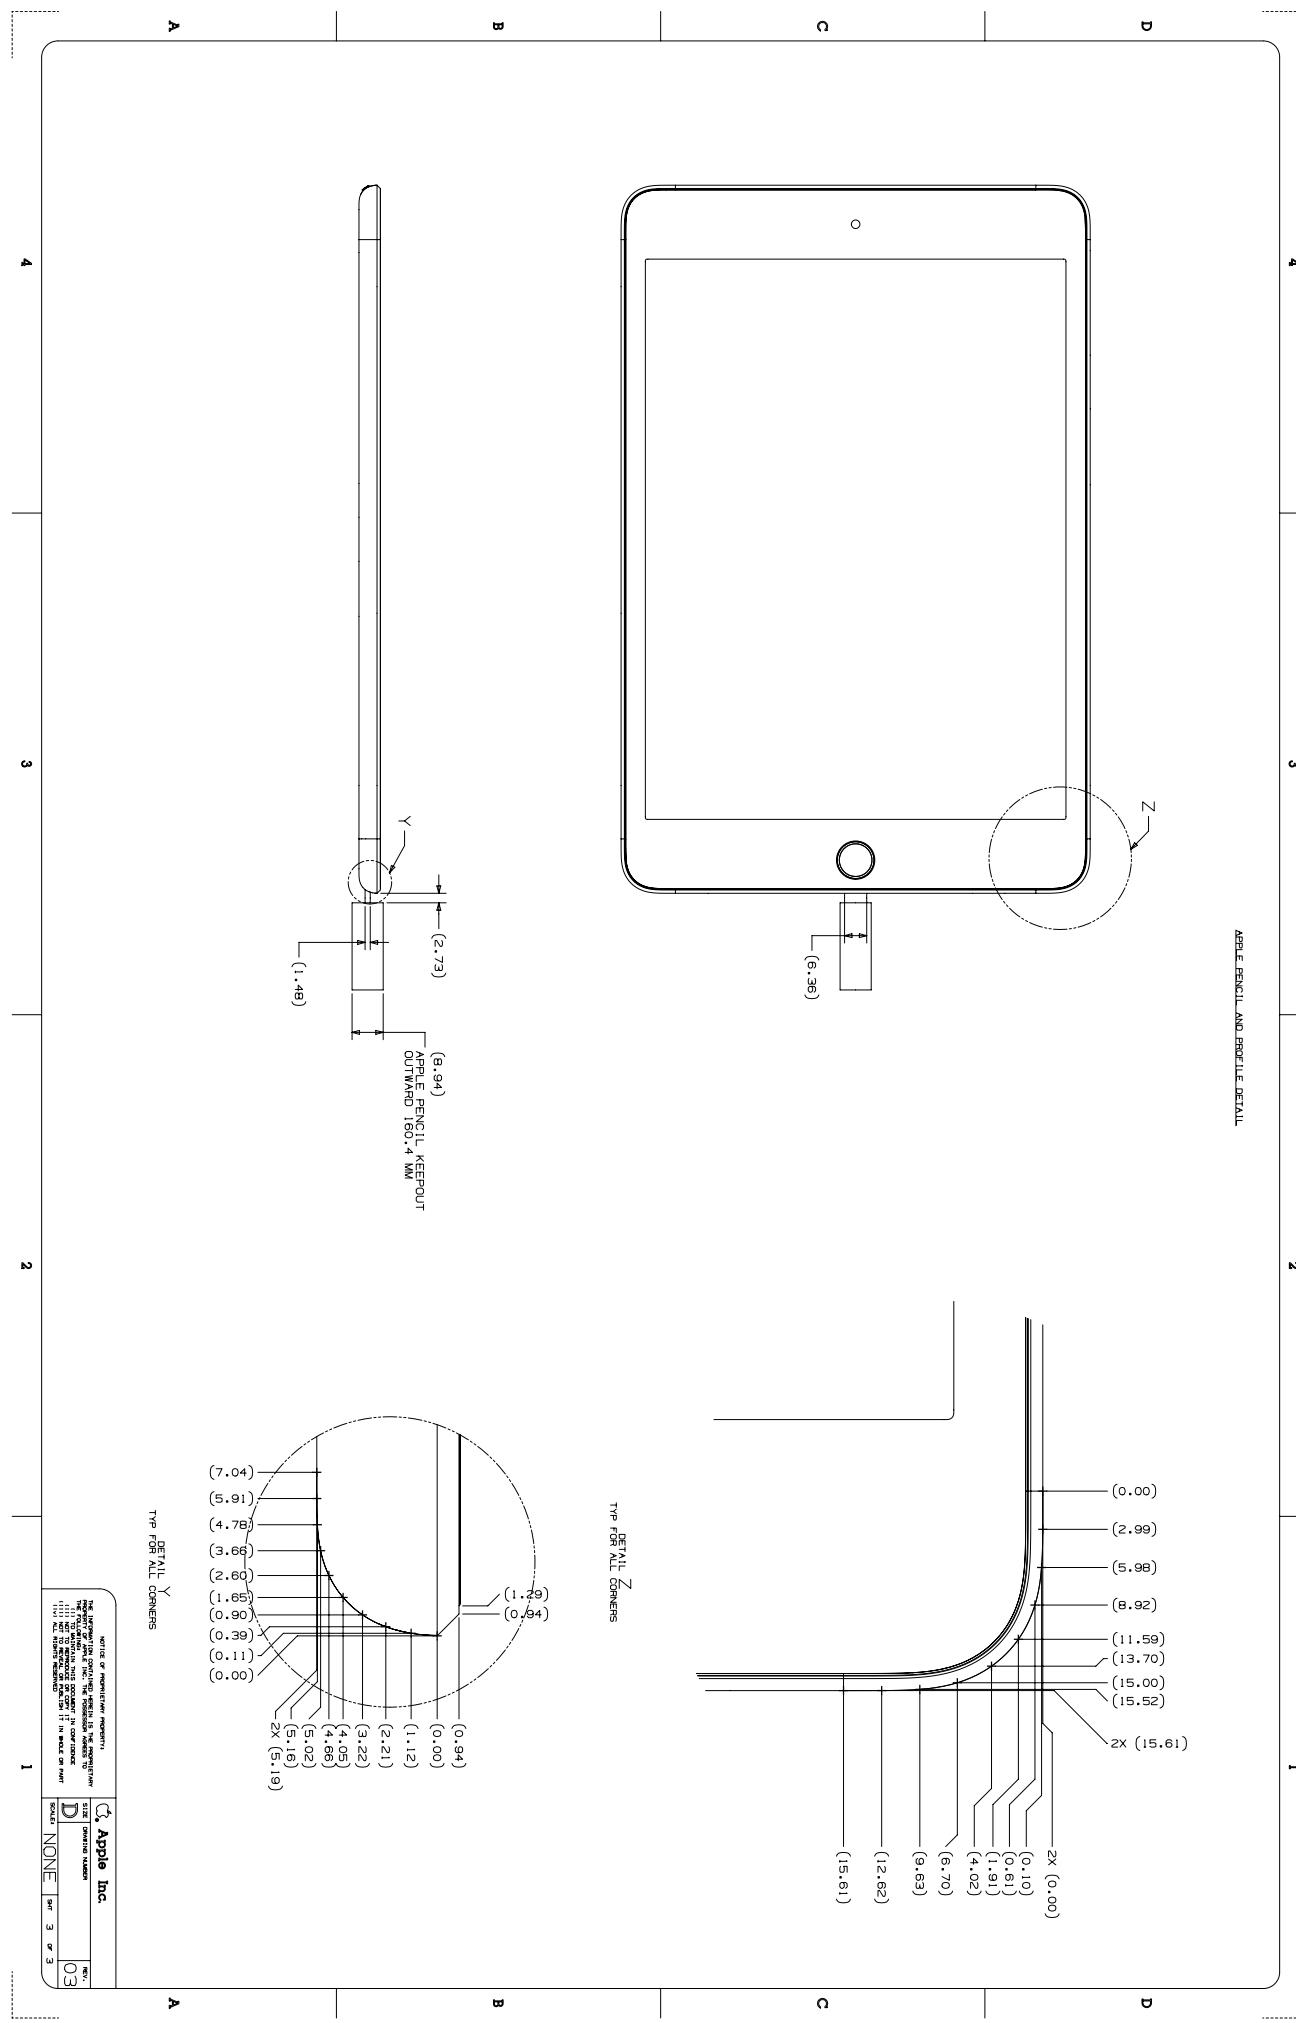

29.31 iPad mini (5th generation) with Wi-Fi + Cellular 1 of 3

**NOTES (UNLESS OTHERWISE SPECIFIED)**

- [1] ANTENNA KEEPOUT NO METAL CONTACT
- [2] DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, SPEAKERS.
- [3] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA.
- [4] ALS (AMBIENT LIGHT SENSOR).
- [5] DO NOT OBSTRUCT THE HOME BUTTON.
- [6] DO NOT TOUCH GLASS.

**AUDIO JACK (A) & ALS**

**FRONT CAMERA (FC)**

**REAR CAMERA (RC)**

**SIDE MIC (SM)**

**ANTENNA (ANT)**

**POWER BUTTON**

**REAR MIC (RM)**

**REAR CAM (RC)**


**HOME BUTTON (HB)**

**METRIC**


METRIC	Apple Inc.
DATE	03/18/19
REVISED DATE	03/18/19
APPL TO	iPad mini (5th generation)
APPL ID	033189
DESCRIPTION	iPad mini (5th generation) Wi-Fi + Cellular Dimensions in millimeters
TO/BY	None
REV	03
NOTE	Do not scale drawings

29.32 iPad mini (5th generation) with Wi-Fi + Cellular 2 of 3

COVER FLAP MAGNET DETAIL  
POLARITY SHOWN NORMAL TO GLASS  
DIMENSIONS TO CENTER OF PRODUCT  
"N" = NORTH

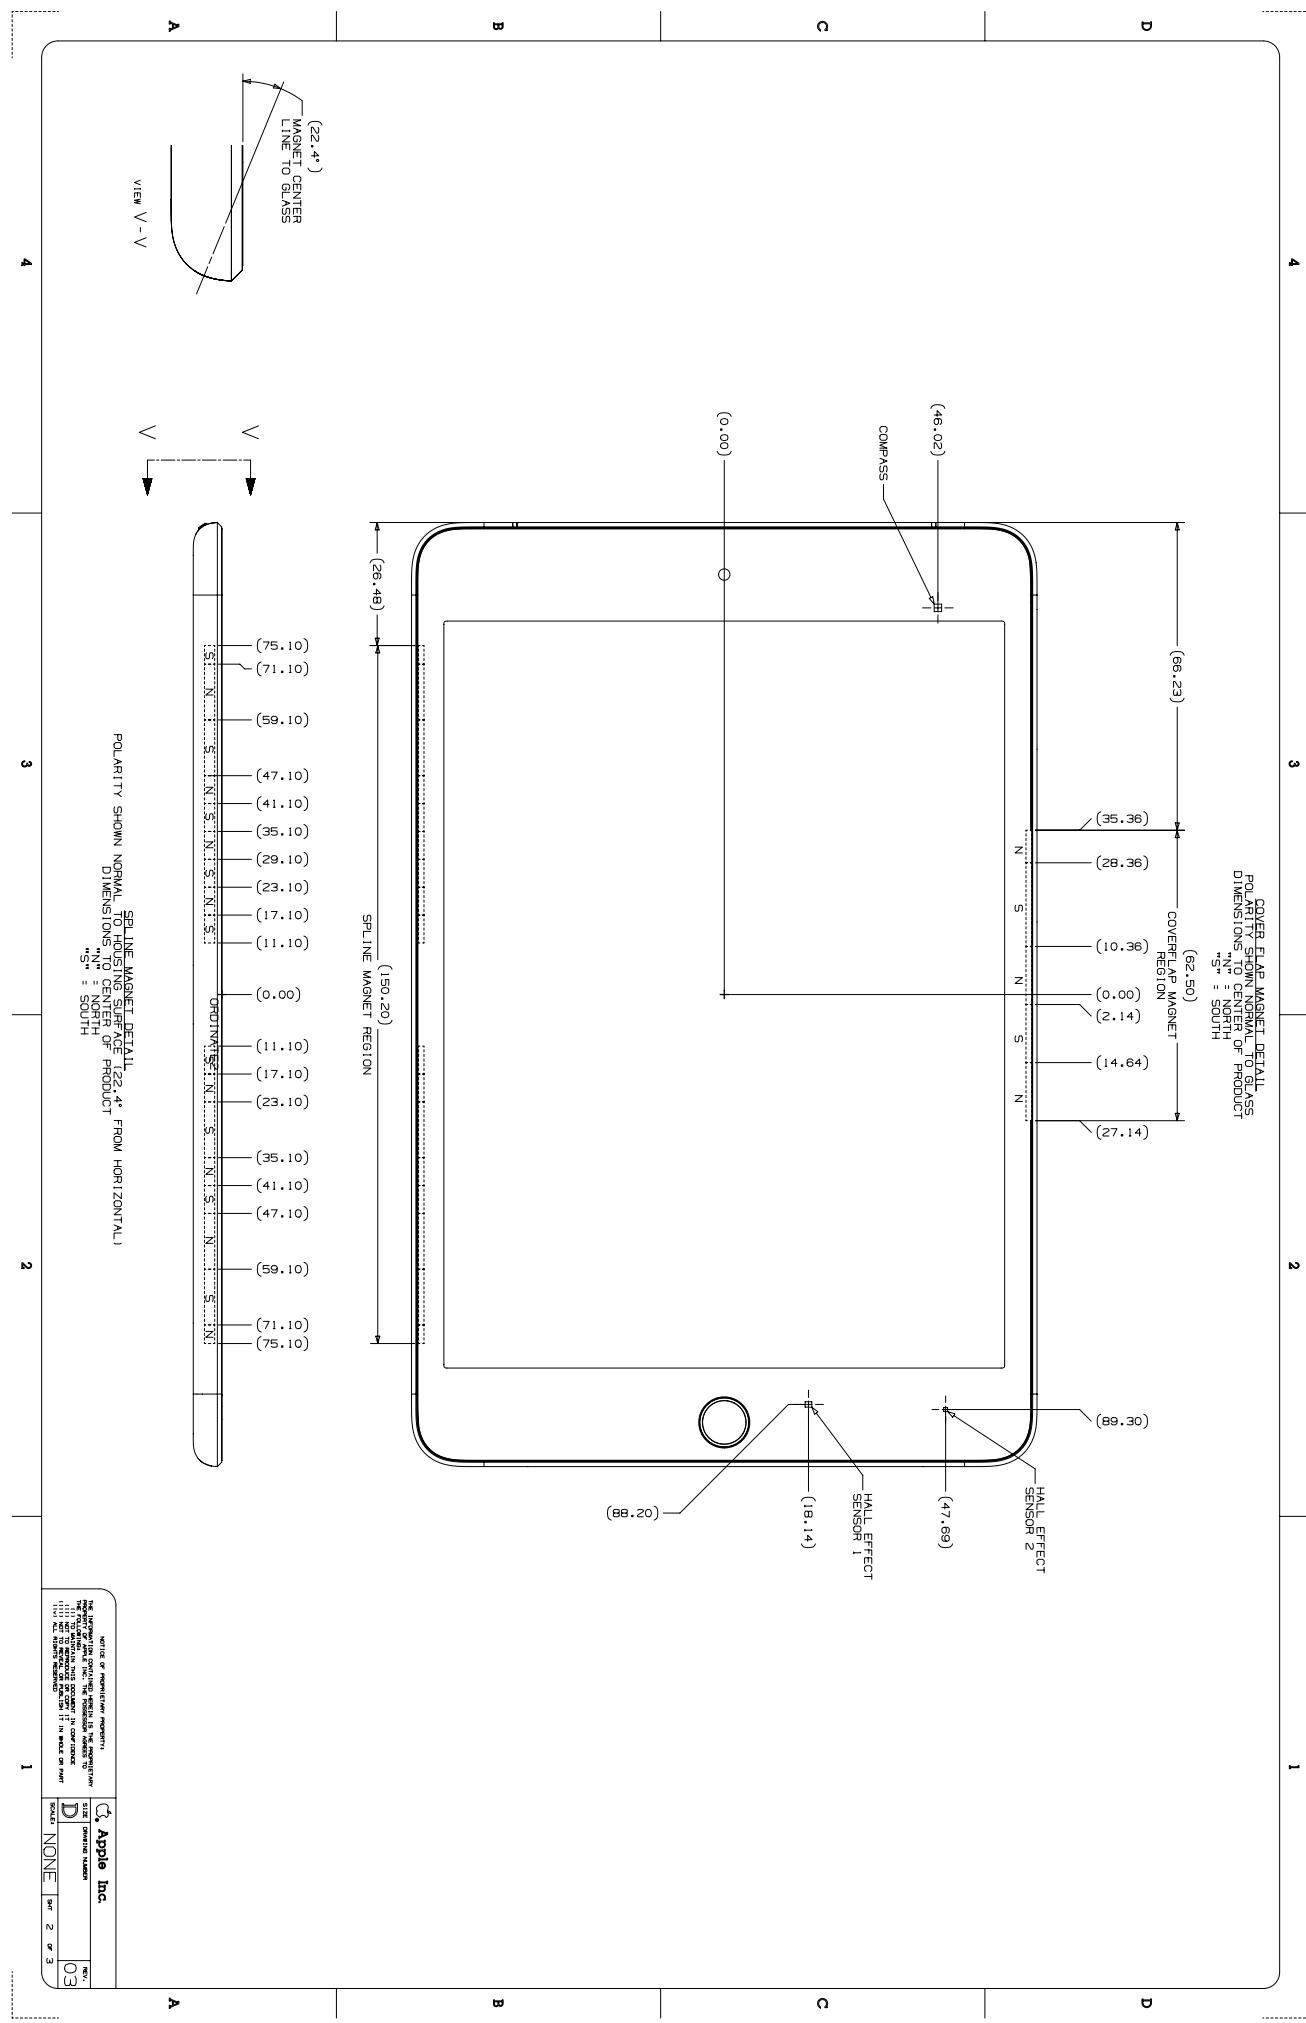





29.33 iPad mini (5th generation) with Wi-Fi + Cellular 3 of 3

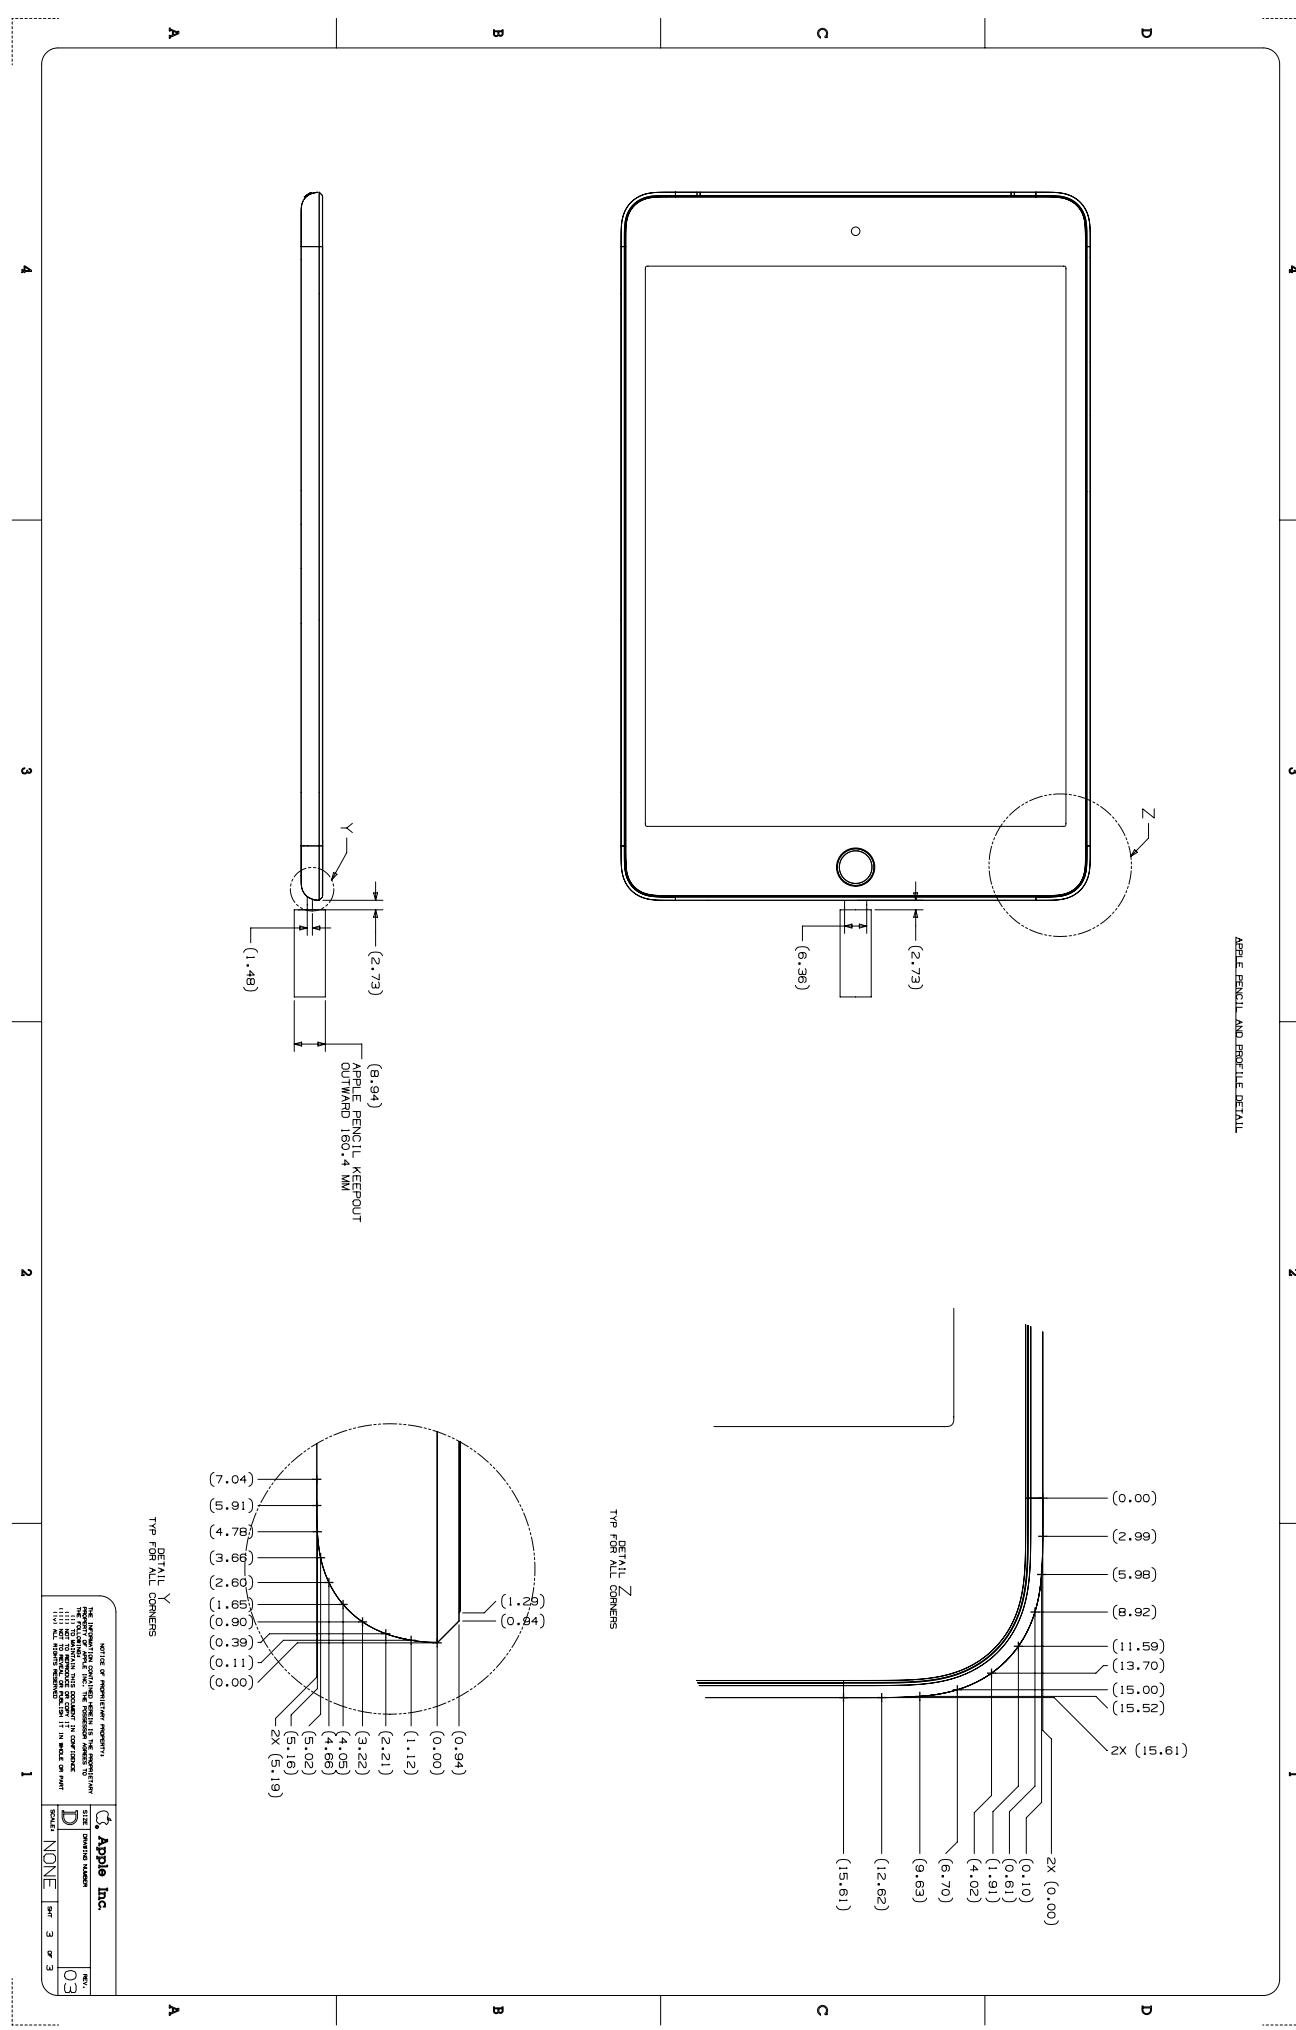

## 29.34 iPad Pro (12.9-inch) 3rd Generation 1 of 3


**NOTES** (UNLESS OTHERWISE SPECIFIED)  
[1] DO NOT OBSTRUCT ACOUSTIC OPENINGS: REAR MIC, SIDE MICs, FRONT MIC, SPEAKERS

- 2 DO NOT OBSTRUCT REAR CAMERA & REAR FLASH
  - 3 DO NOT OBSTRUCT AMBIENT LIGHT SENSOR
  - 4 DO NOT OBSTRUCT IR CAMERA, FLOOD ILLUMINATOR, FRONT CAMERA & DOT PROJECTOR
  - 5 DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS

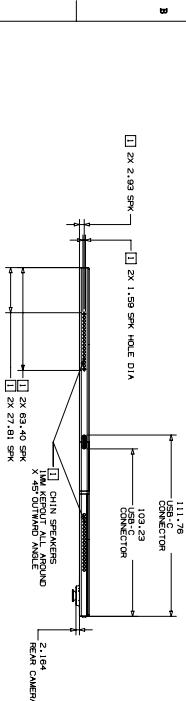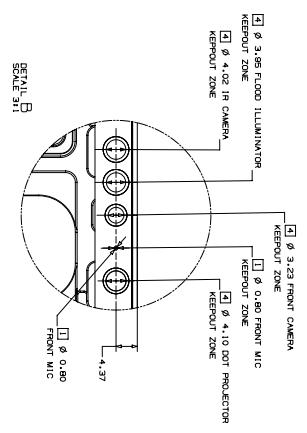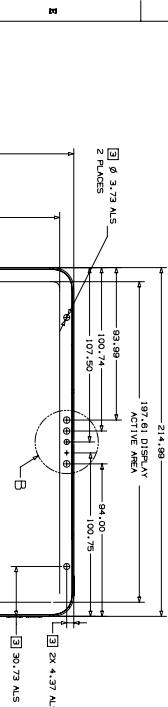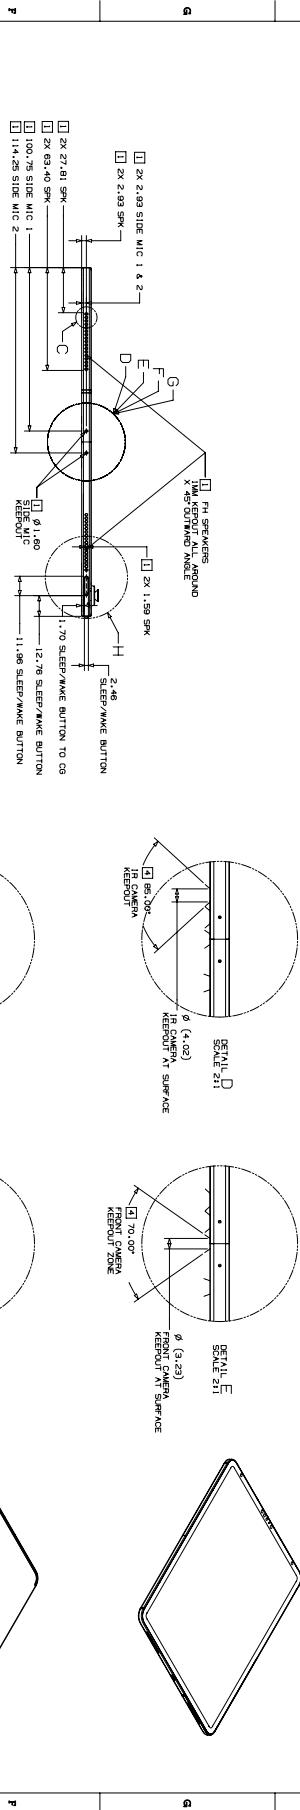


29.35 iPad Pro (12.9-inch) 3rd Generation 2 of 3

- 1 DO NOT OBSTRUCT ACOUSTIC OPENINGS! REAR MIC, SIDE MICS, FRONT MIC, SPEAKERS
- 2 DO NOT OBSTRUCT REAR CAMERA & REAR FLASH
- 3 DO NOT OBSTRUCT AMBIENT LIGHT SENSOR
- 4 DO NOT OBSTRUCT IR CAMERA, FLOOD ILLUMINATOR, FRONT CAMERA & DOT PROJECTOR

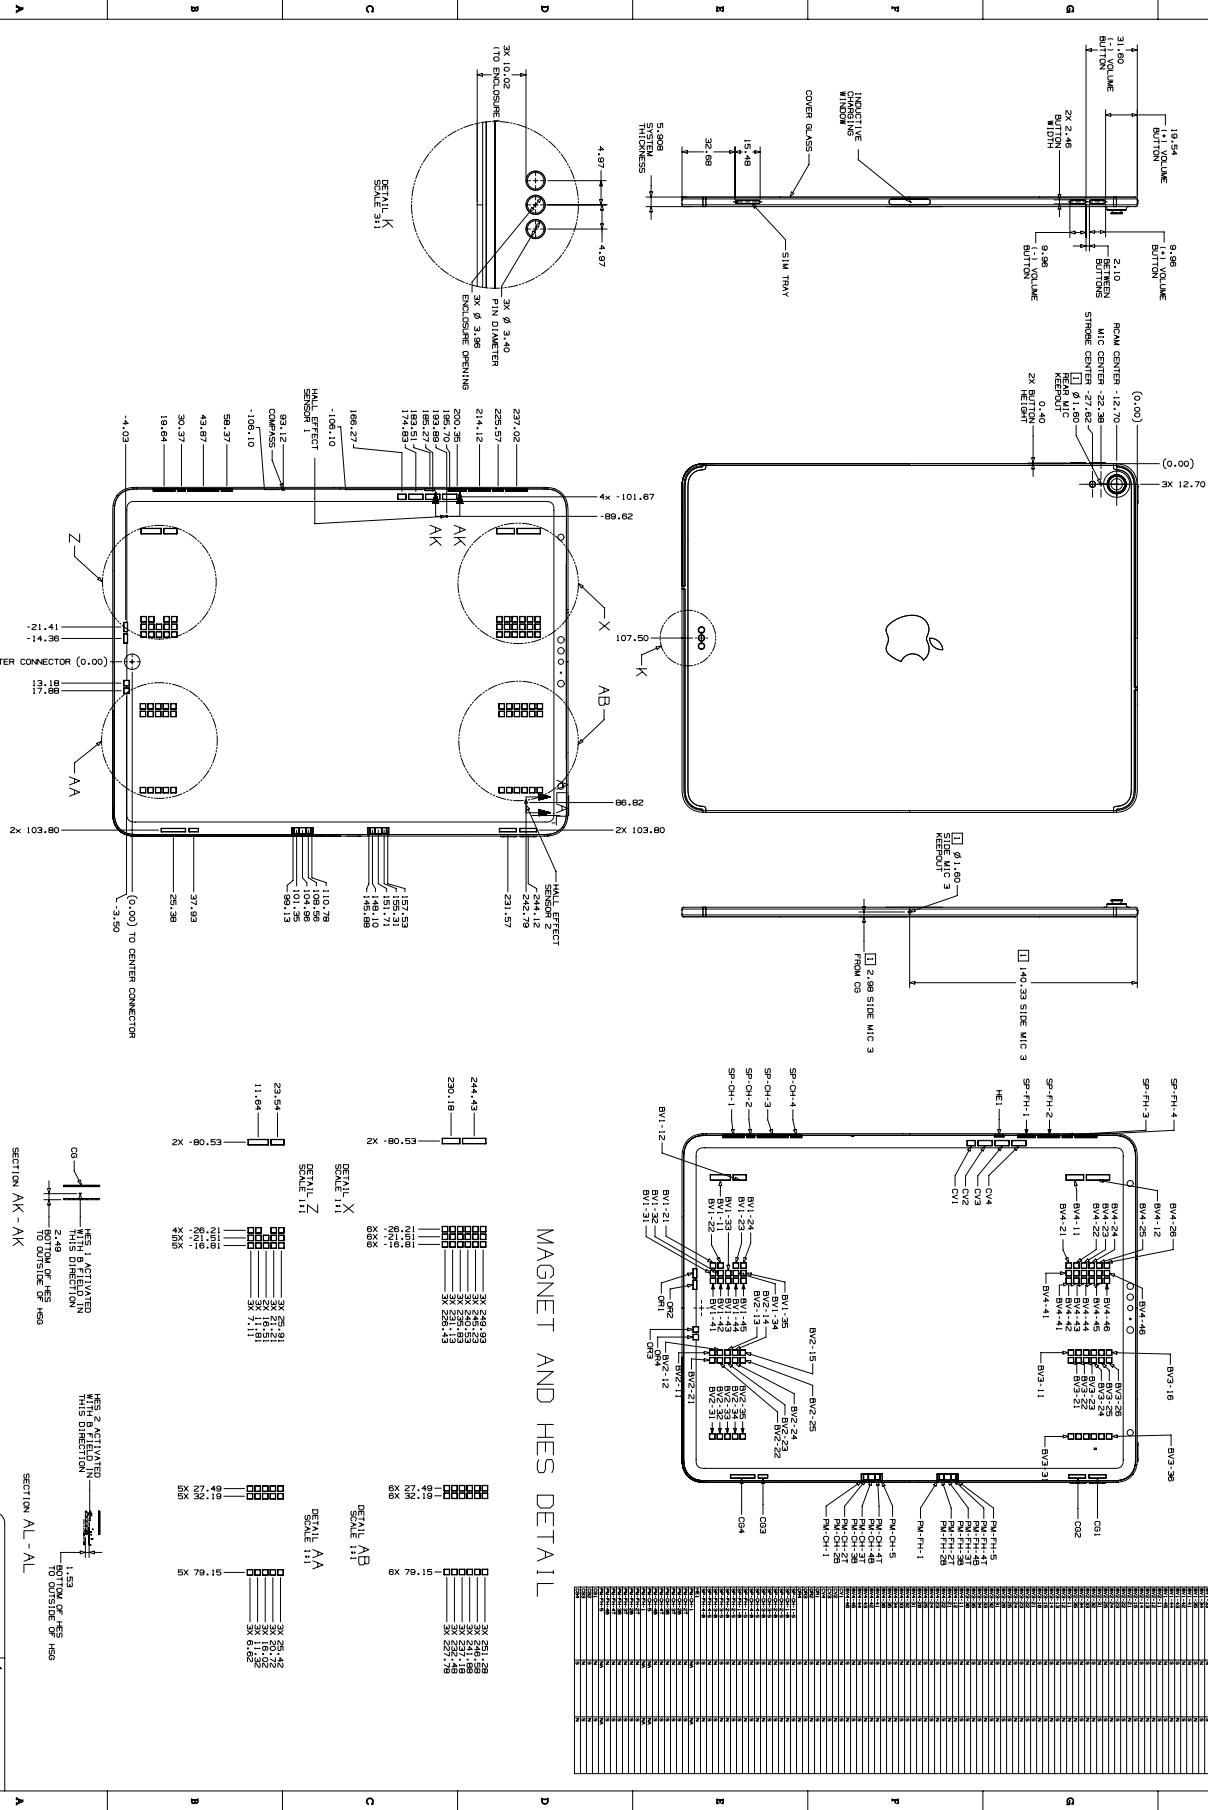

29.36 iPad Pro (12.9-inch) 3rd Generation 3 of 3


## SECTION AND DETAIL INFORMATION

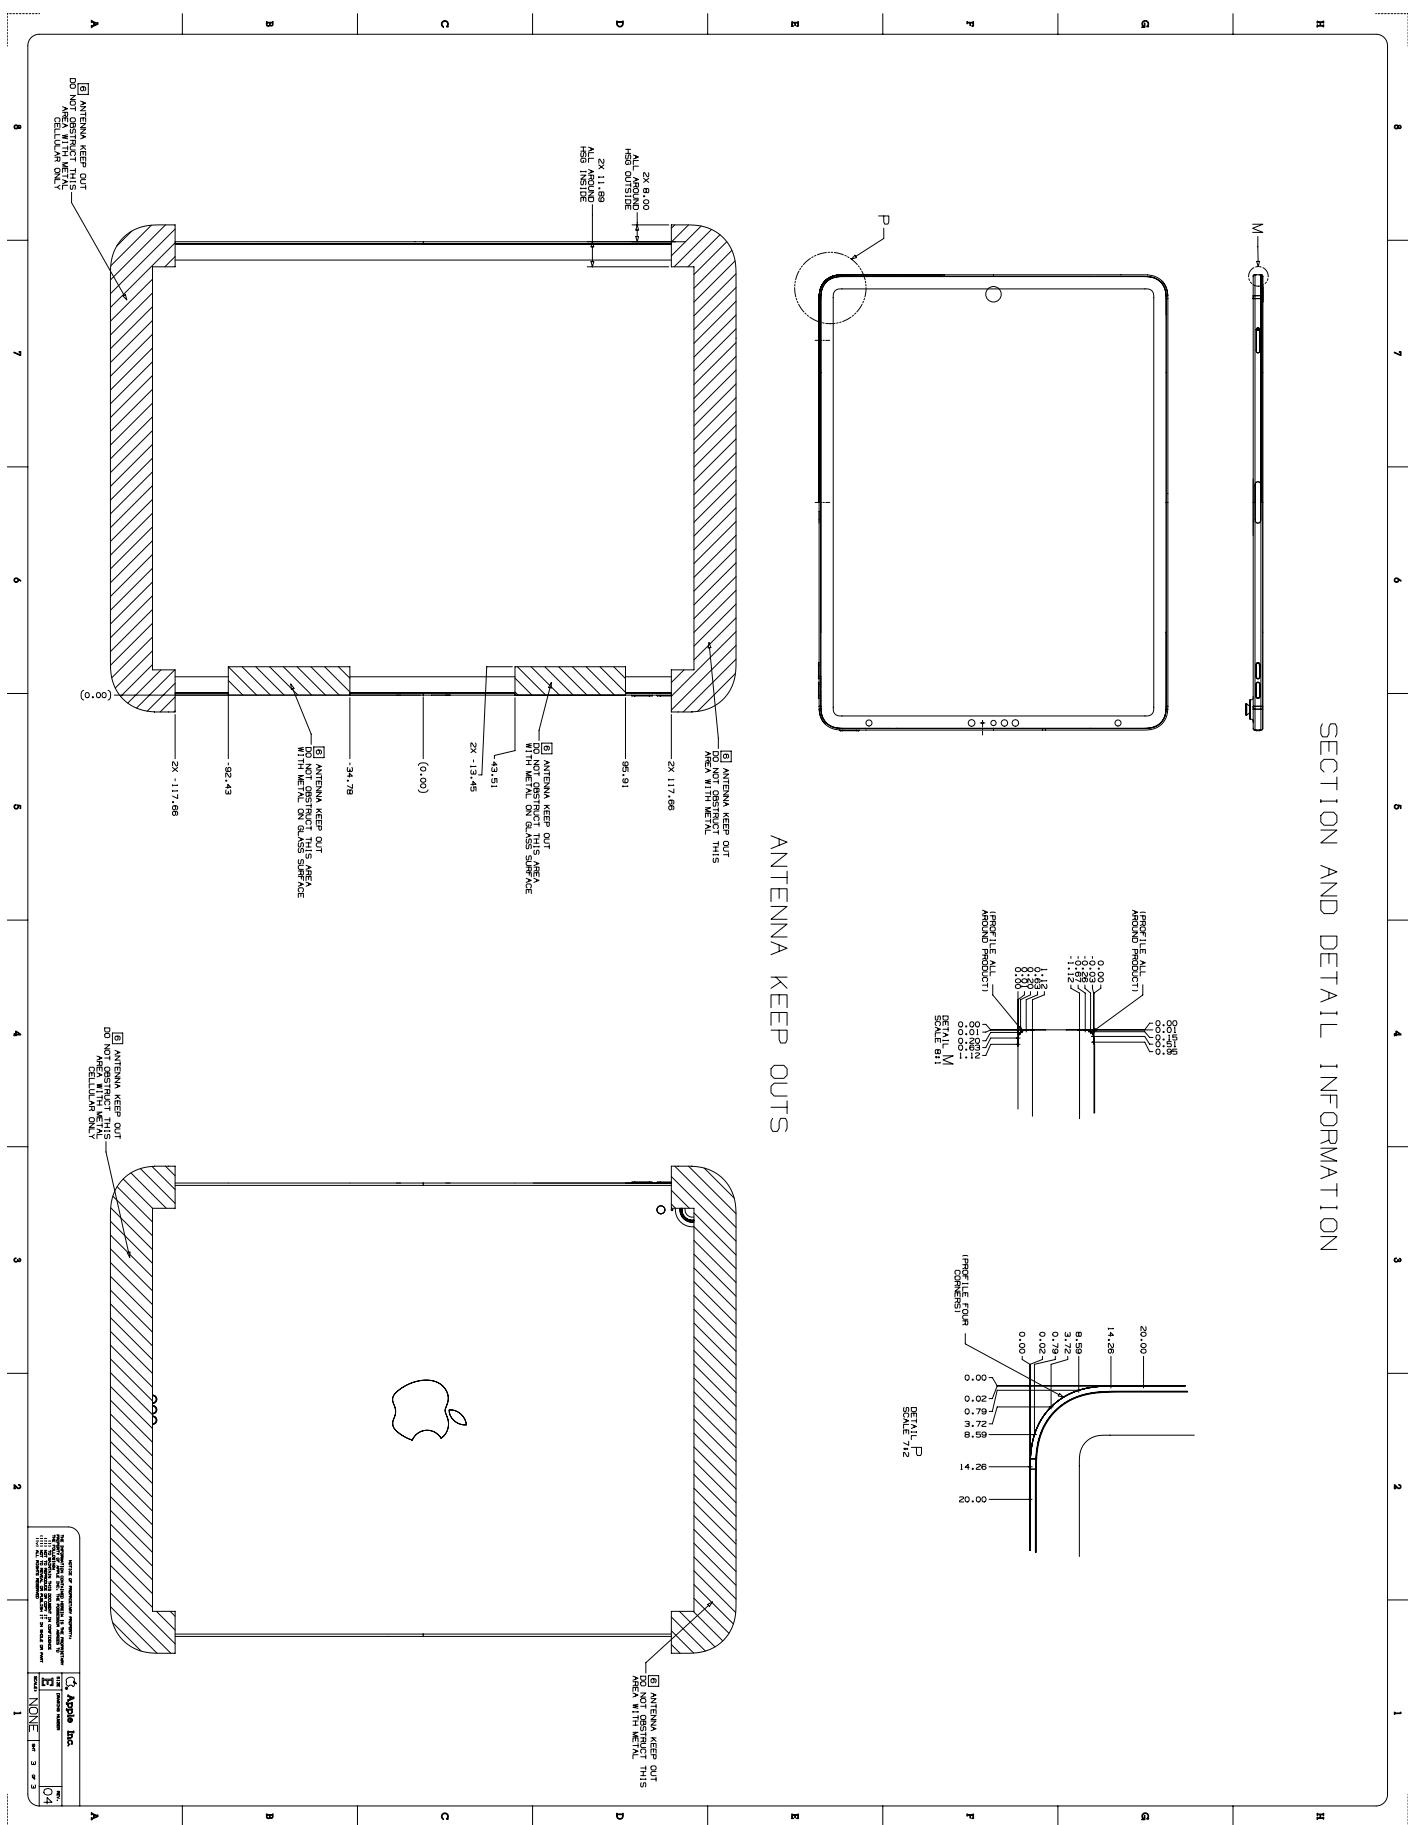

29.37 iPad Pro (11-inch) 1 of 3

**NOTES** (UNLESS OTHERWISE SPECIFIED)  
□ DO NOT OBSTRUCT ACOUSTIC OPENINGS

- [3] DO NOT OBSTRUCT AMBIENT LIGHT SENSOR**
- [4] DO NOT OBSTRUCT IR CAMERA, FLOOD ILLUMINATOR, FRONT CAMERA & DOT PROJECTOR**
- [5] DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS**

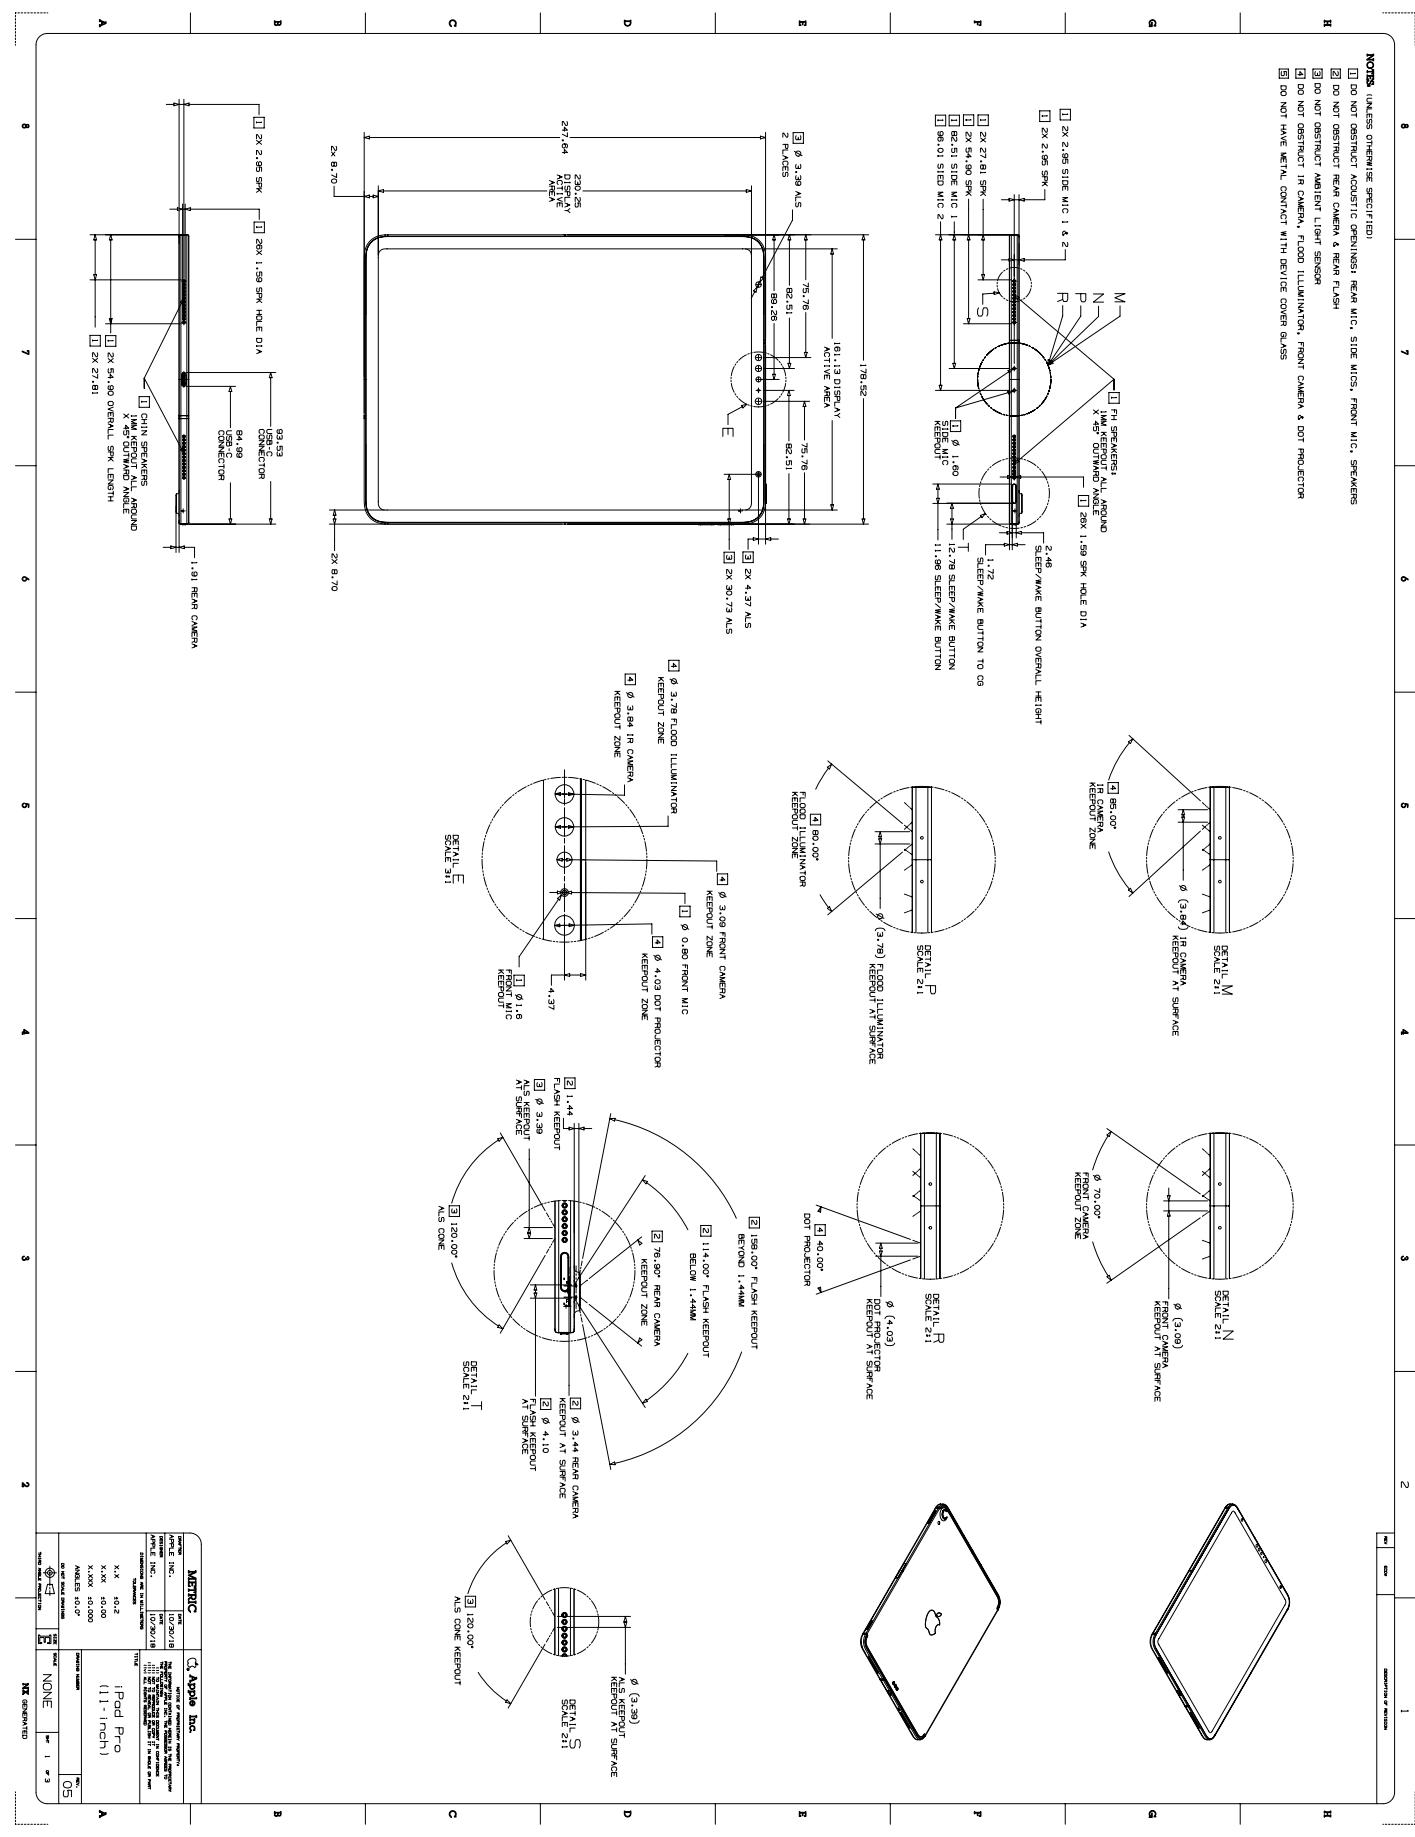


# 29.38 iPad Pro (11-inch) 2 of 3


NOTES (UNLESS OTHERWISE SPECIFIED)

- ① DO NOT OBSTRUCT ACOUSTIC OPENINGS; REAR MIC, SIDE MICs, FRONT MIC, SPEAKERS
- ② DO NOT OBSTRUCT REAR CAMERA & REAR FLASH
- ③ DO NOT OBSTRUCT IR CAMERA, FLUO. ILLUMINATOR, FRONT CAMERA & DOT PROJECTOR
- ④ DO NOT OBSTRUCT IR CAMERA, FLUO. ILLUMINATOR, FRONT CAMERA & DOT PROJECTOR
- ⑤ DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS


R

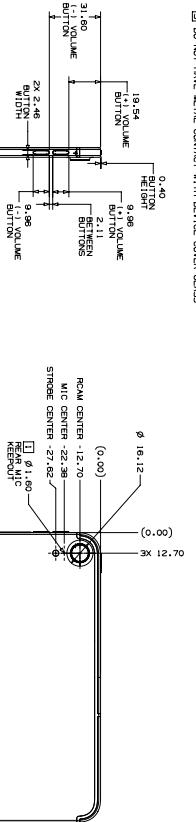



MAGNETS POLARITY

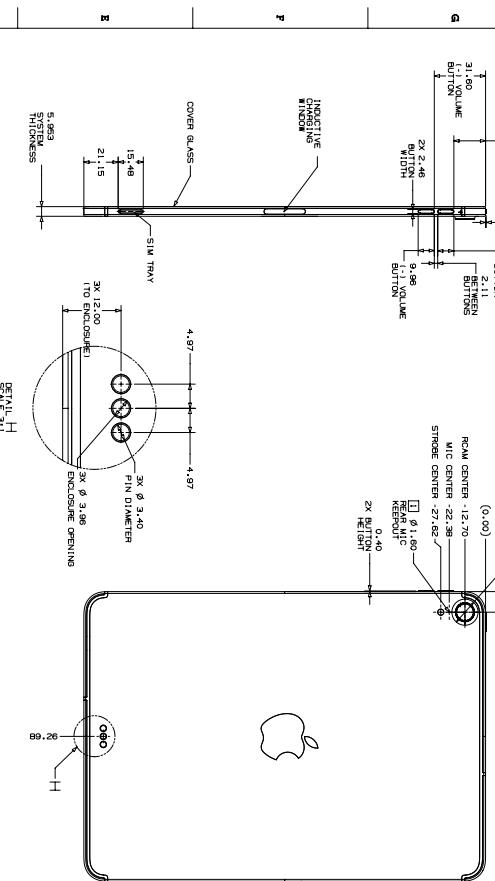



MAGNET AND HES DETAIL

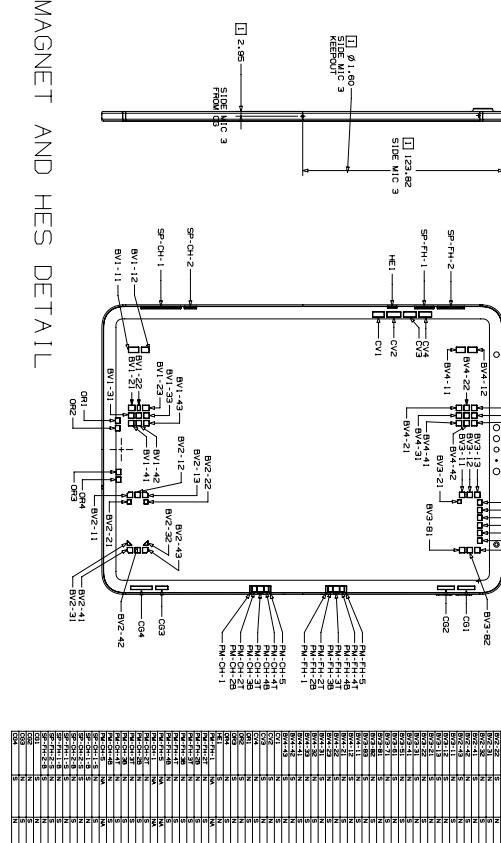






















































































































































DETAIL SCALE A<sub>1</sub>

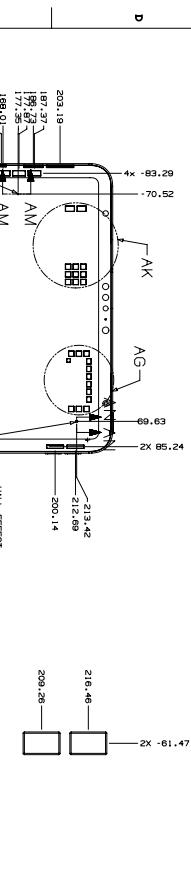


DETAIL SCALE A<sub>1</sub>

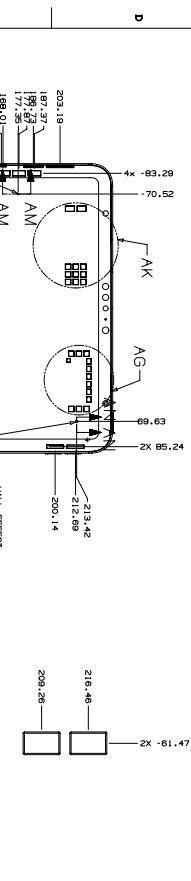


DETAIL SCALE A<sub>1</sub>

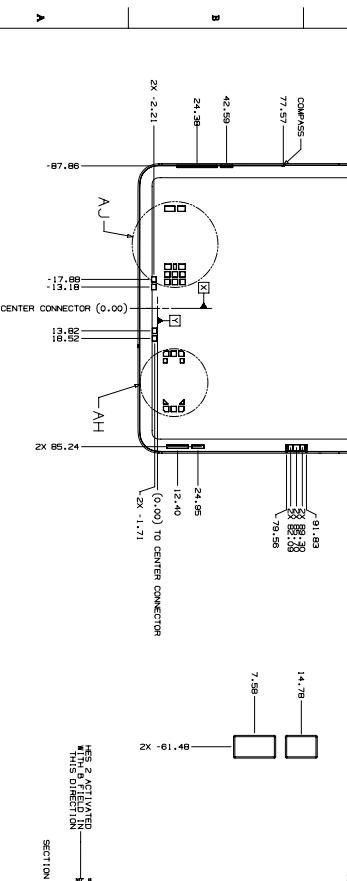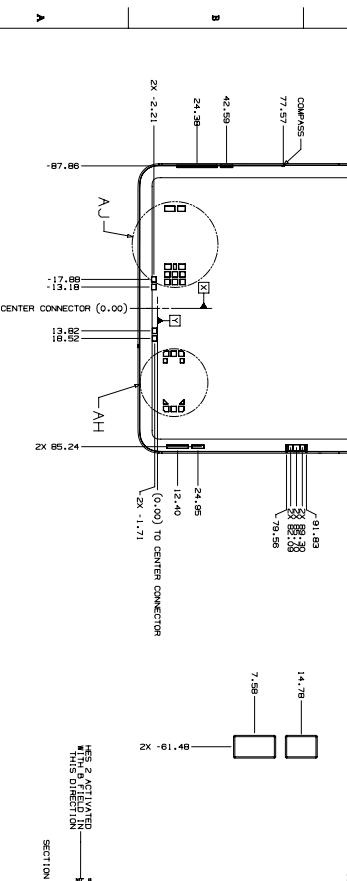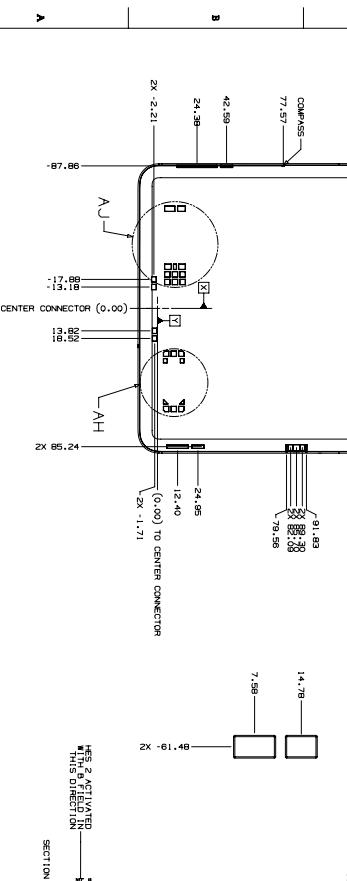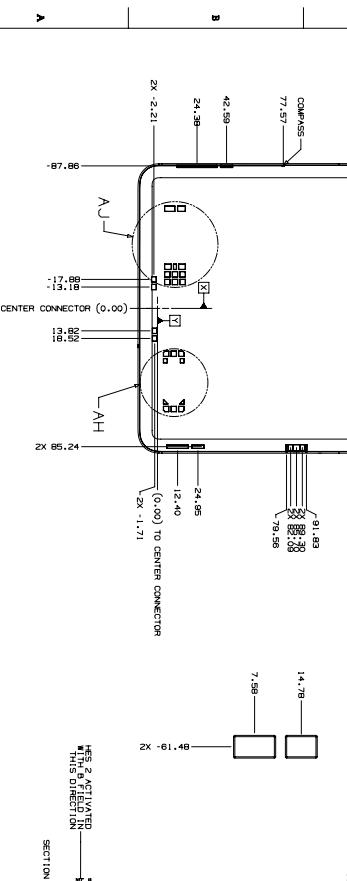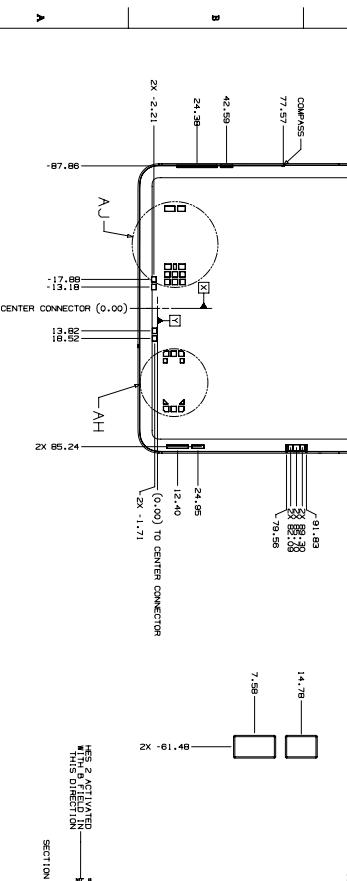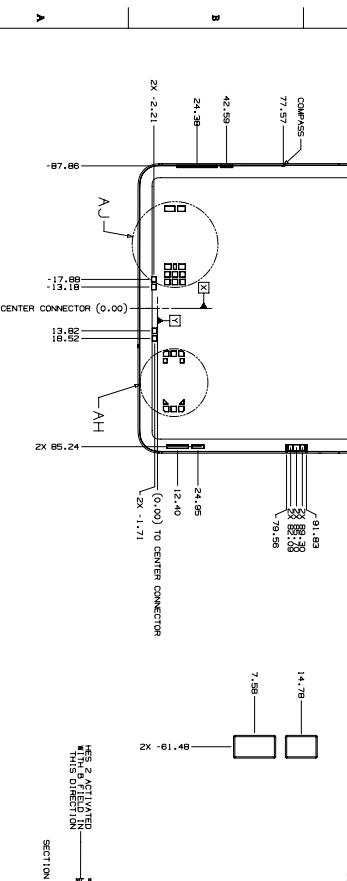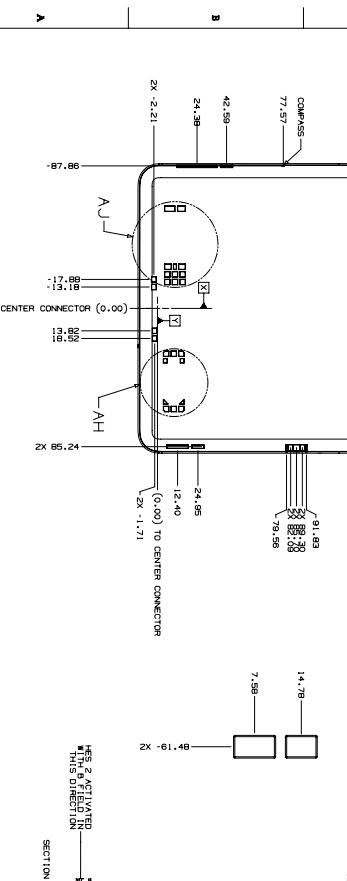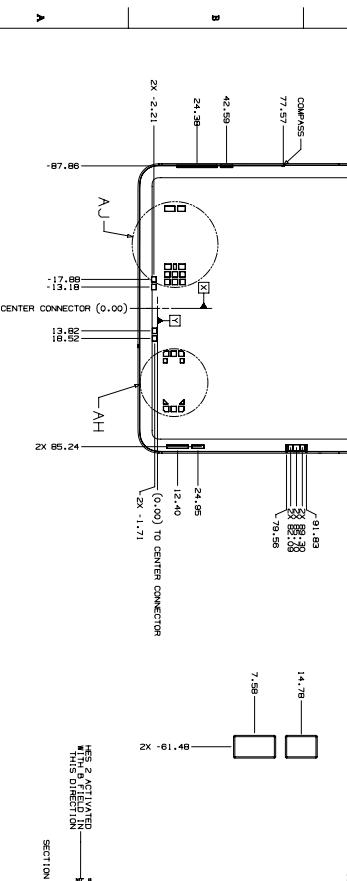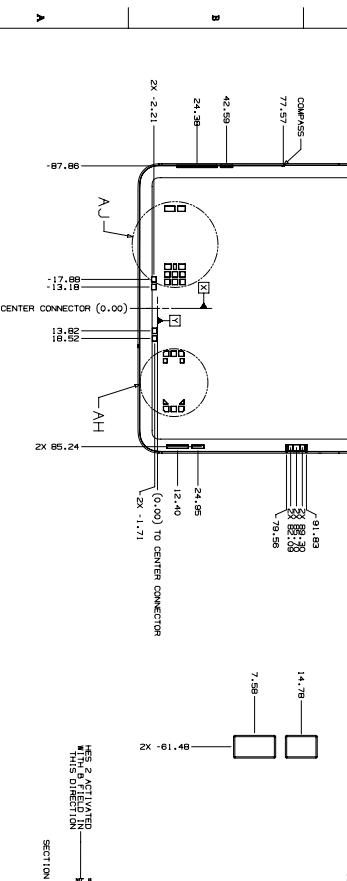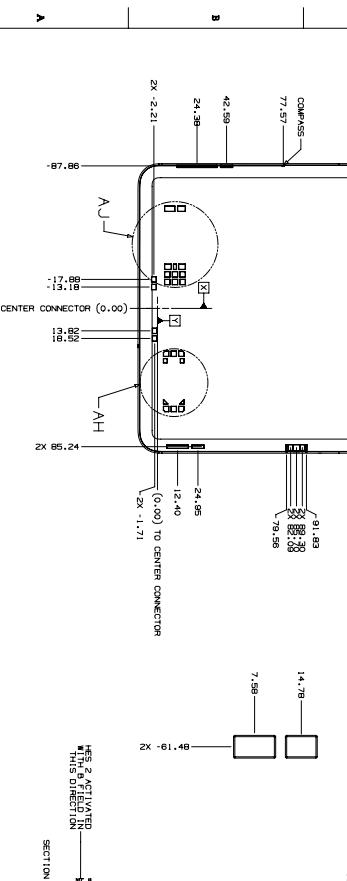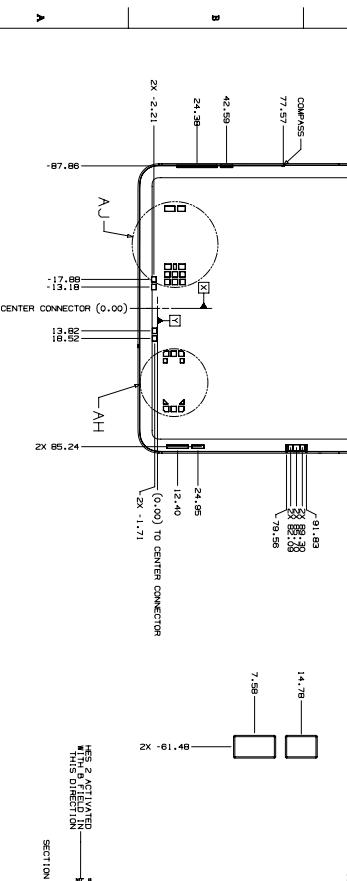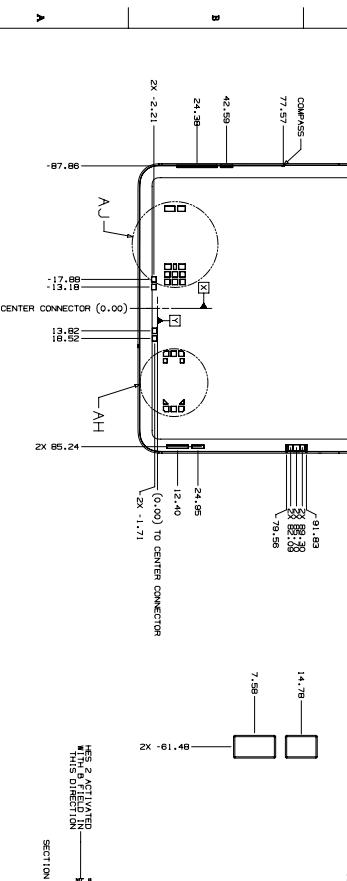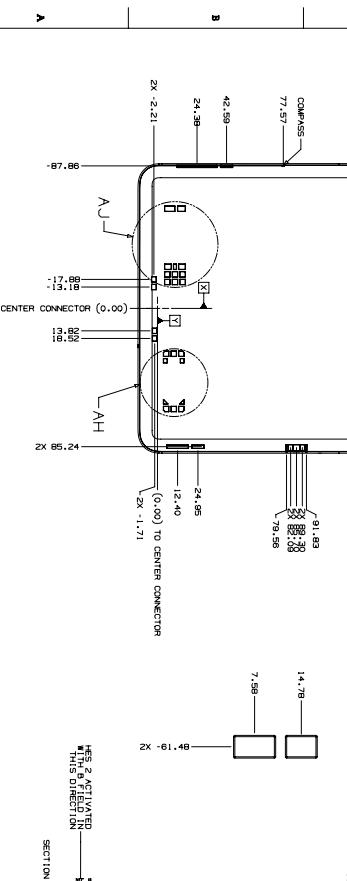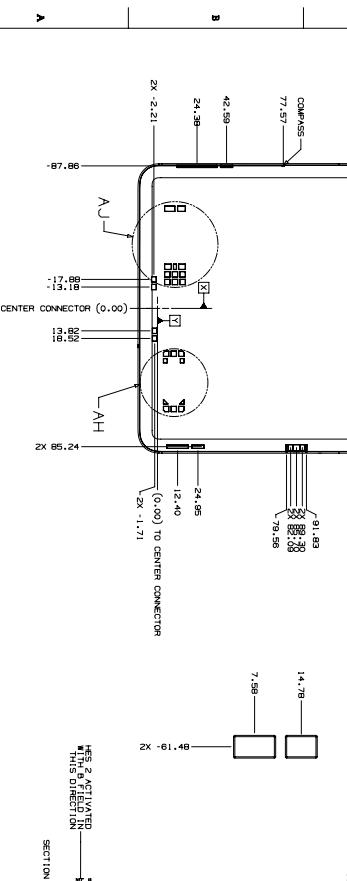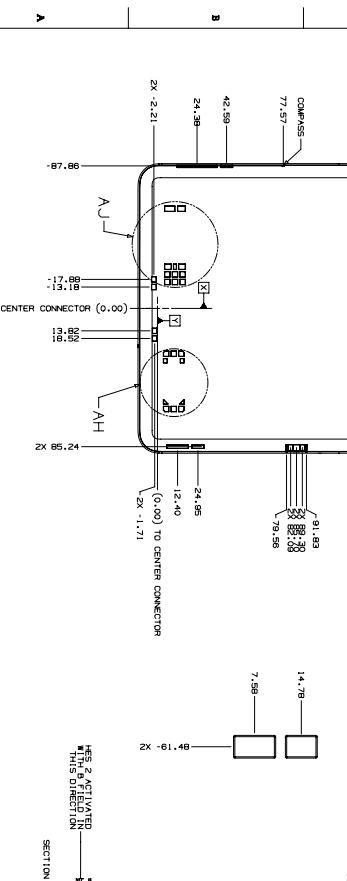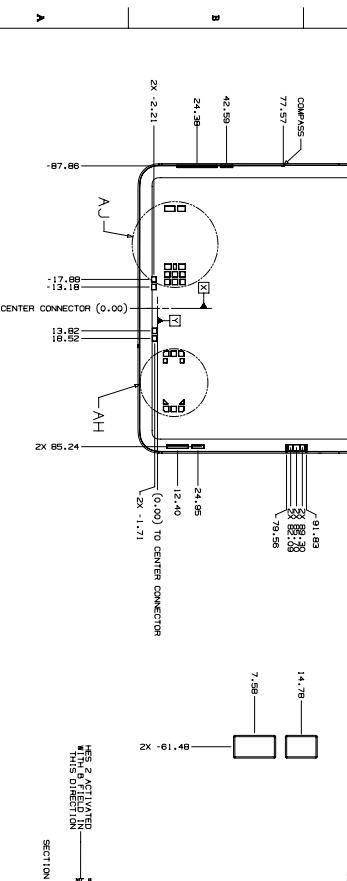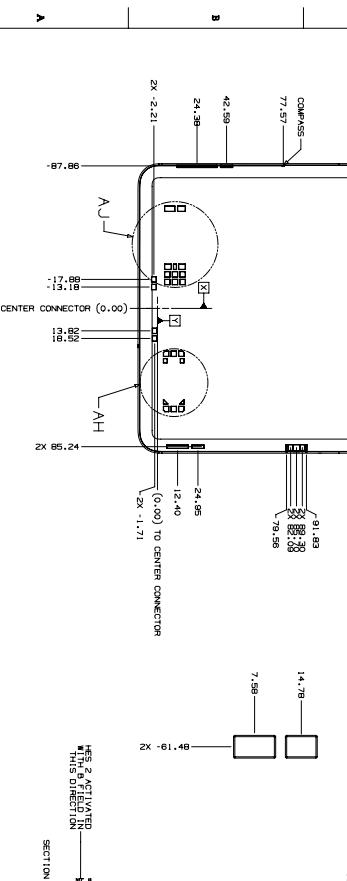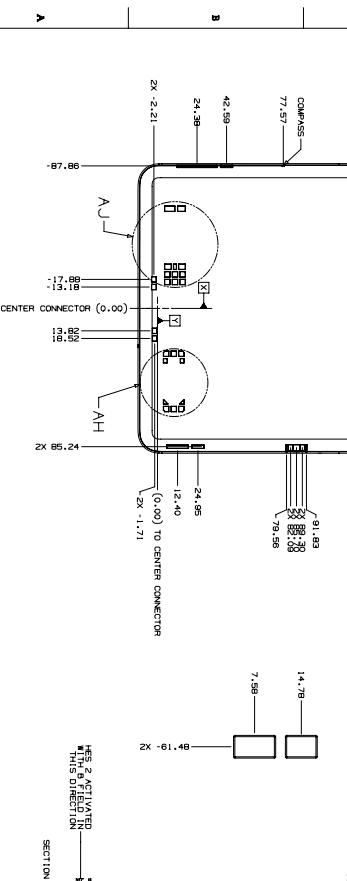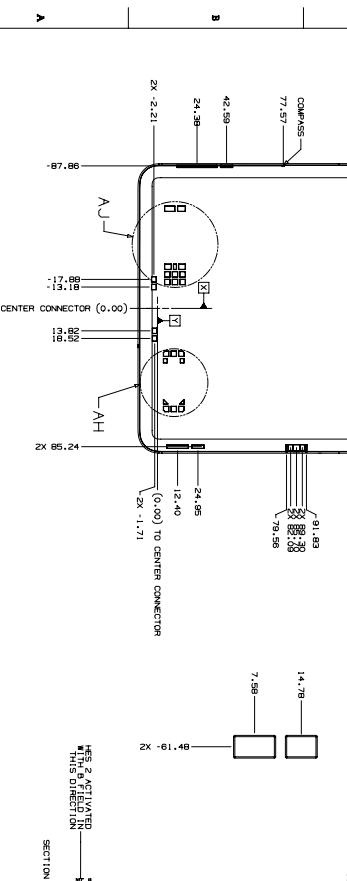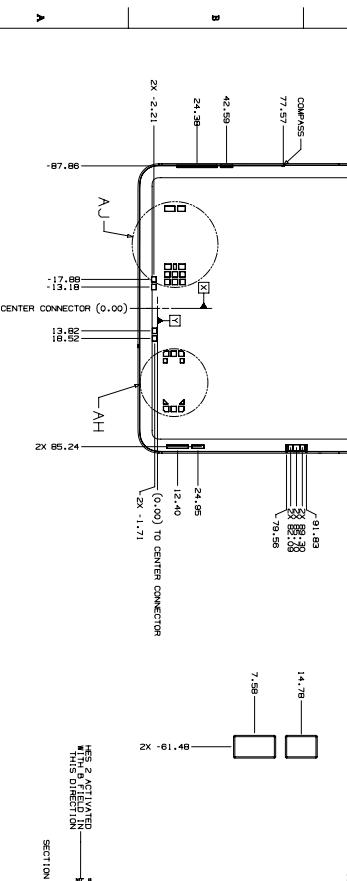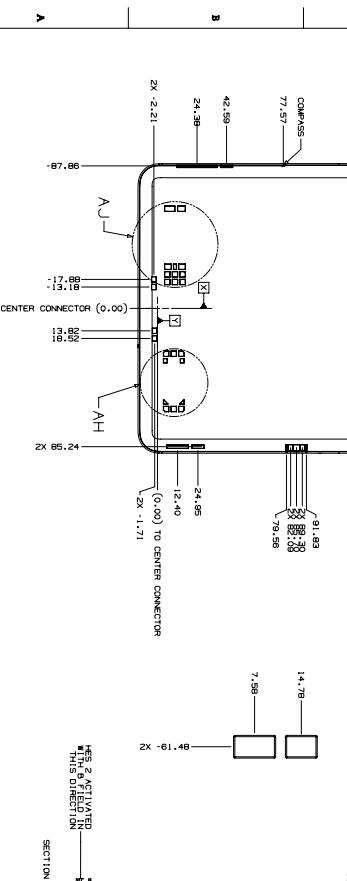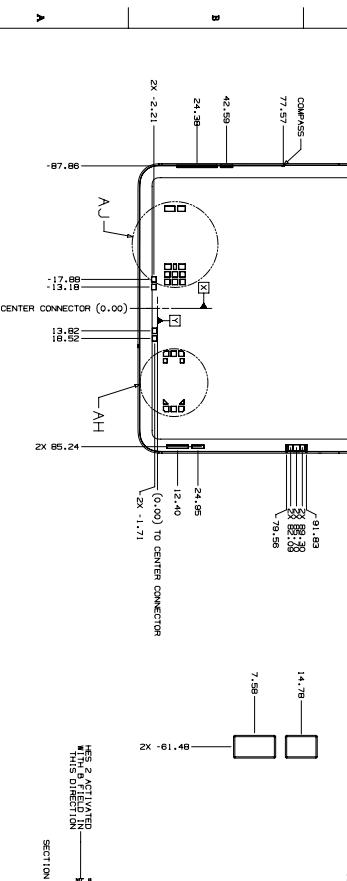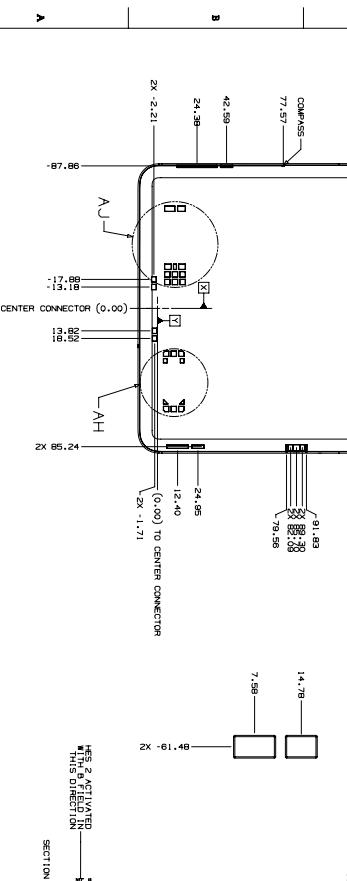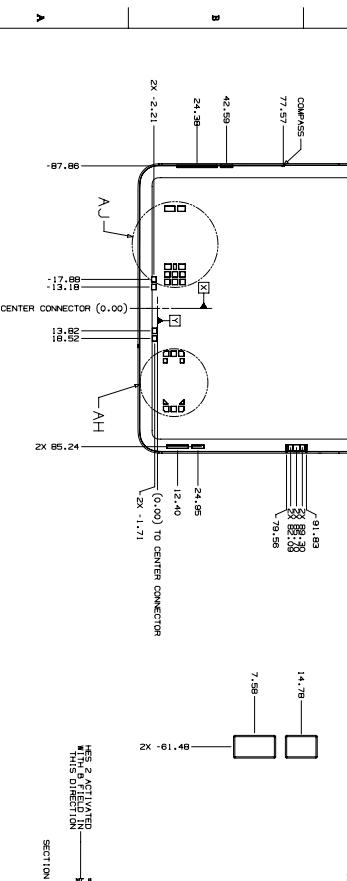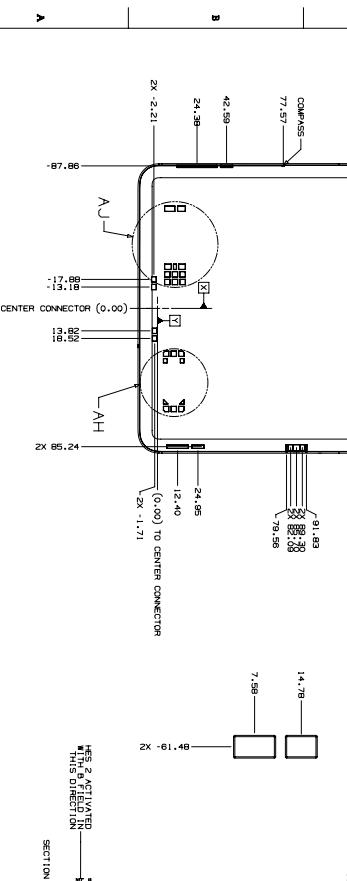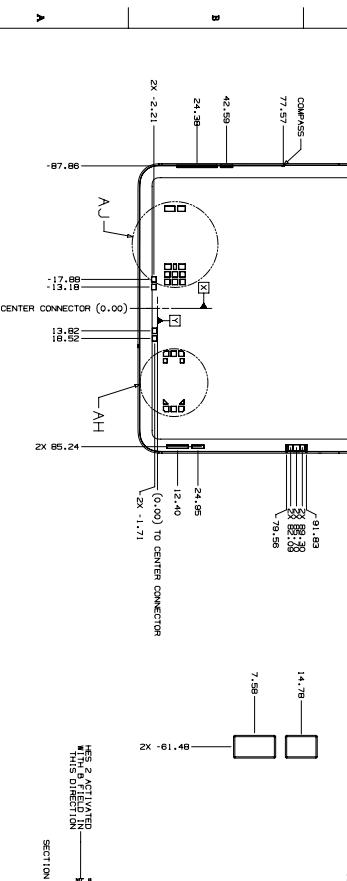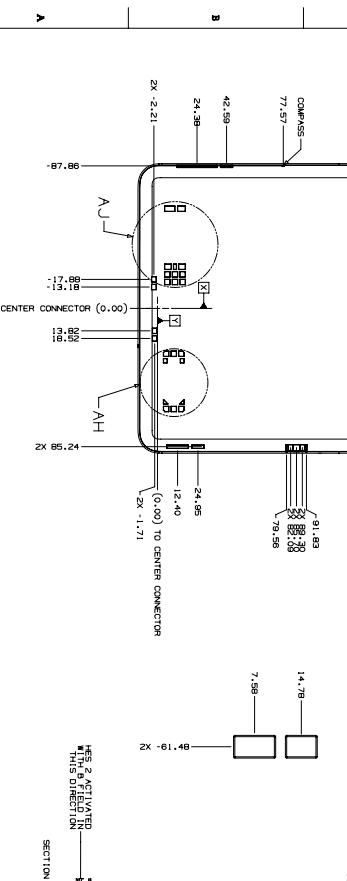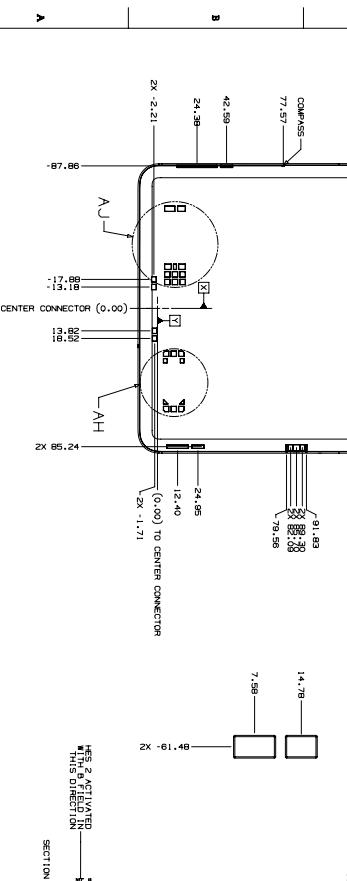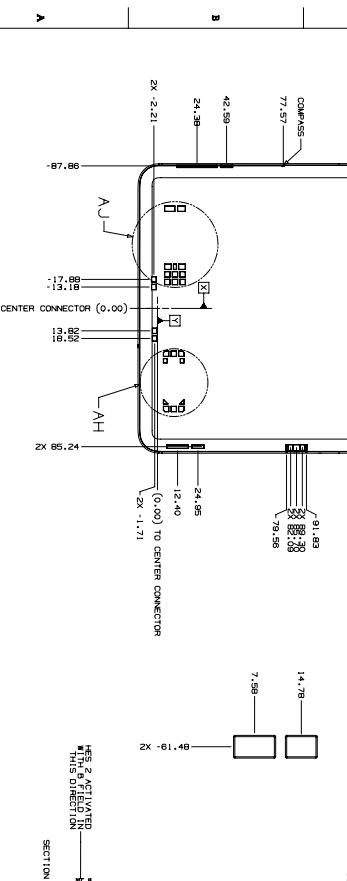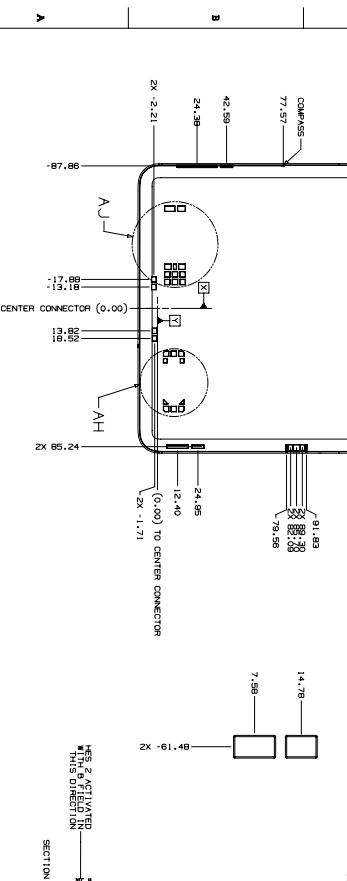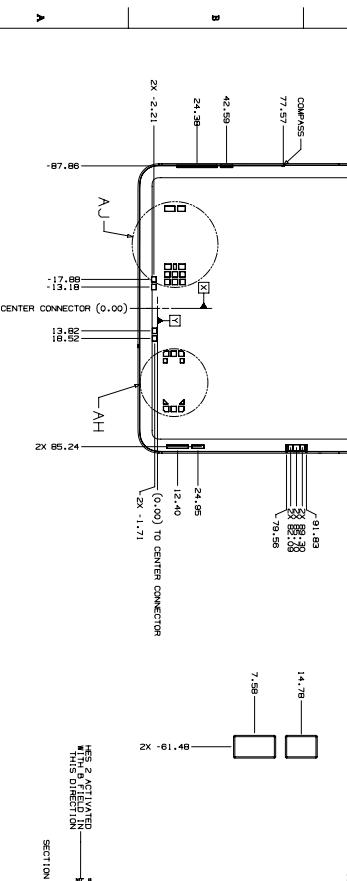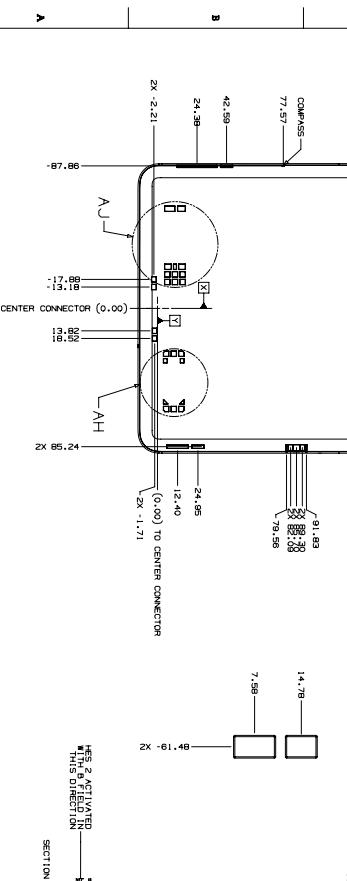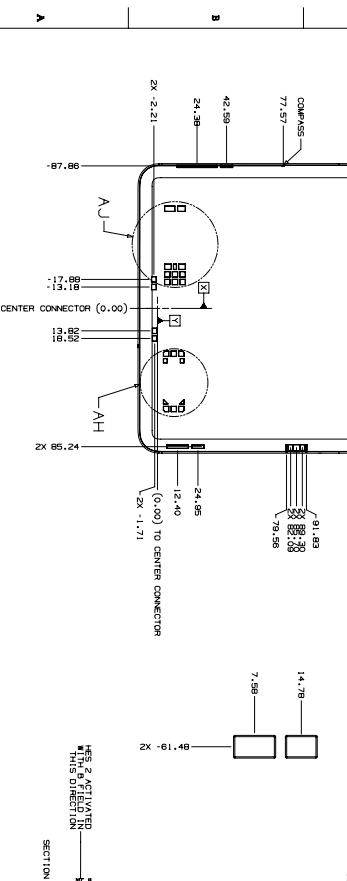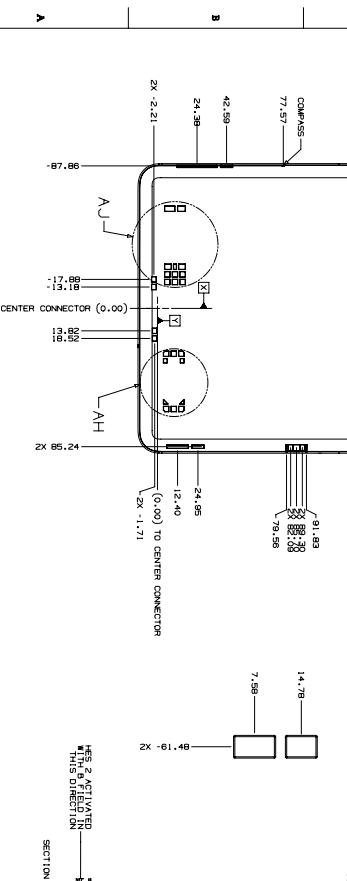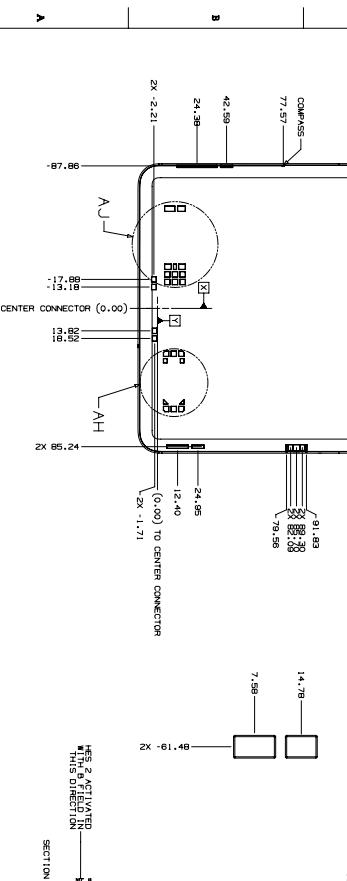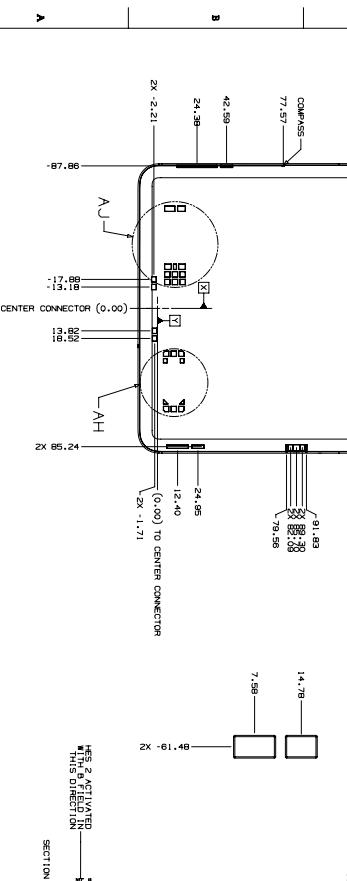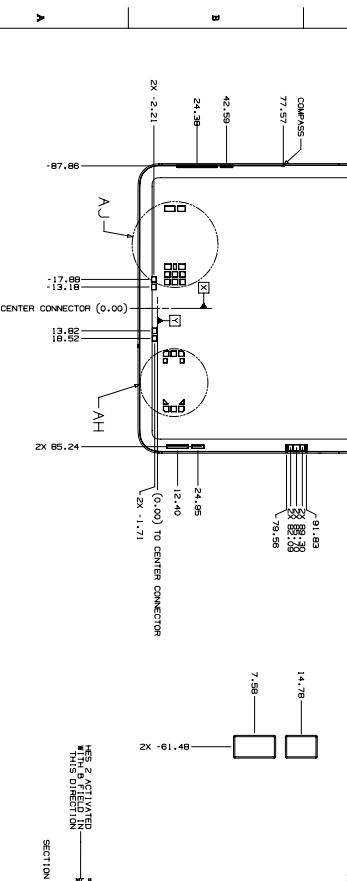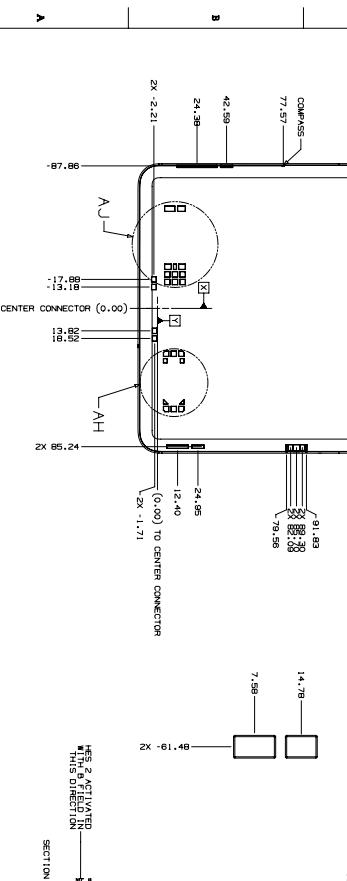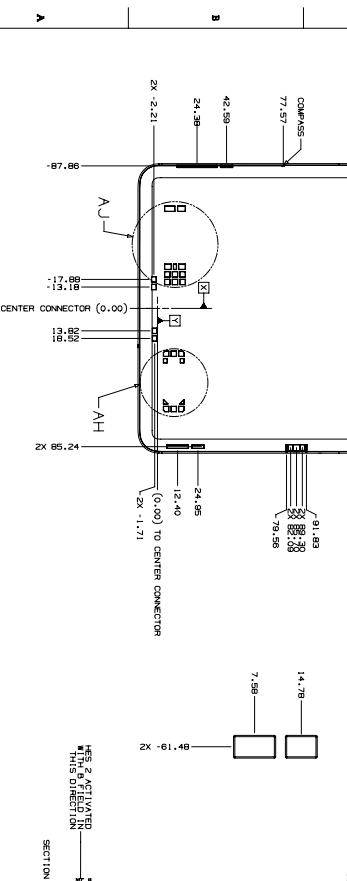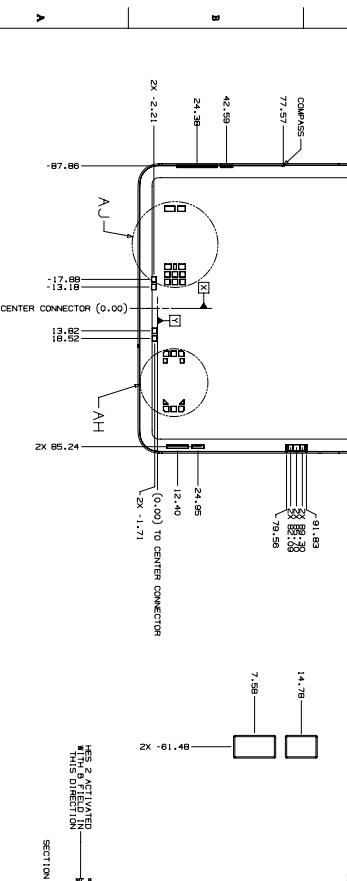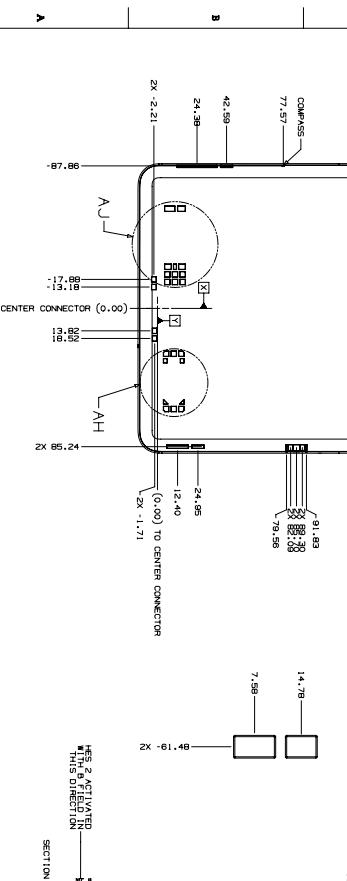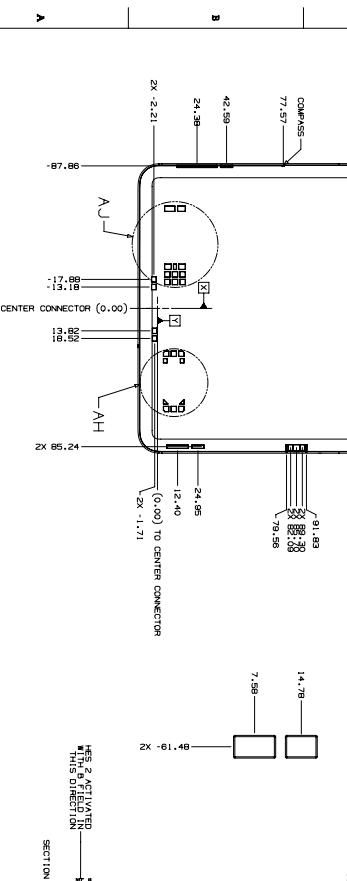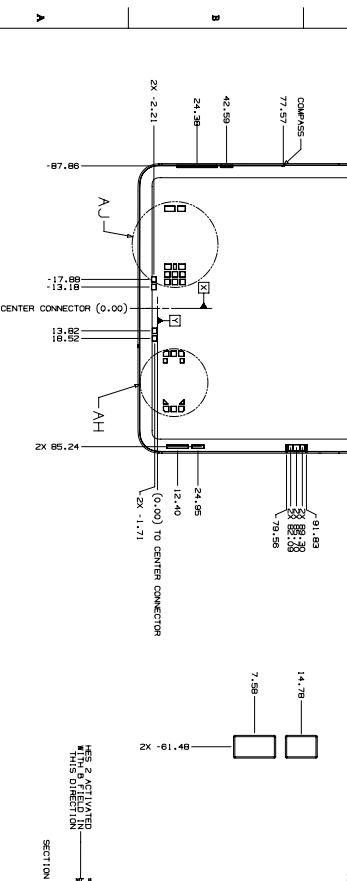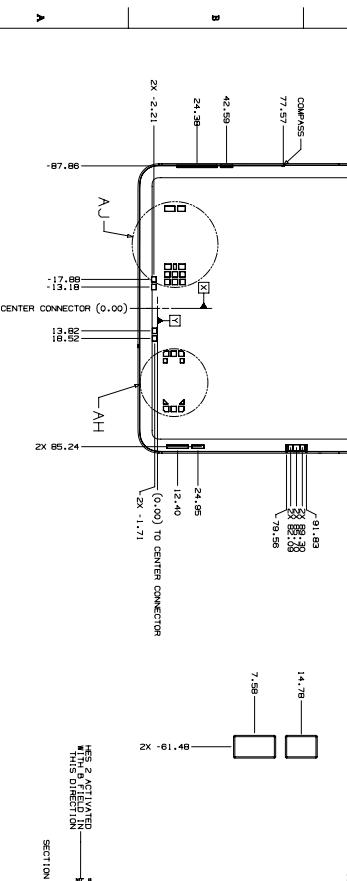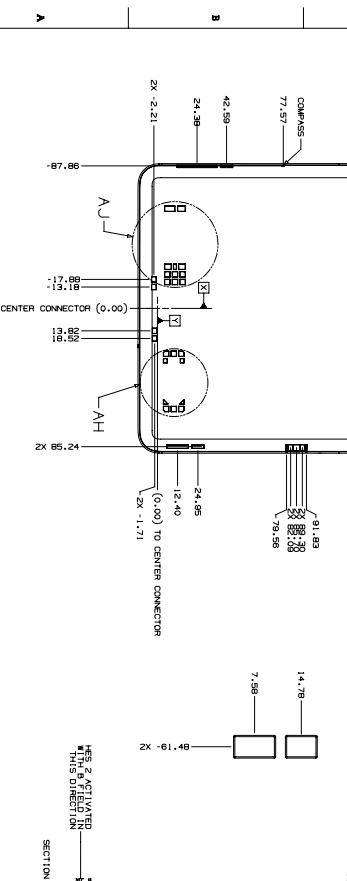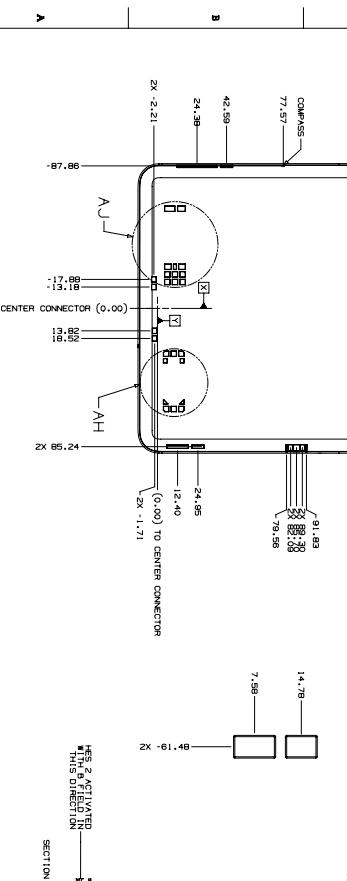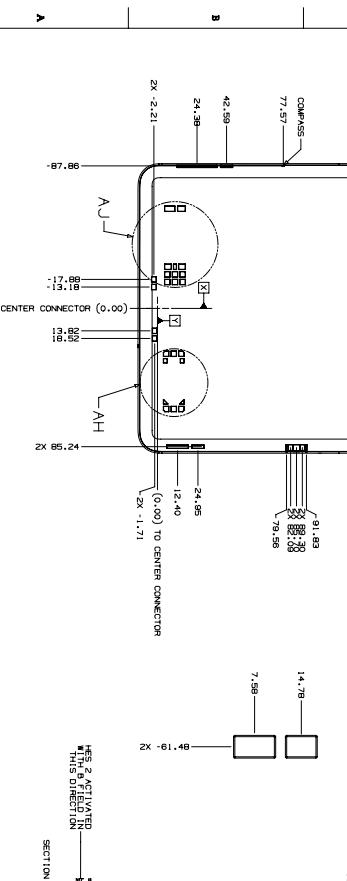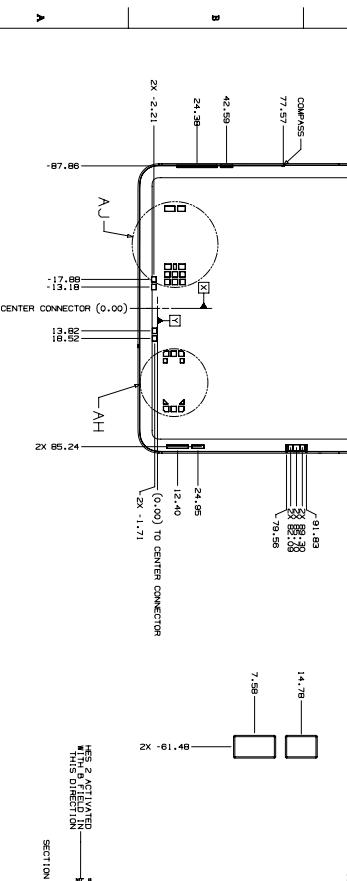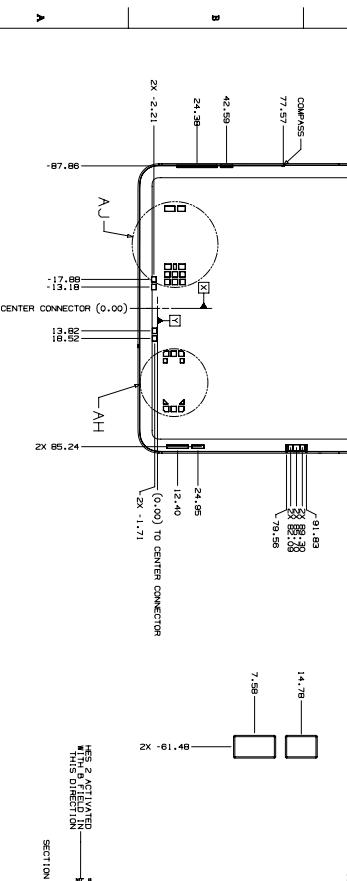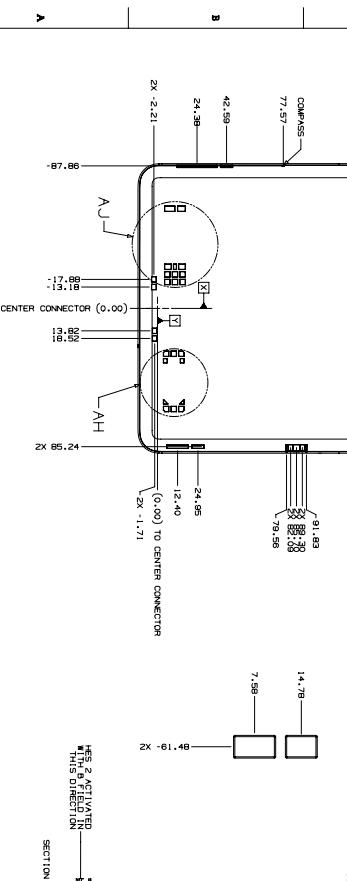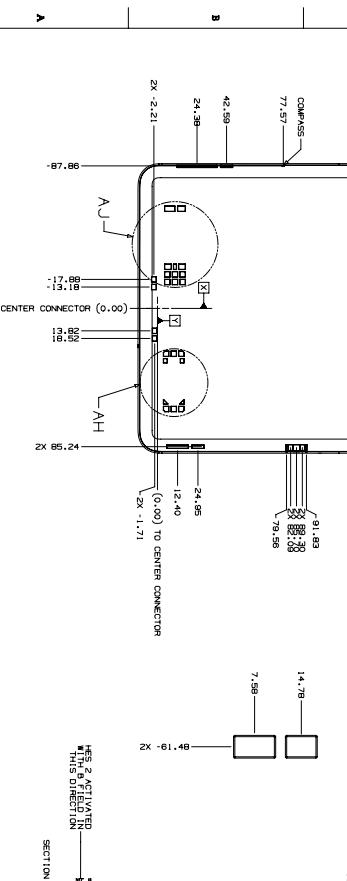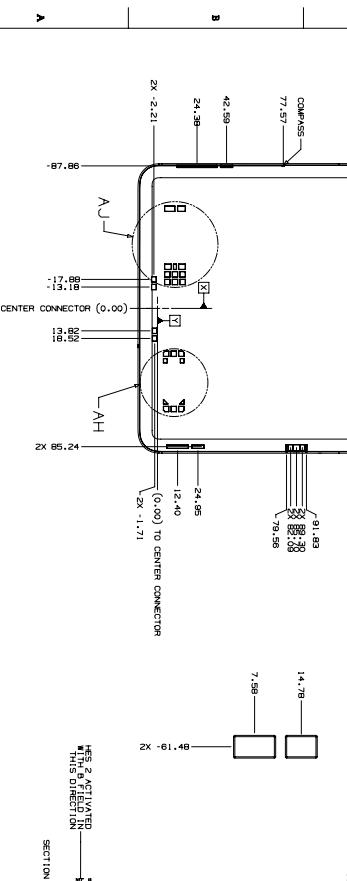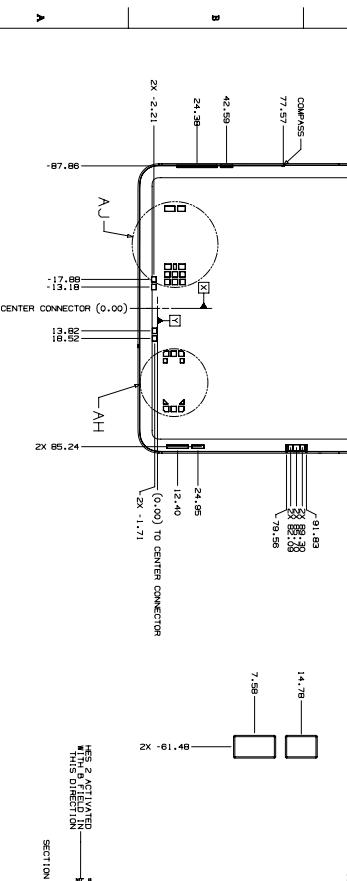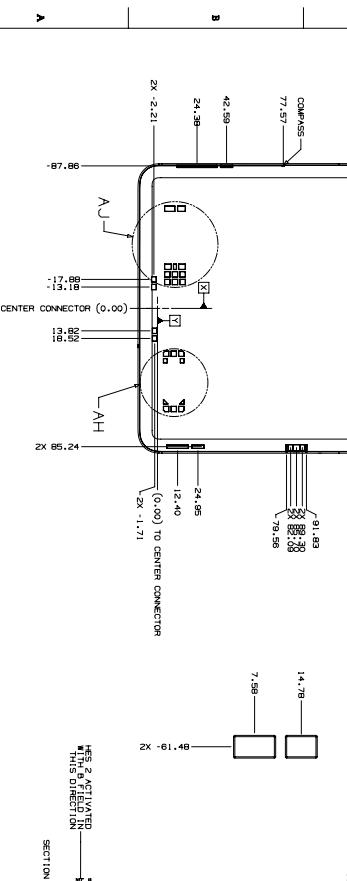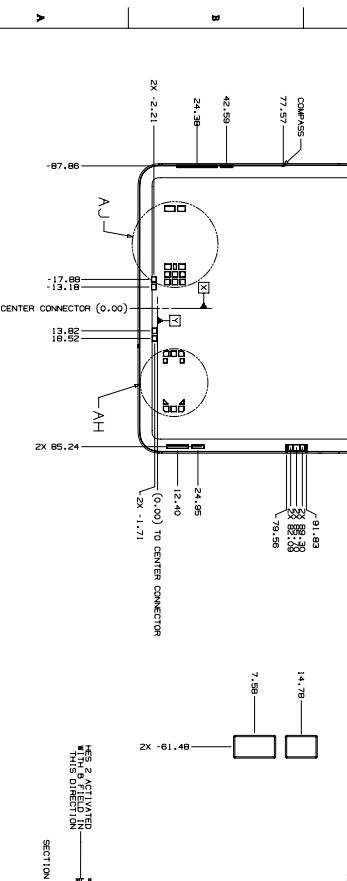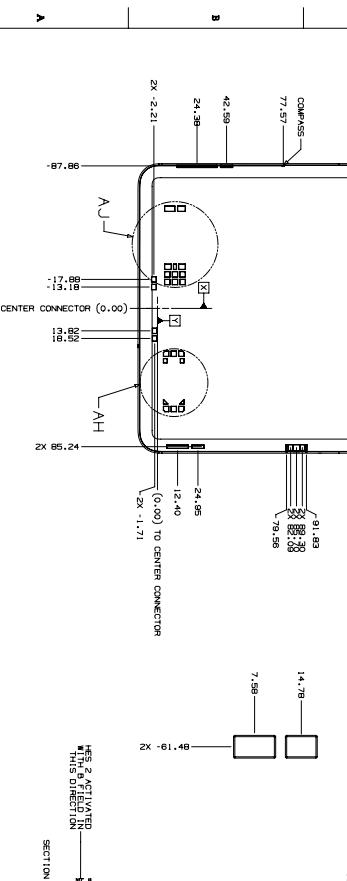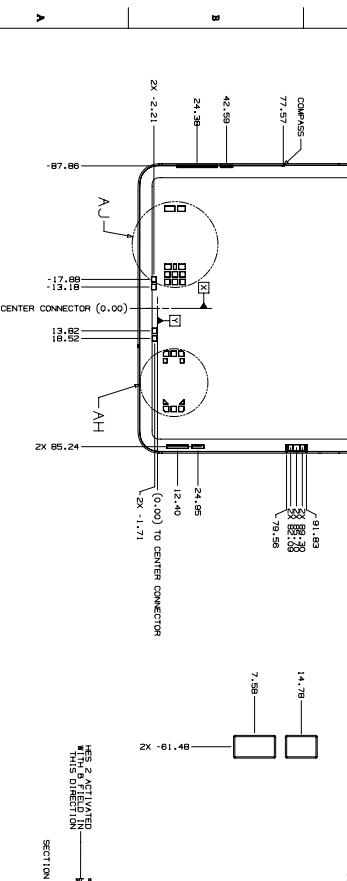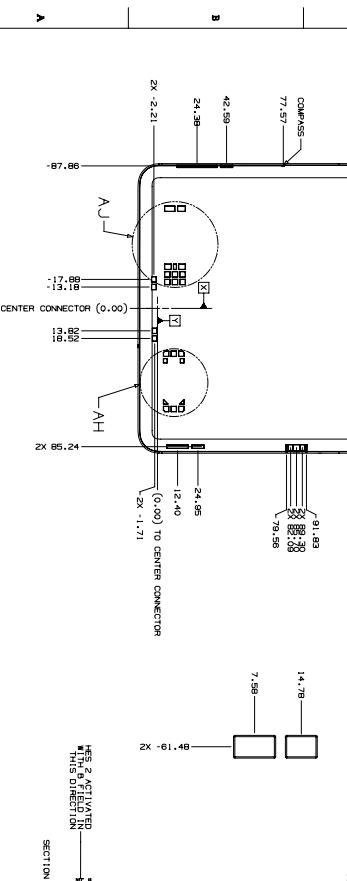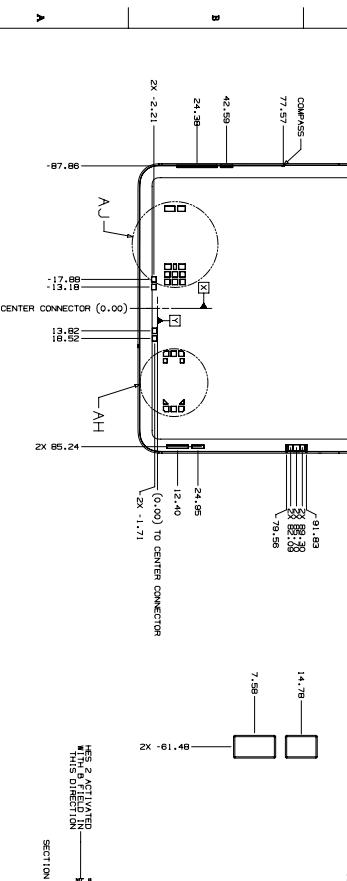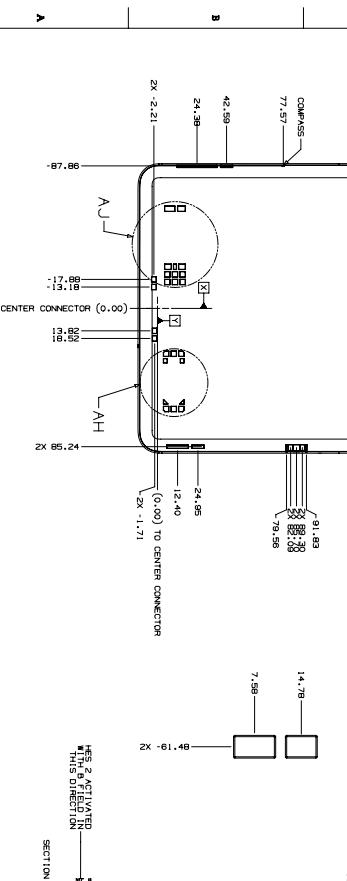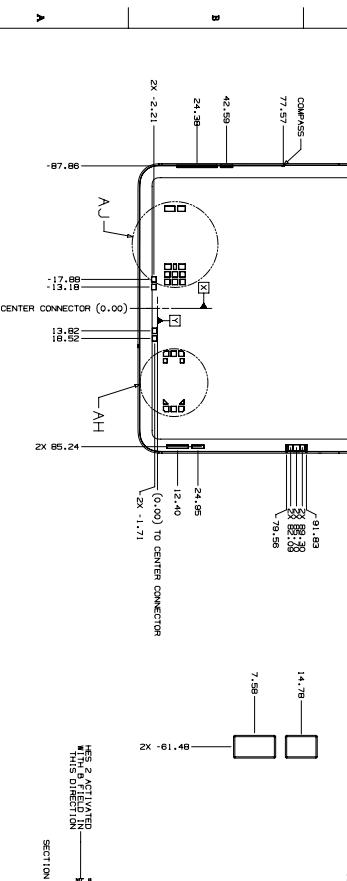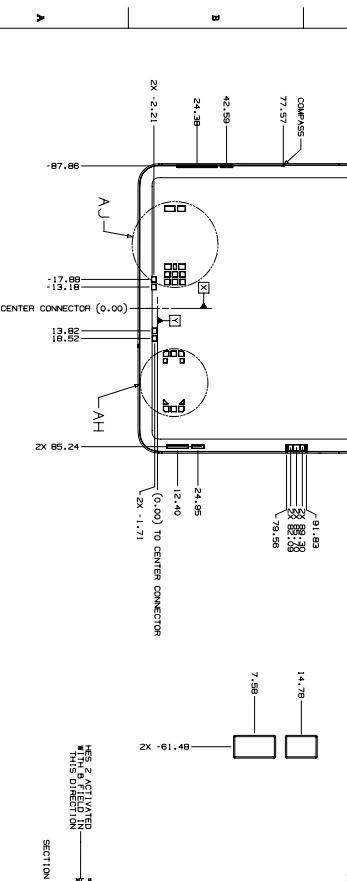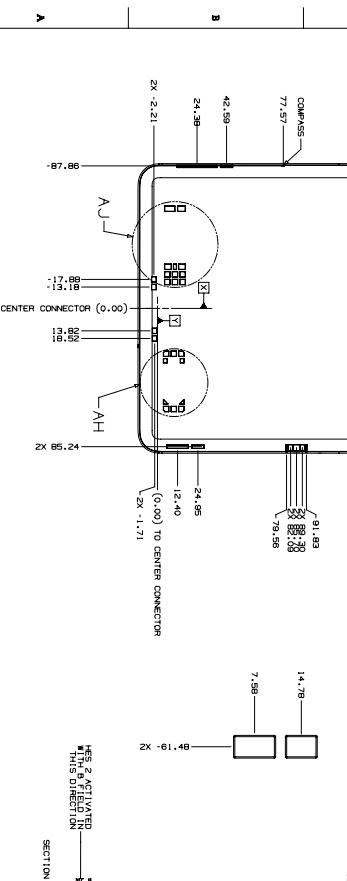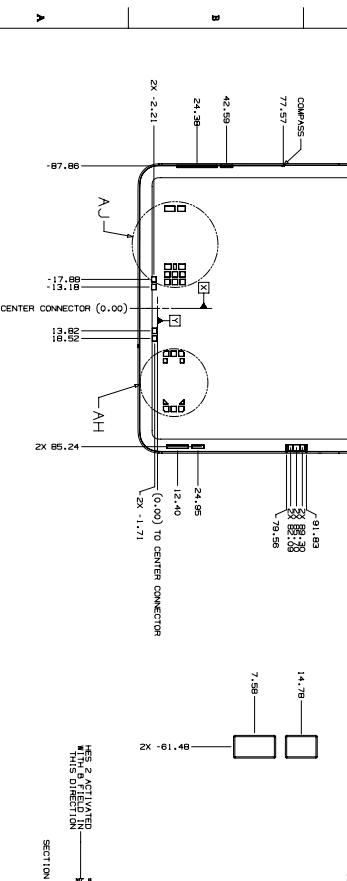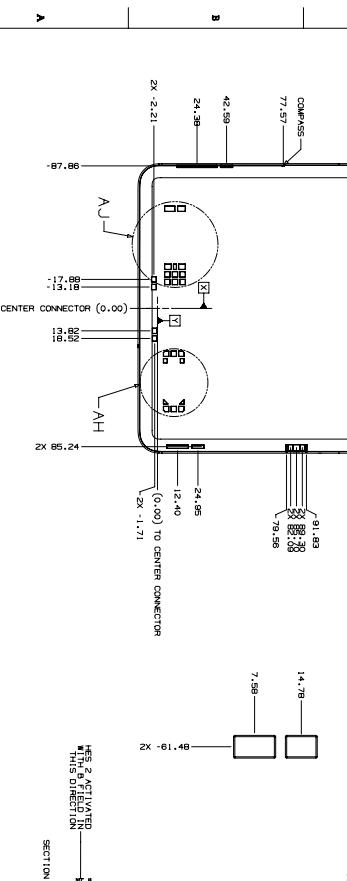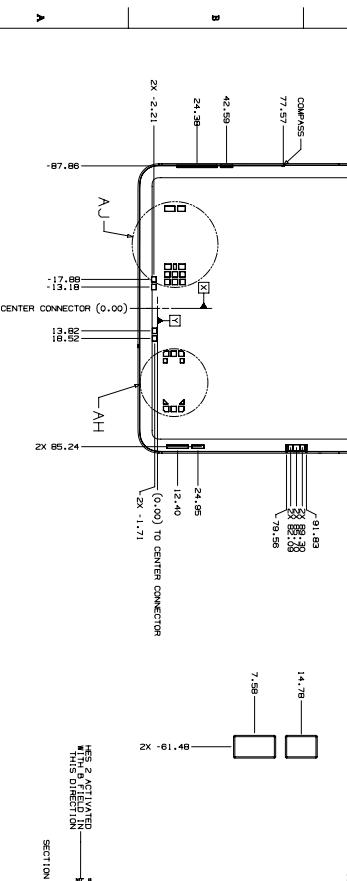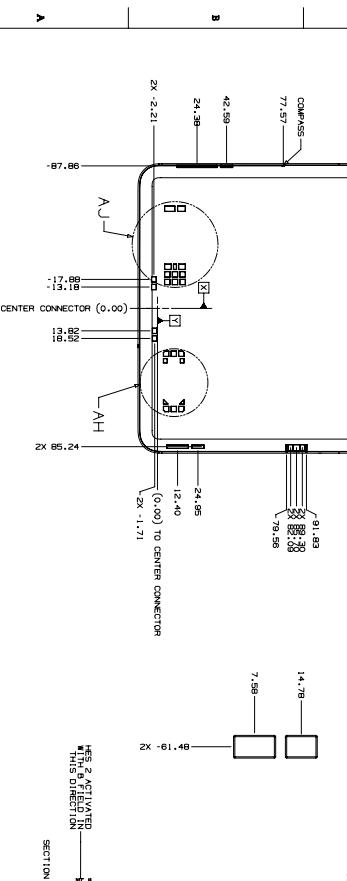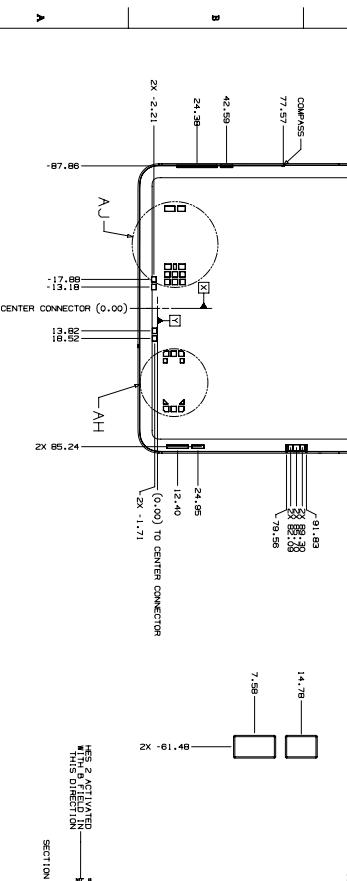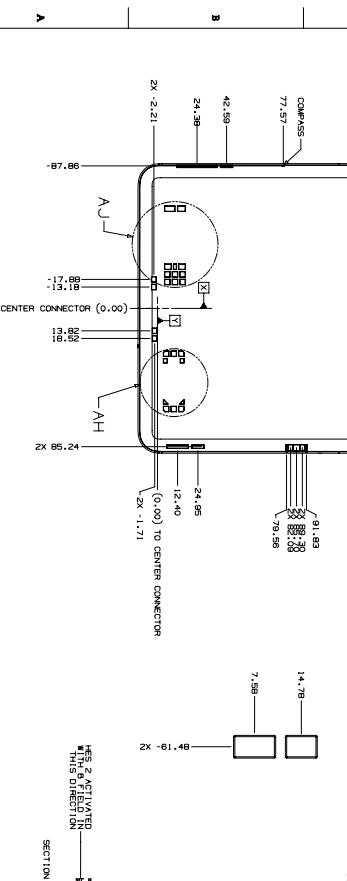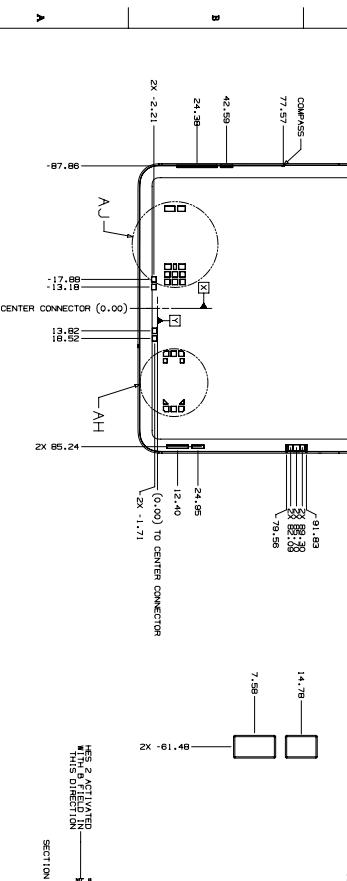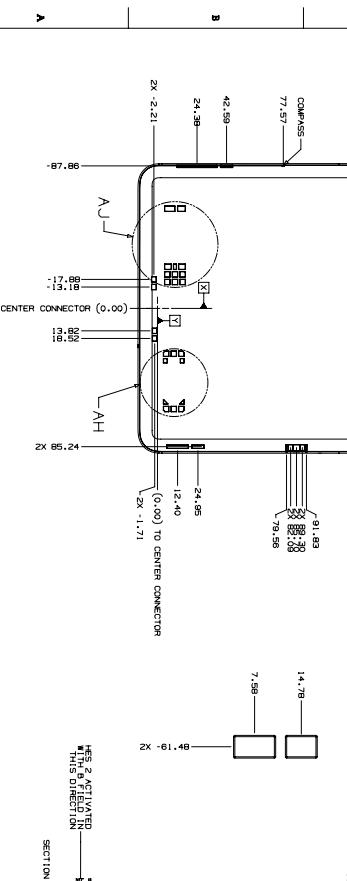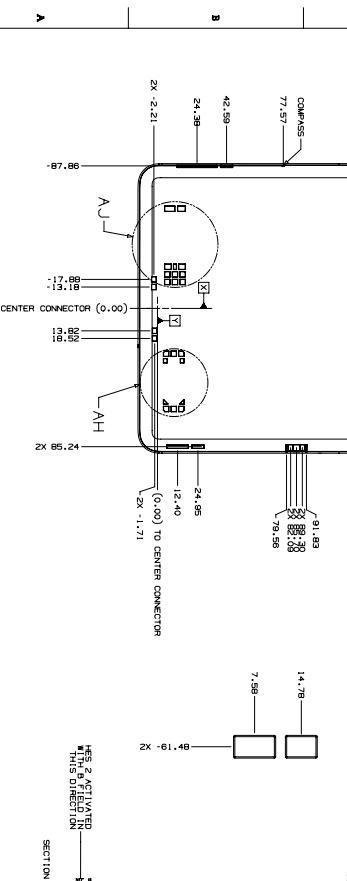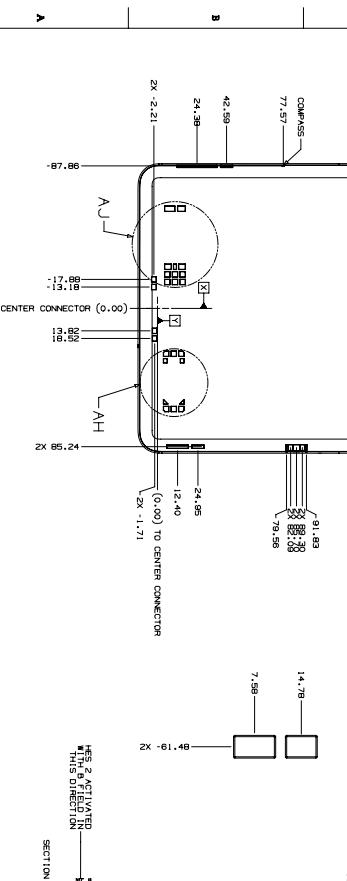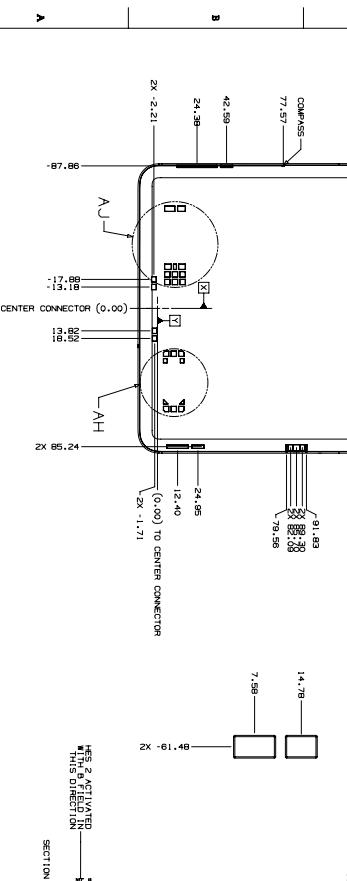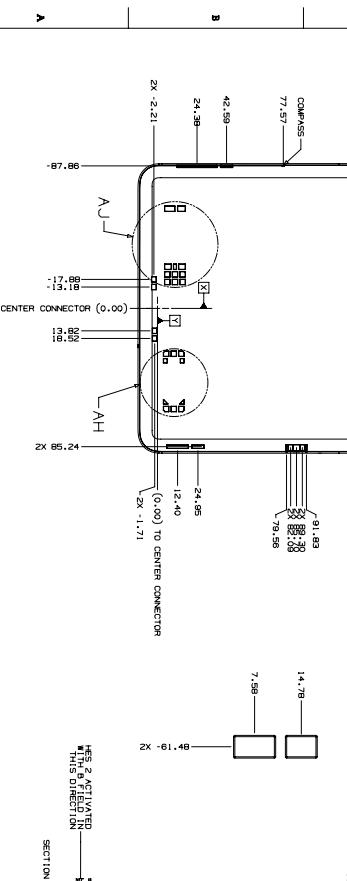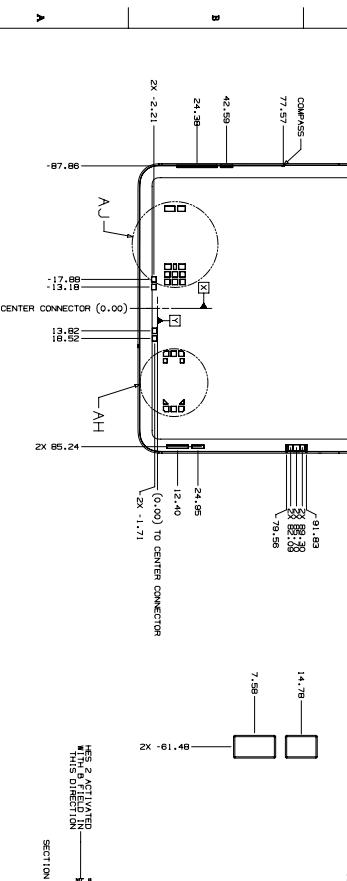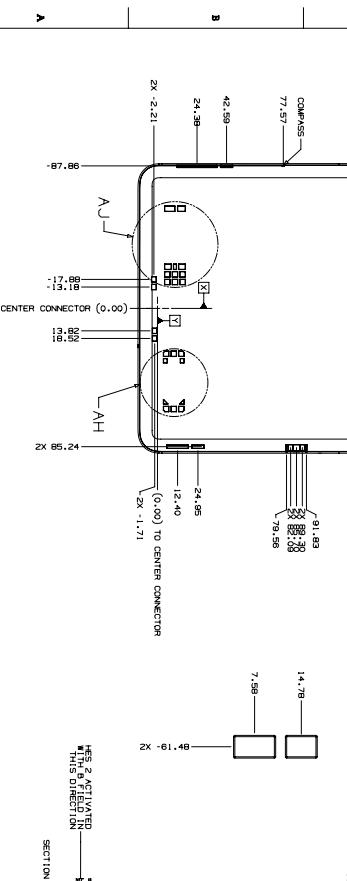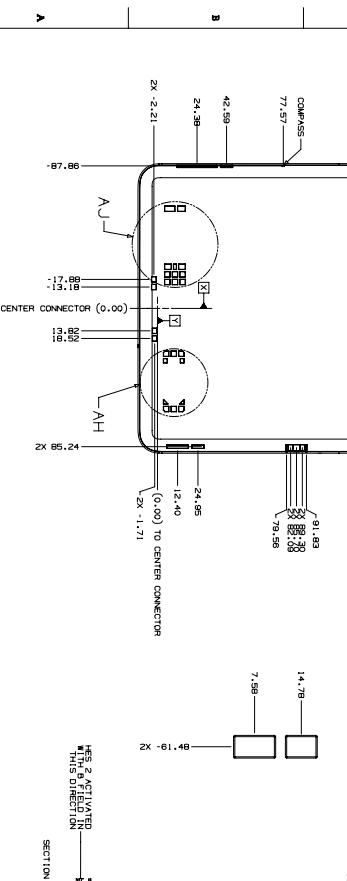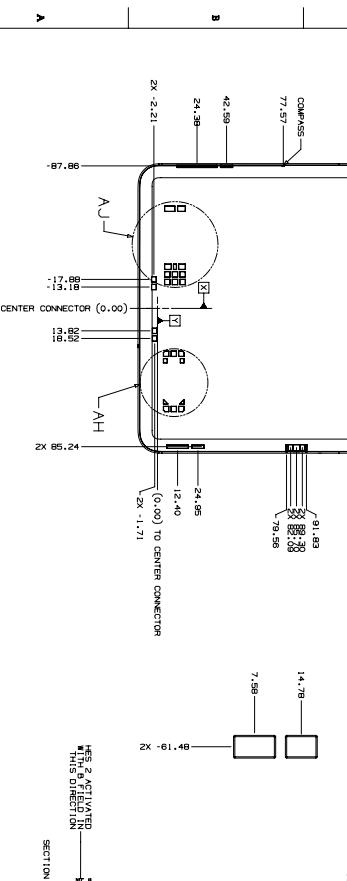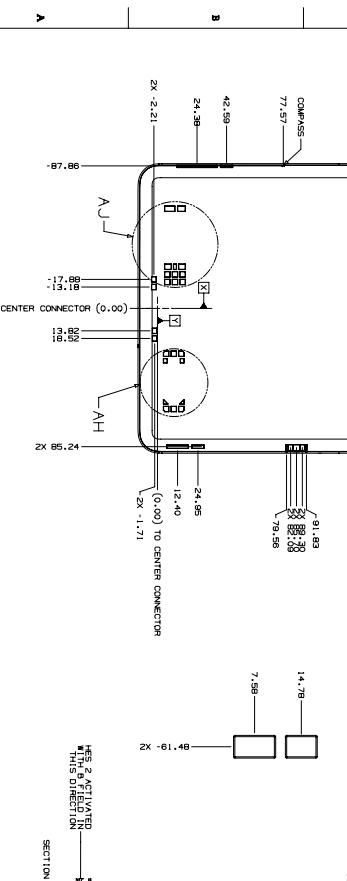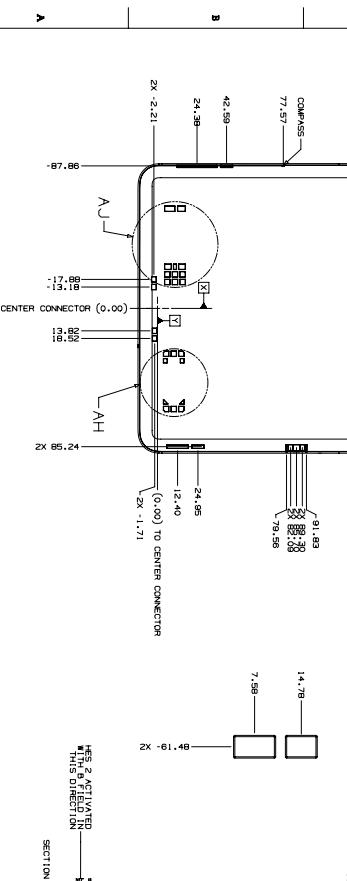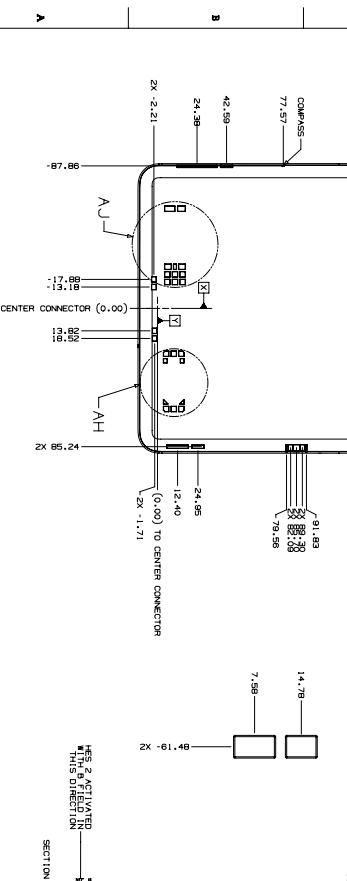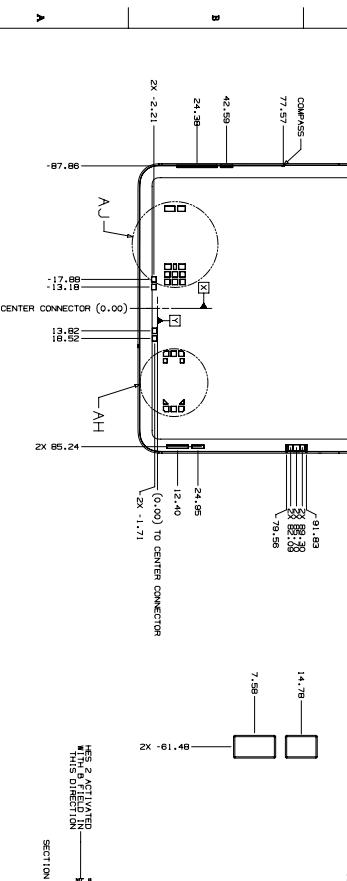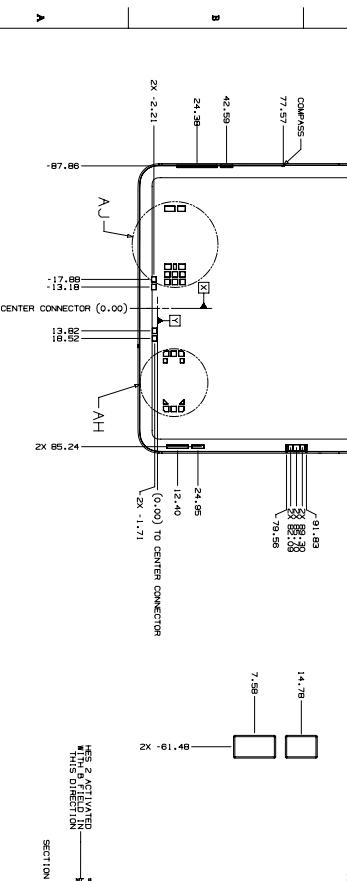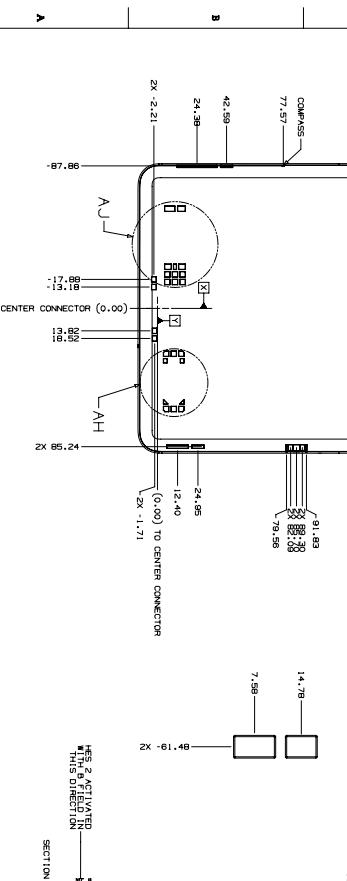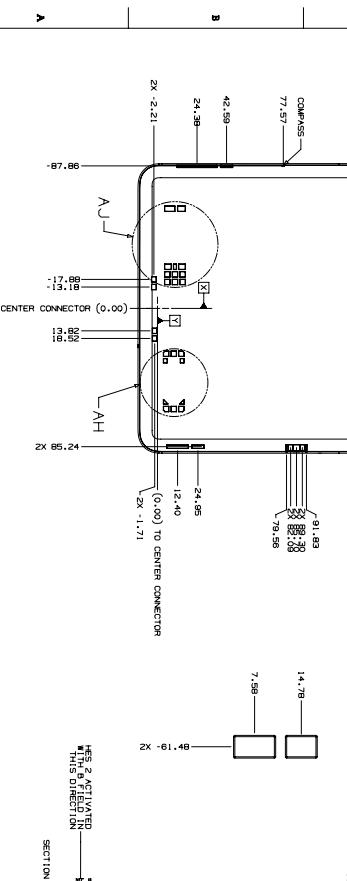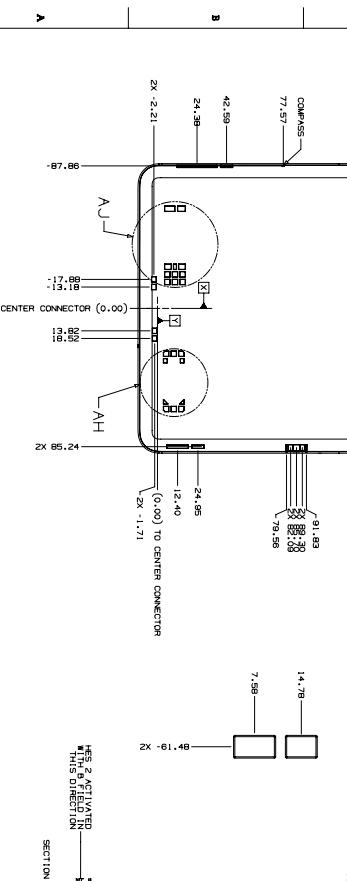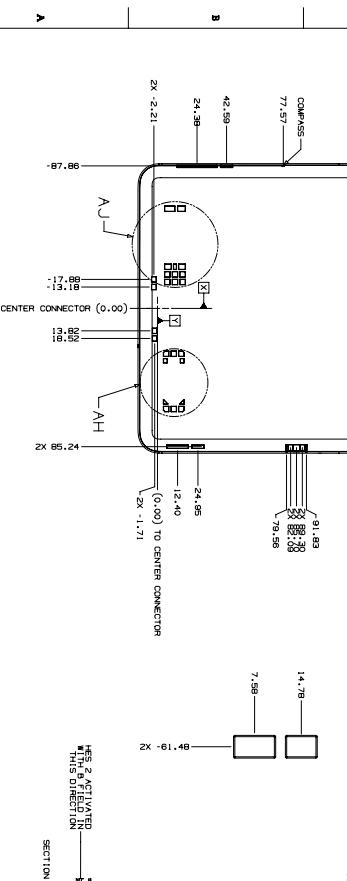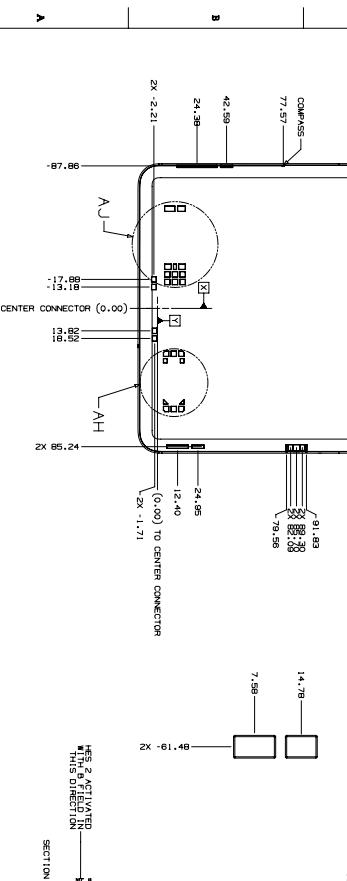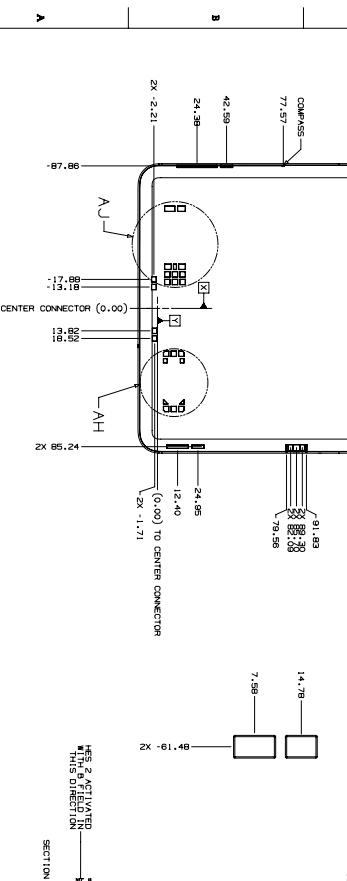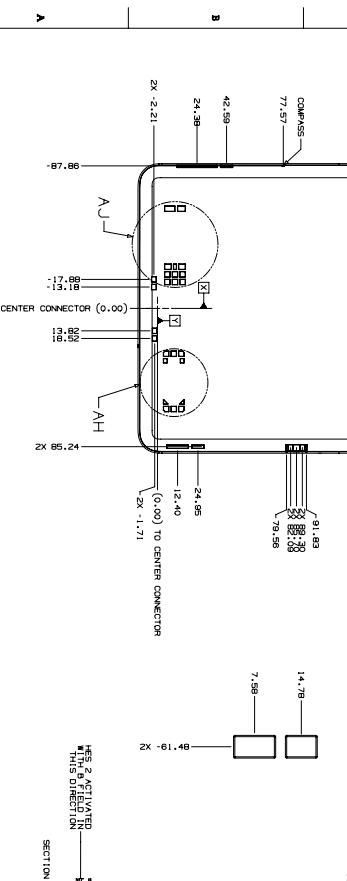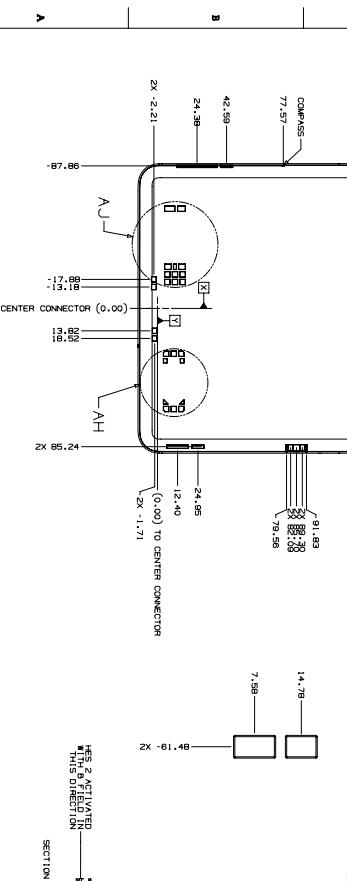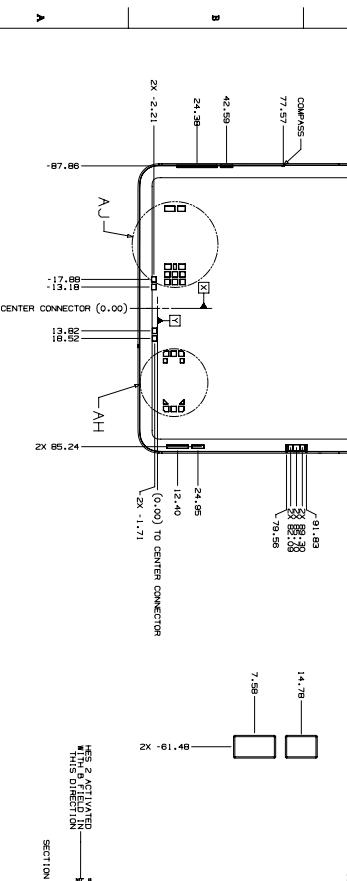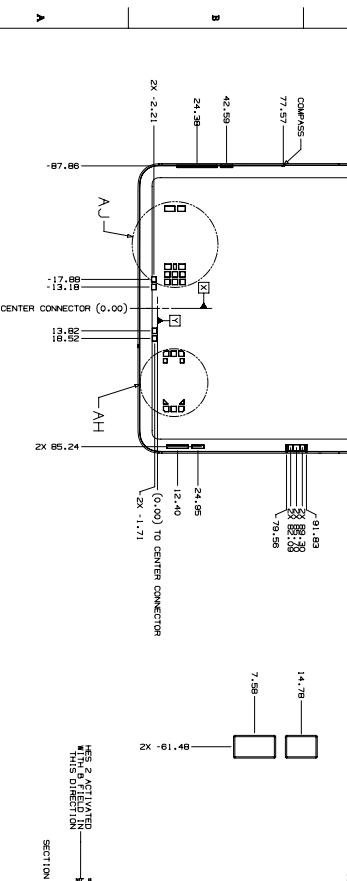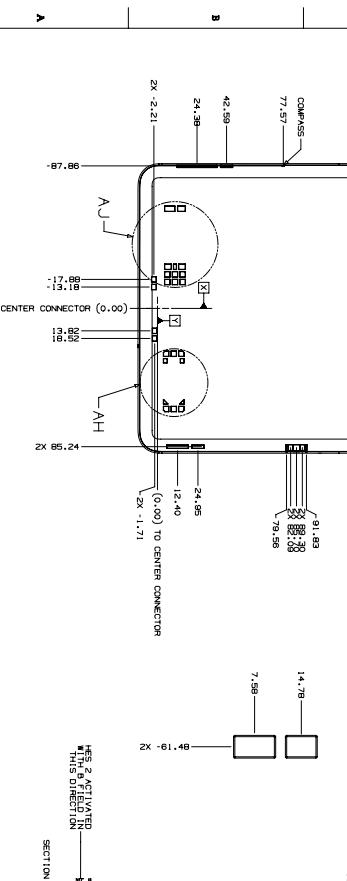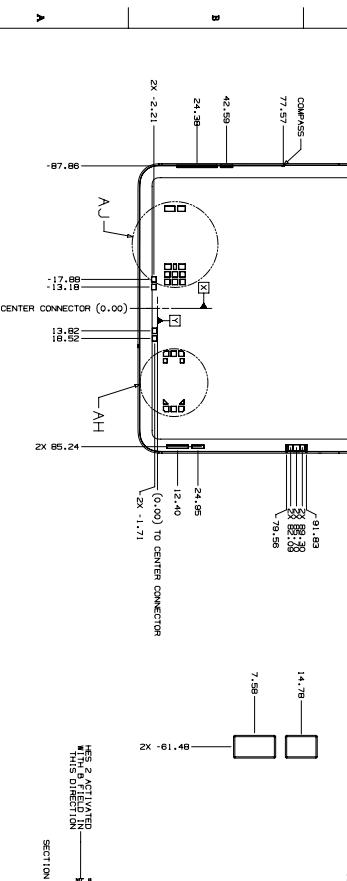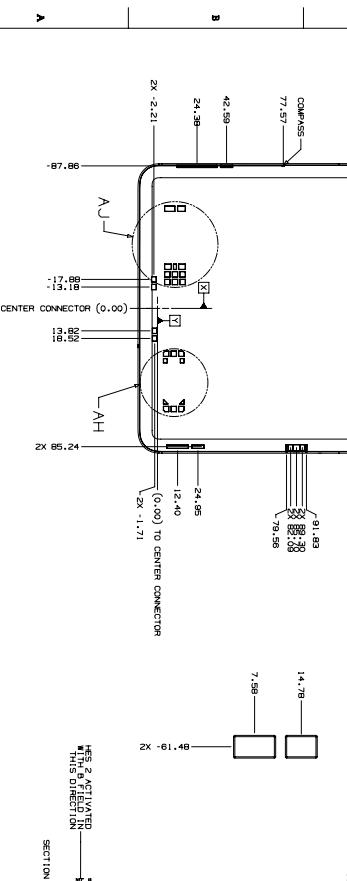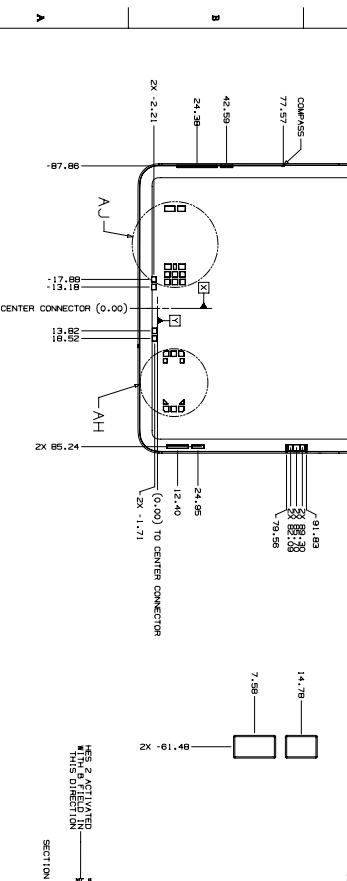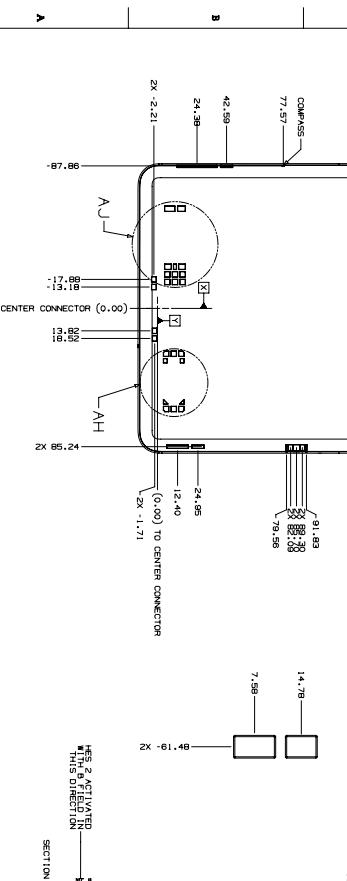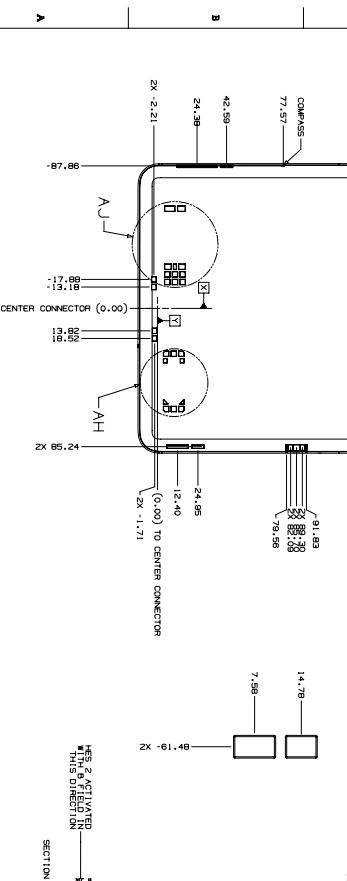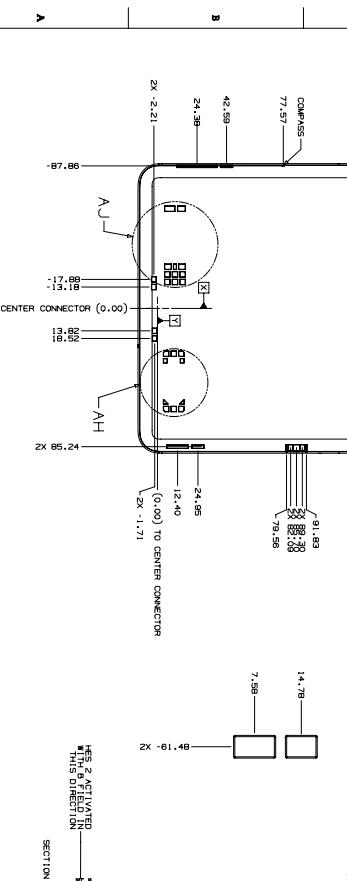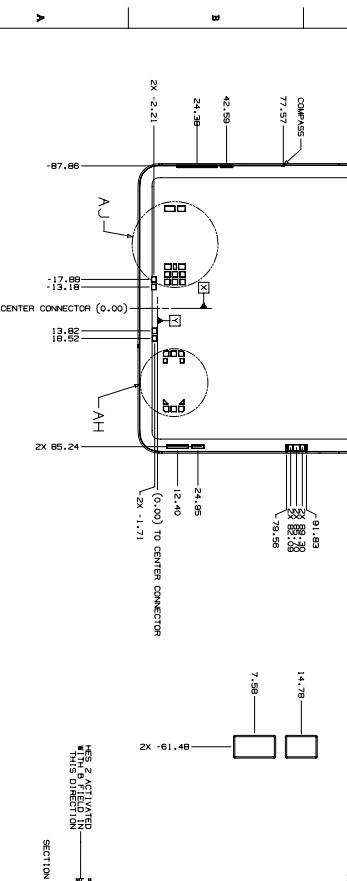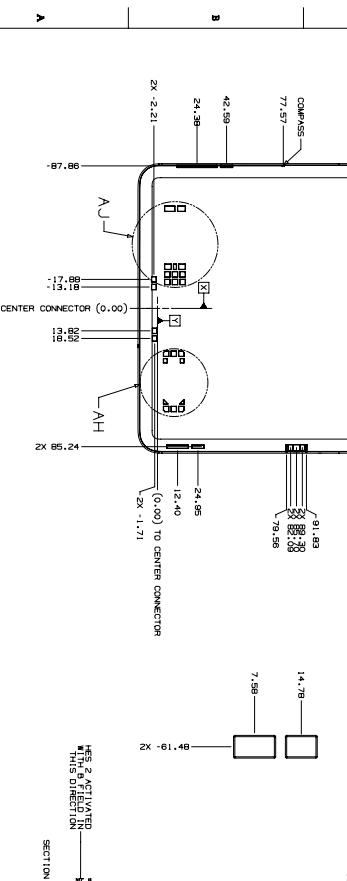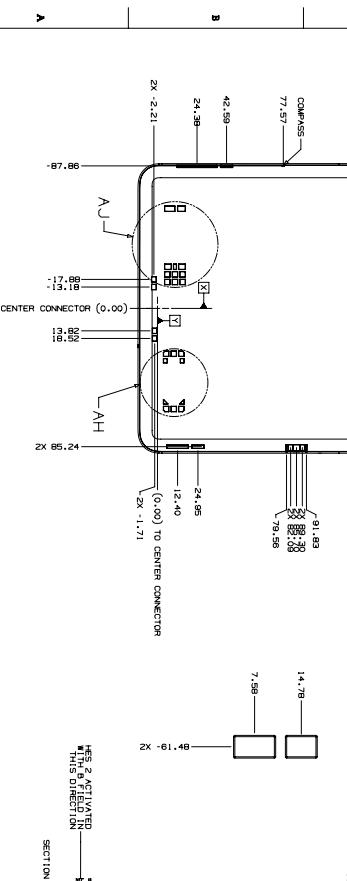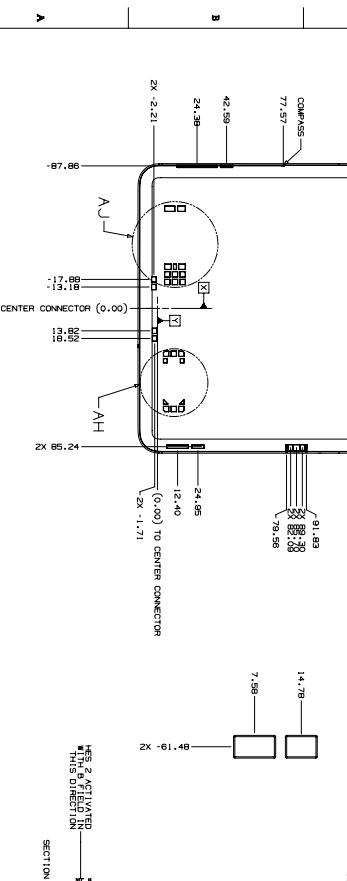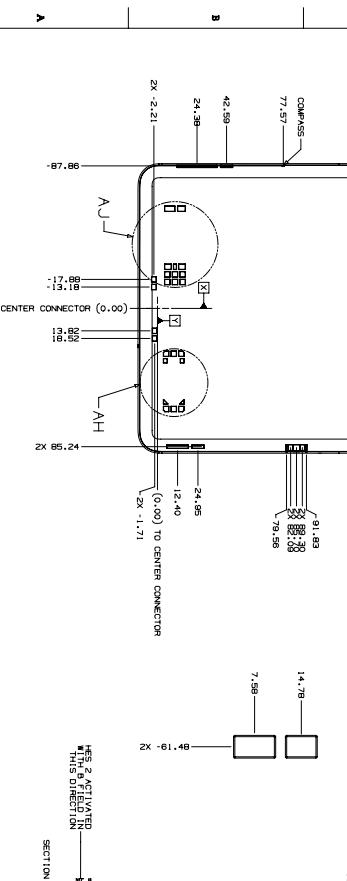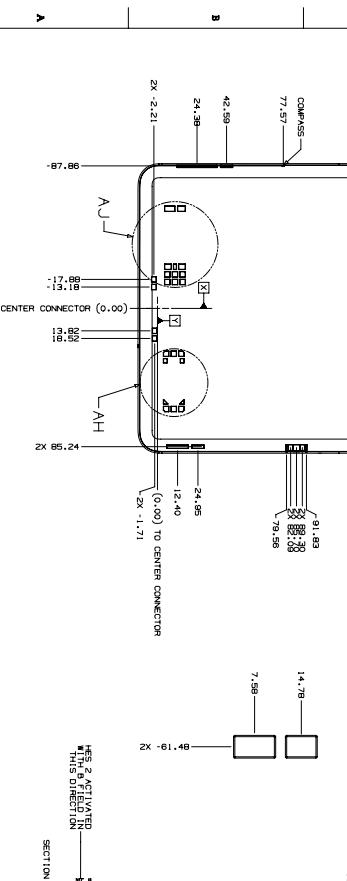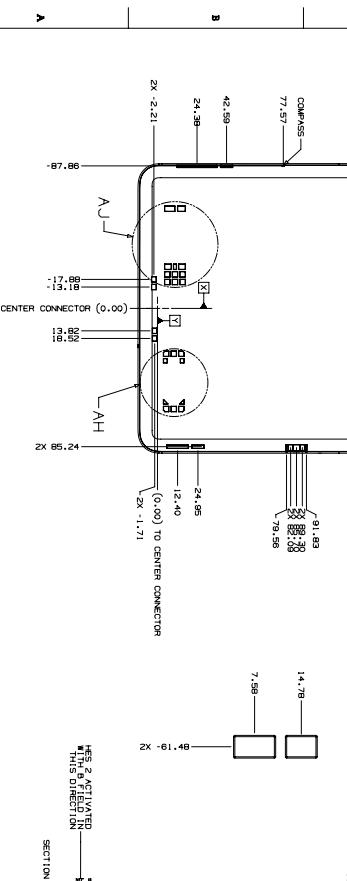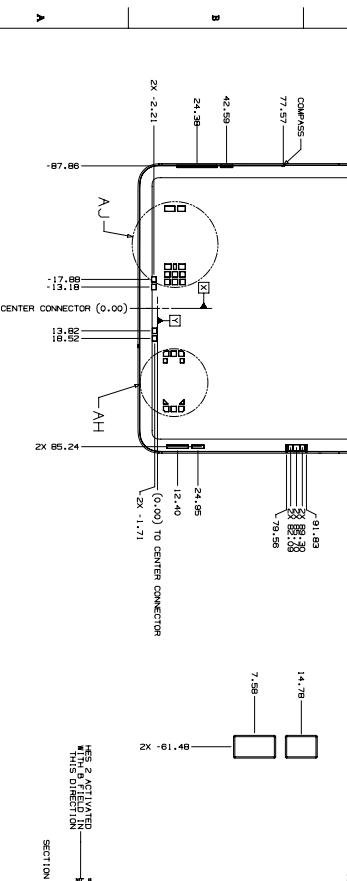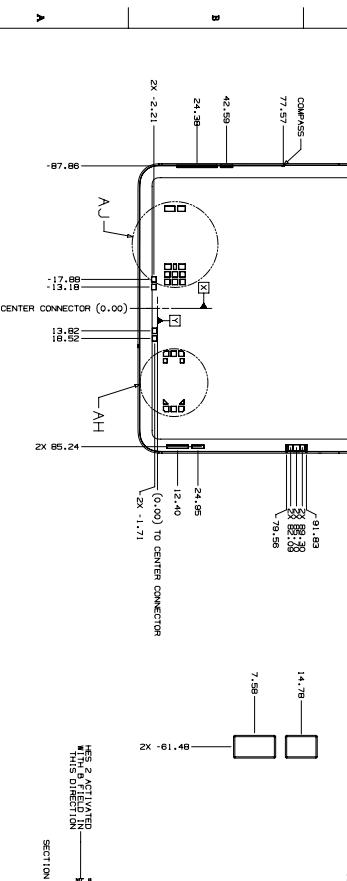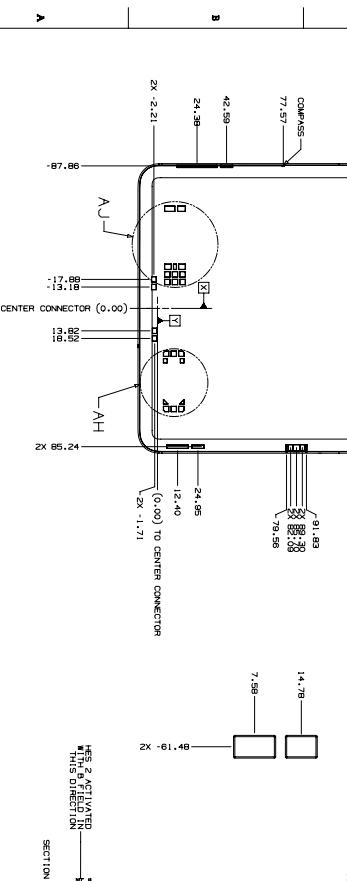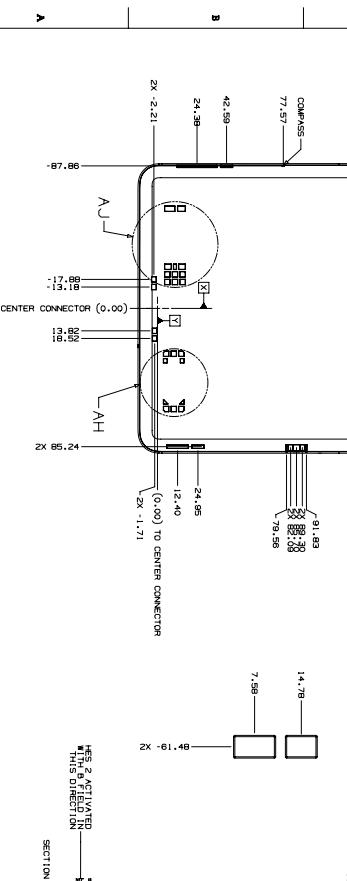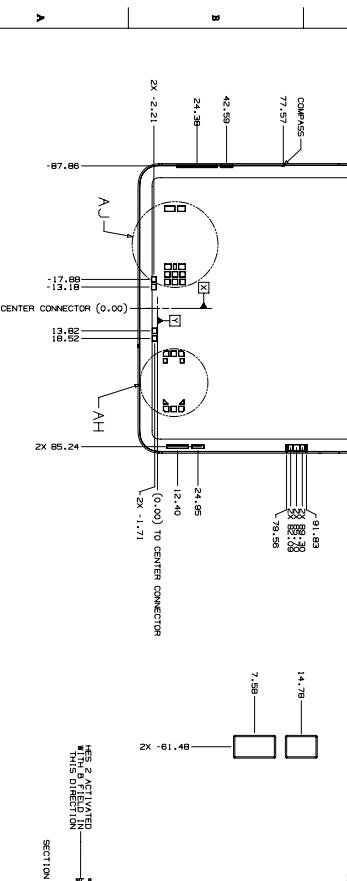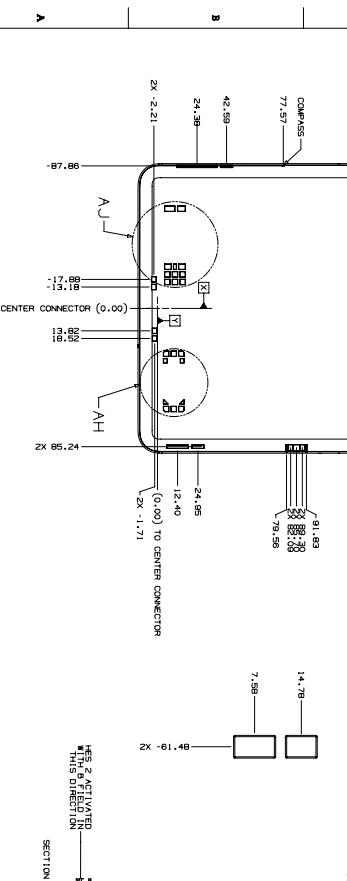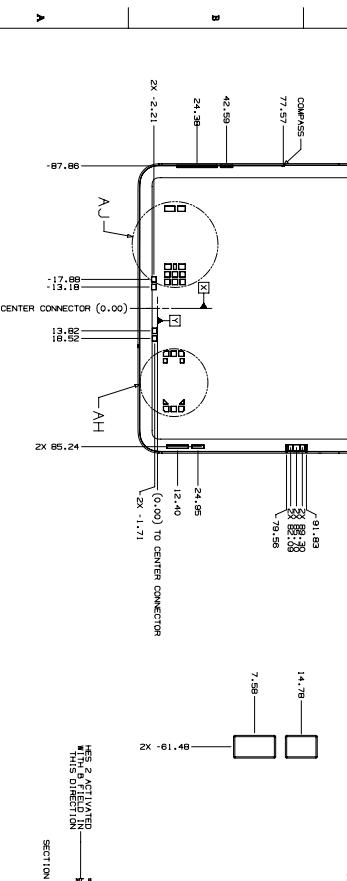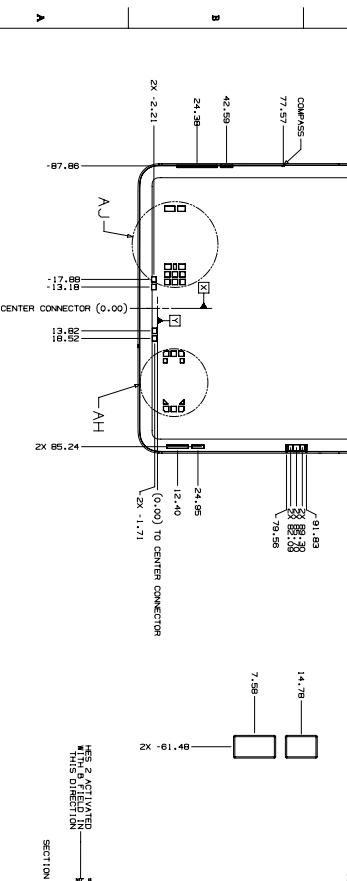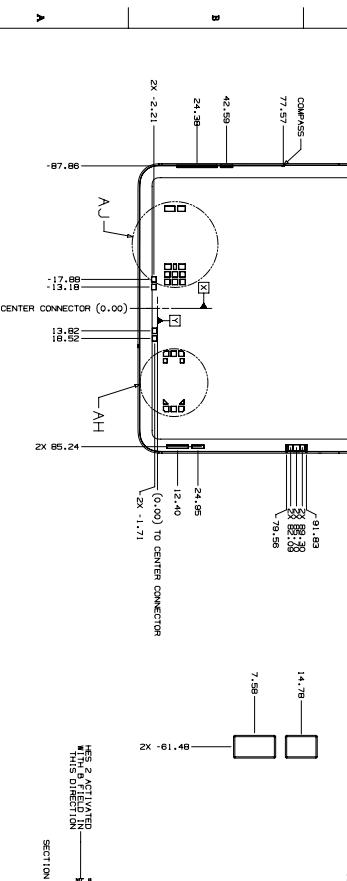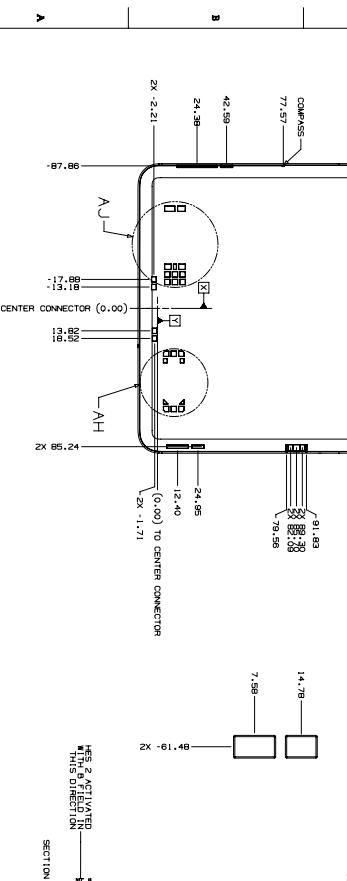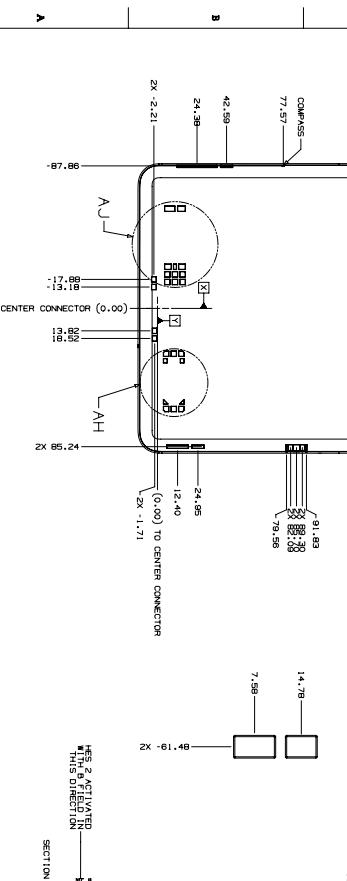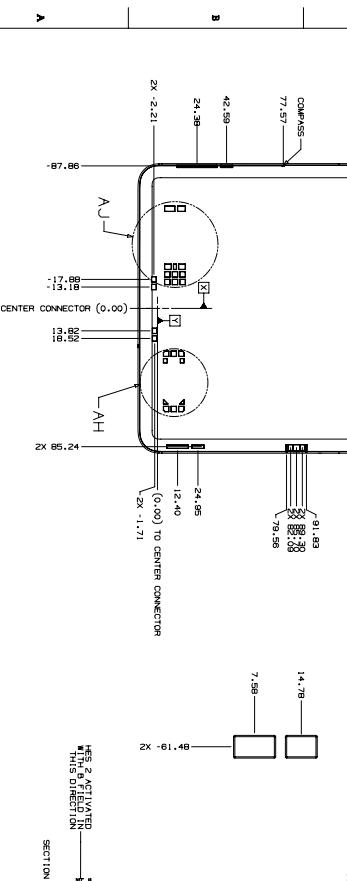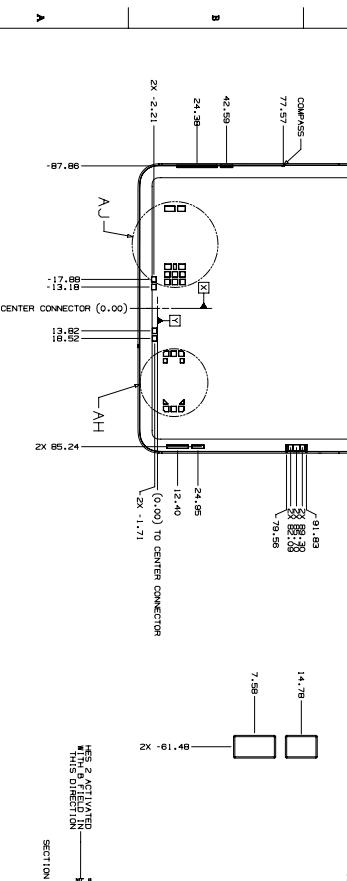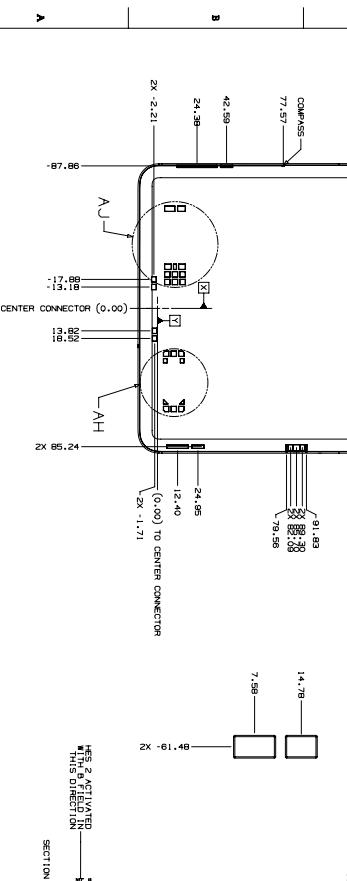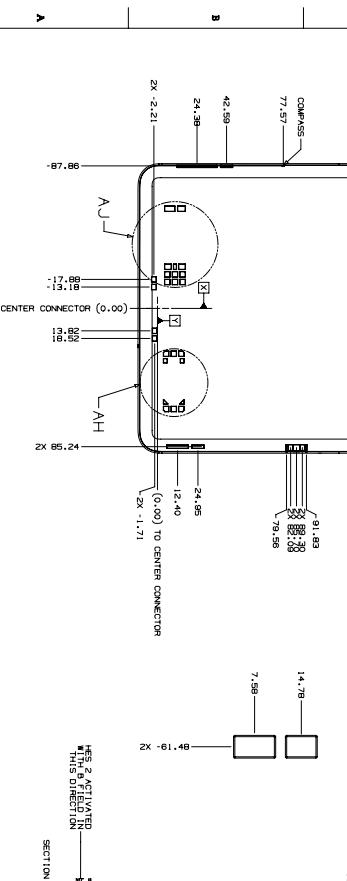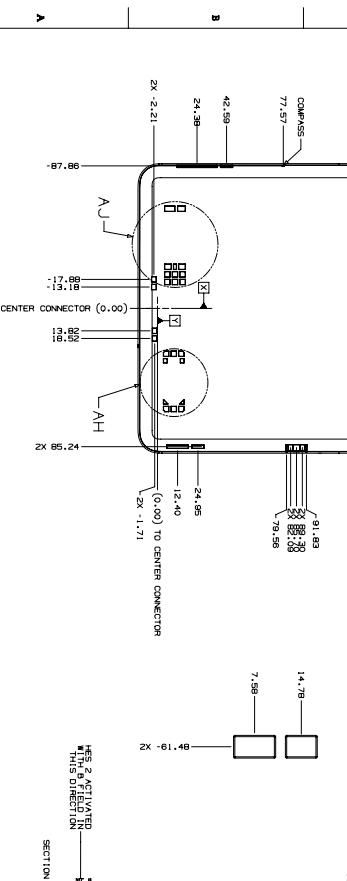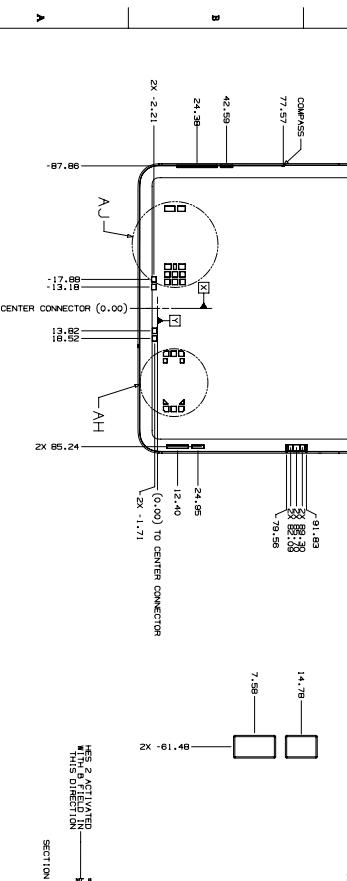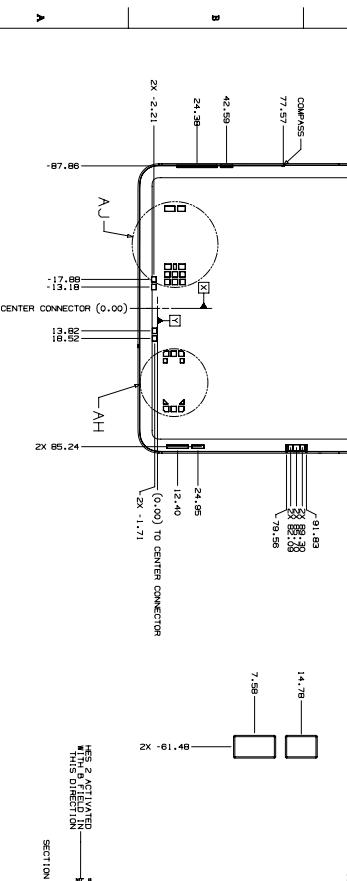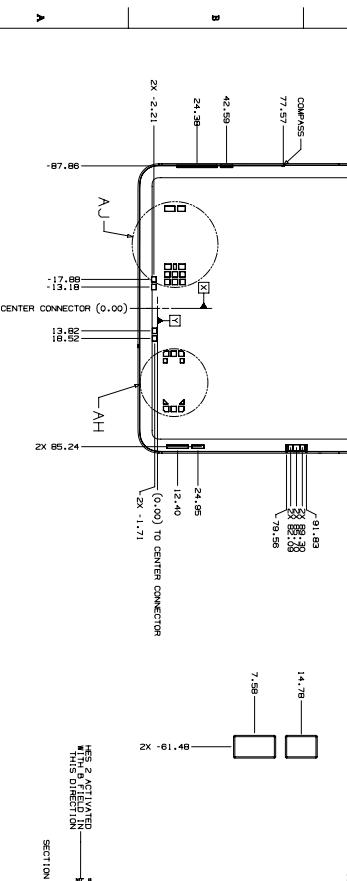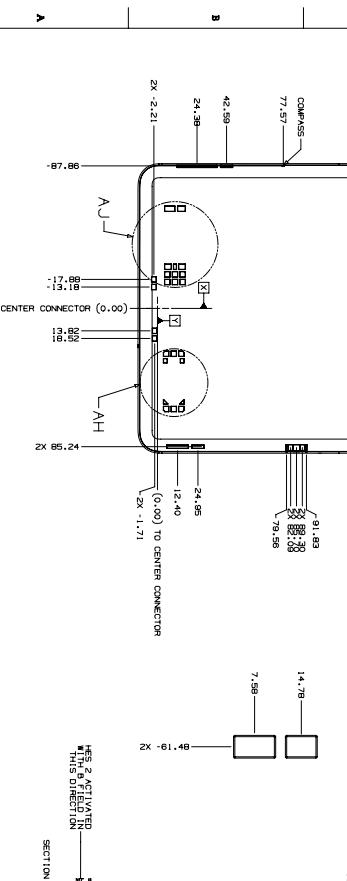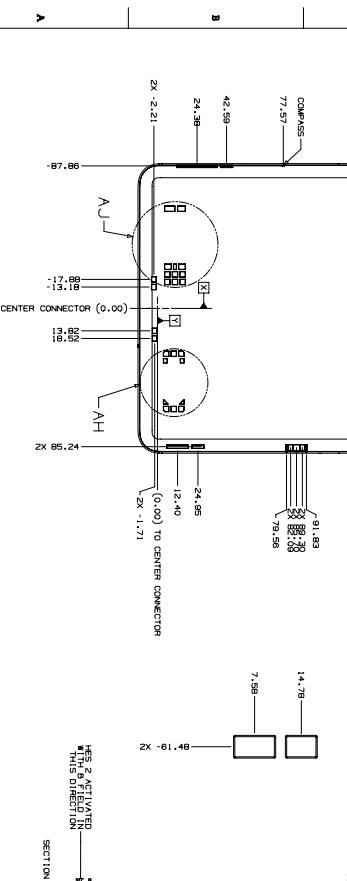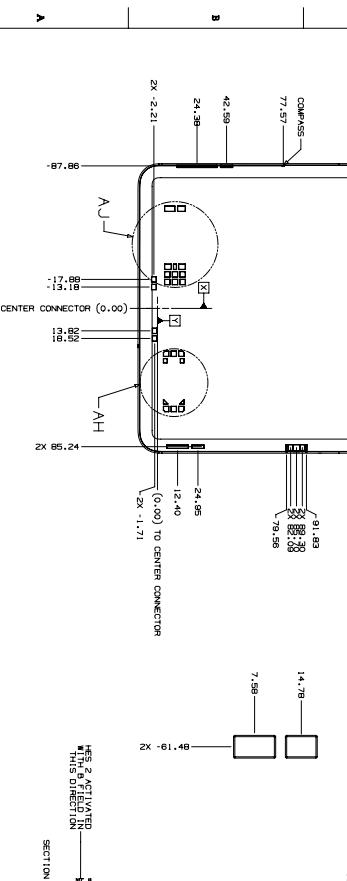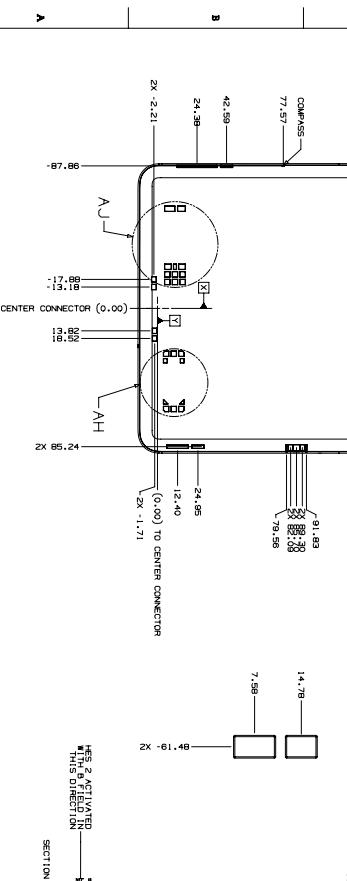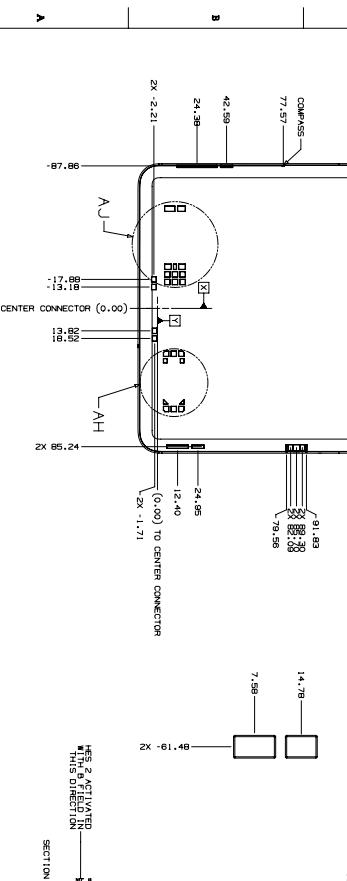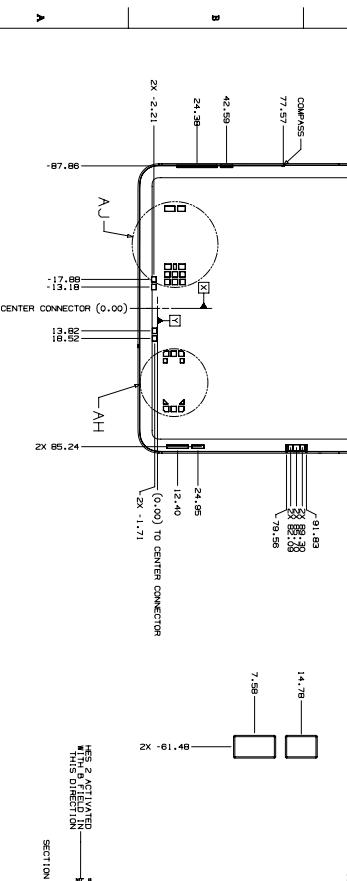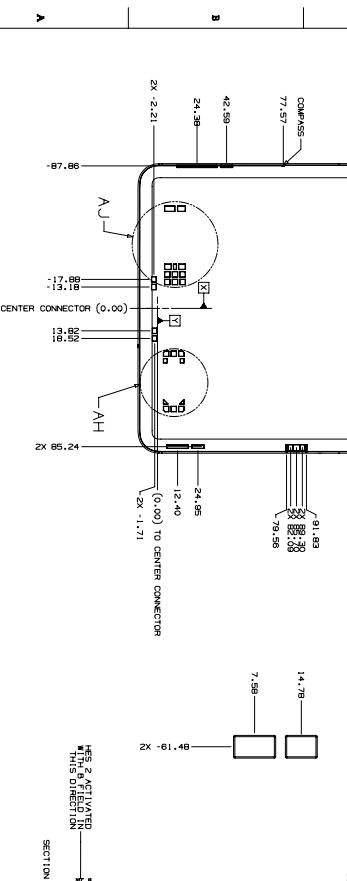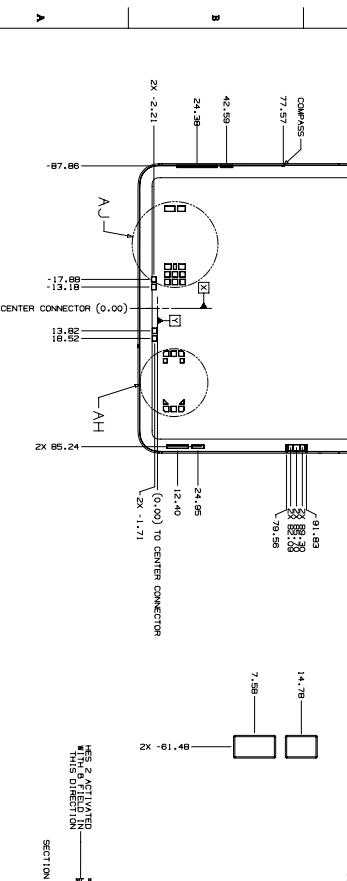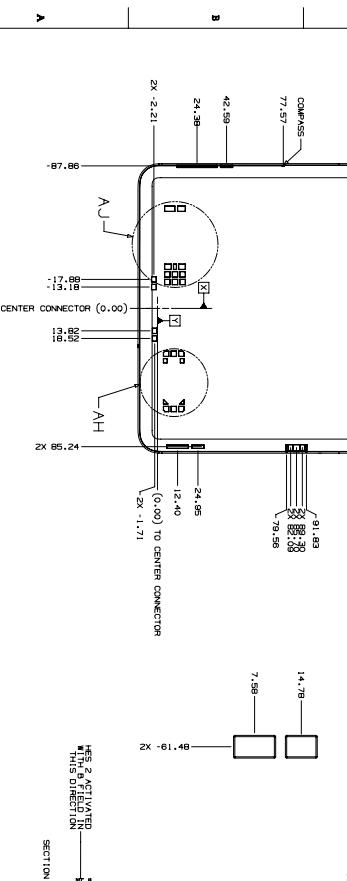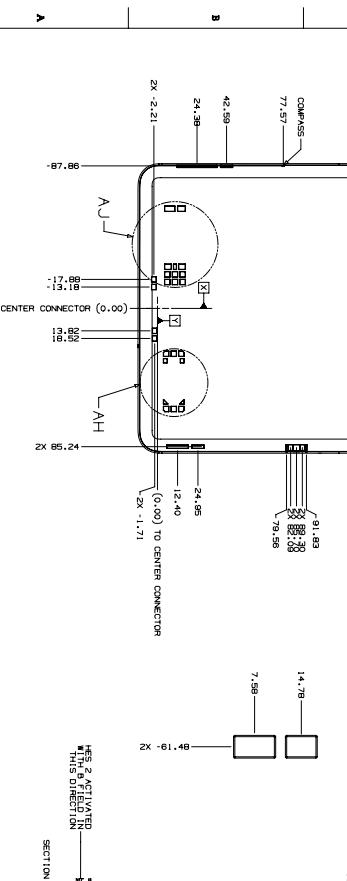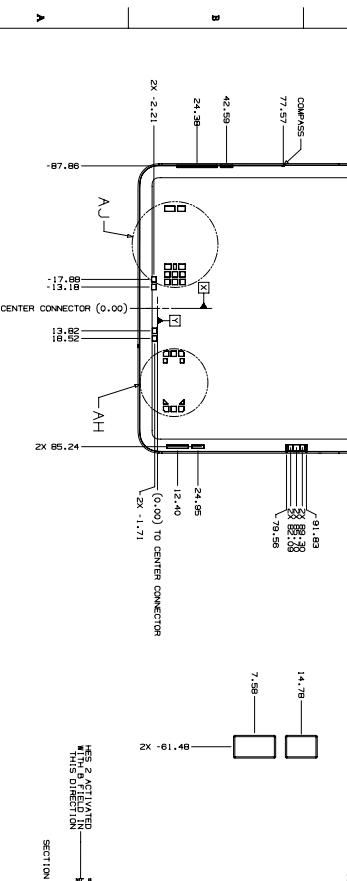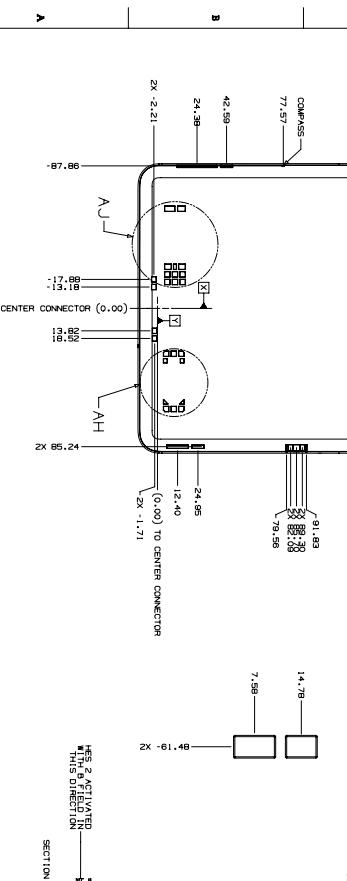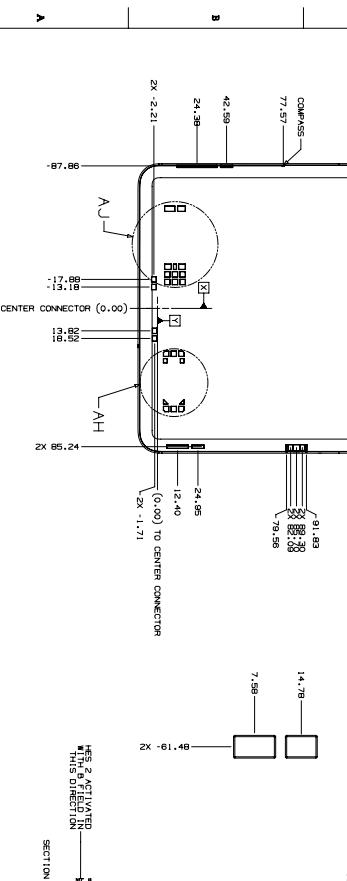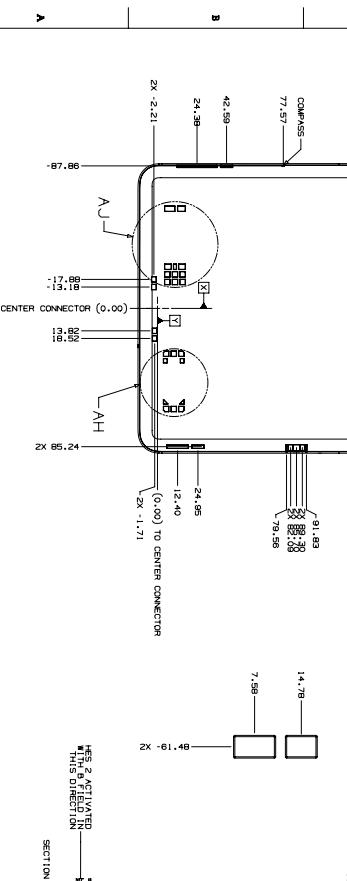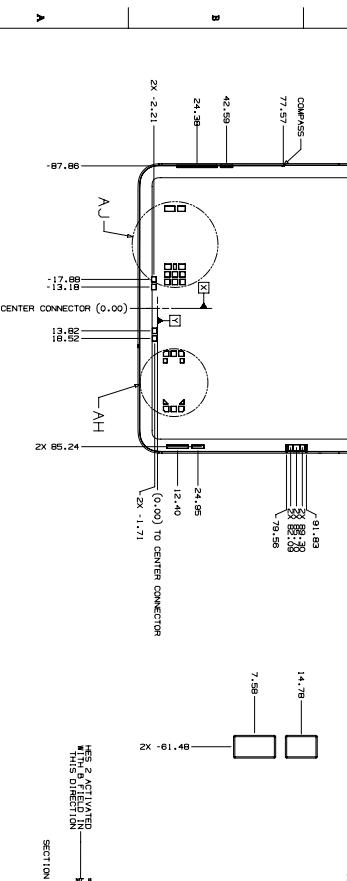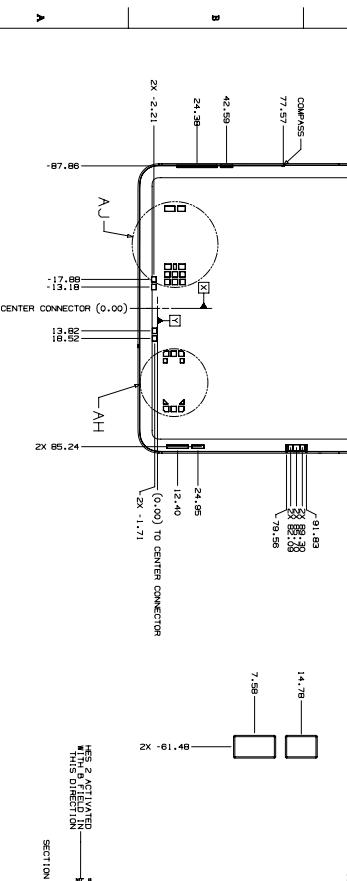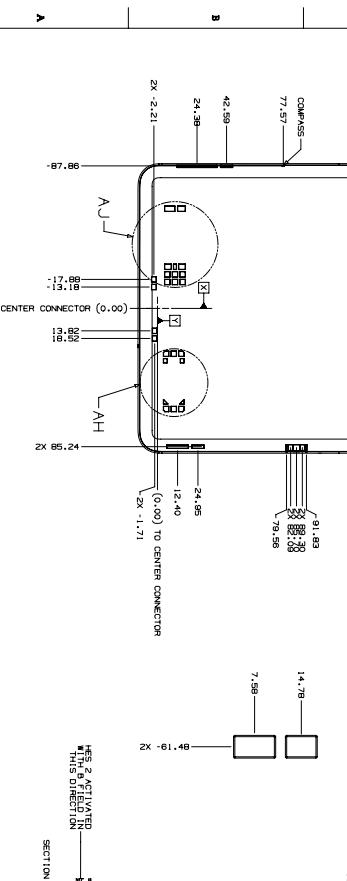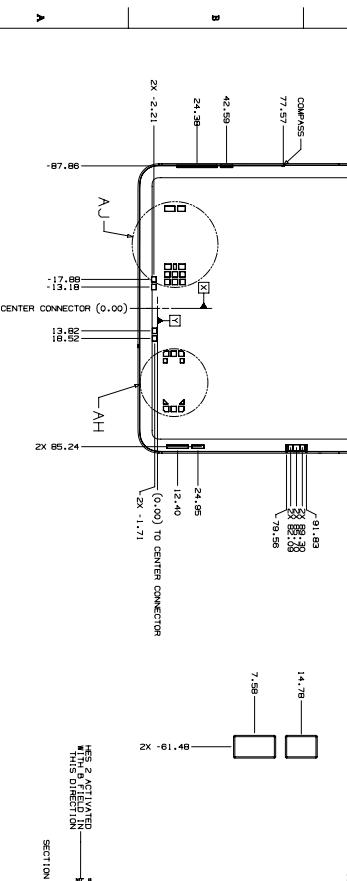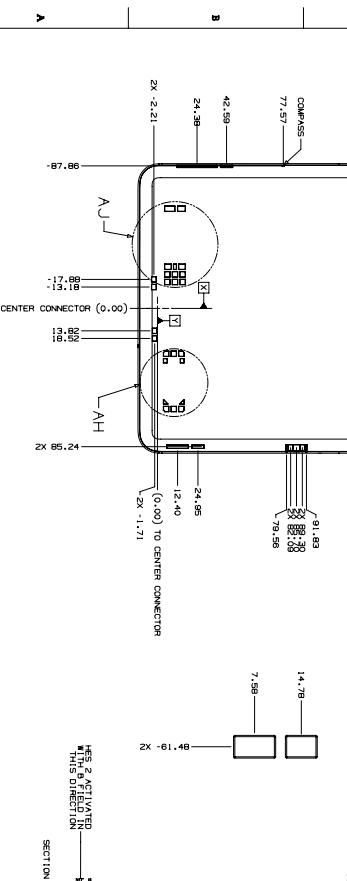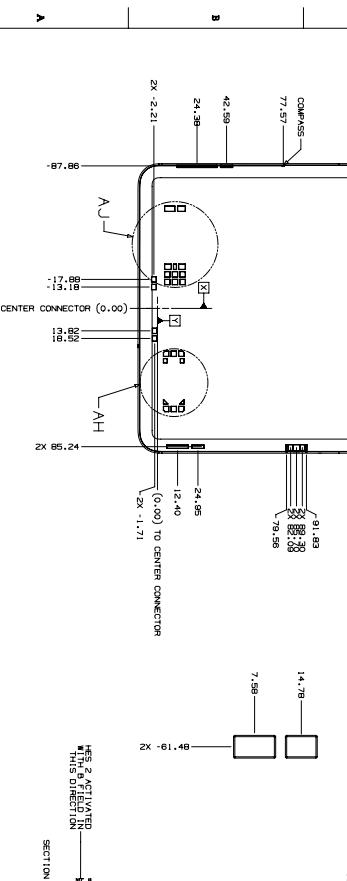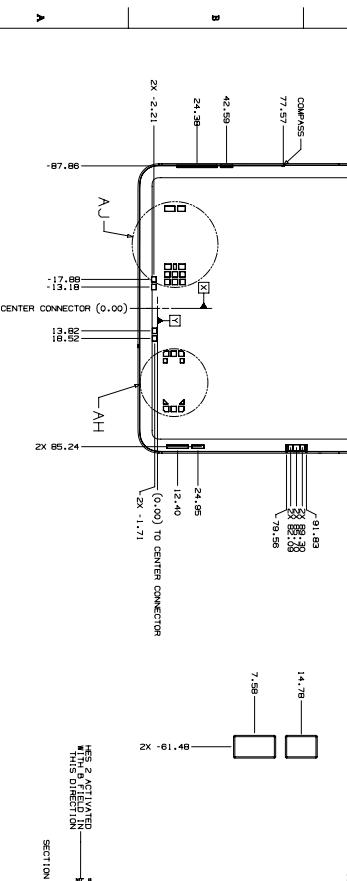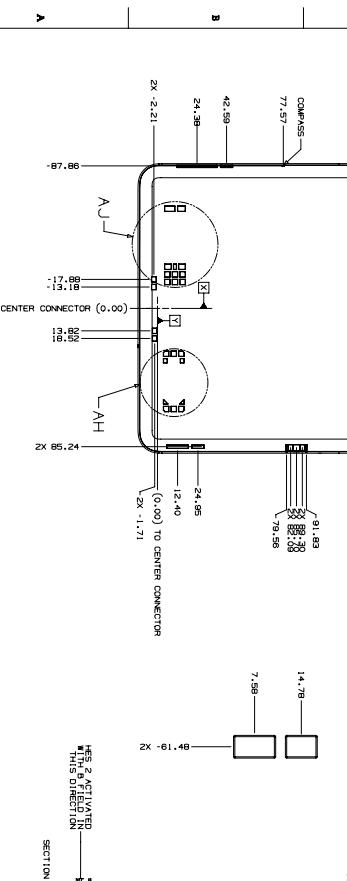

## SECTION AND DETAIL INFORMATION

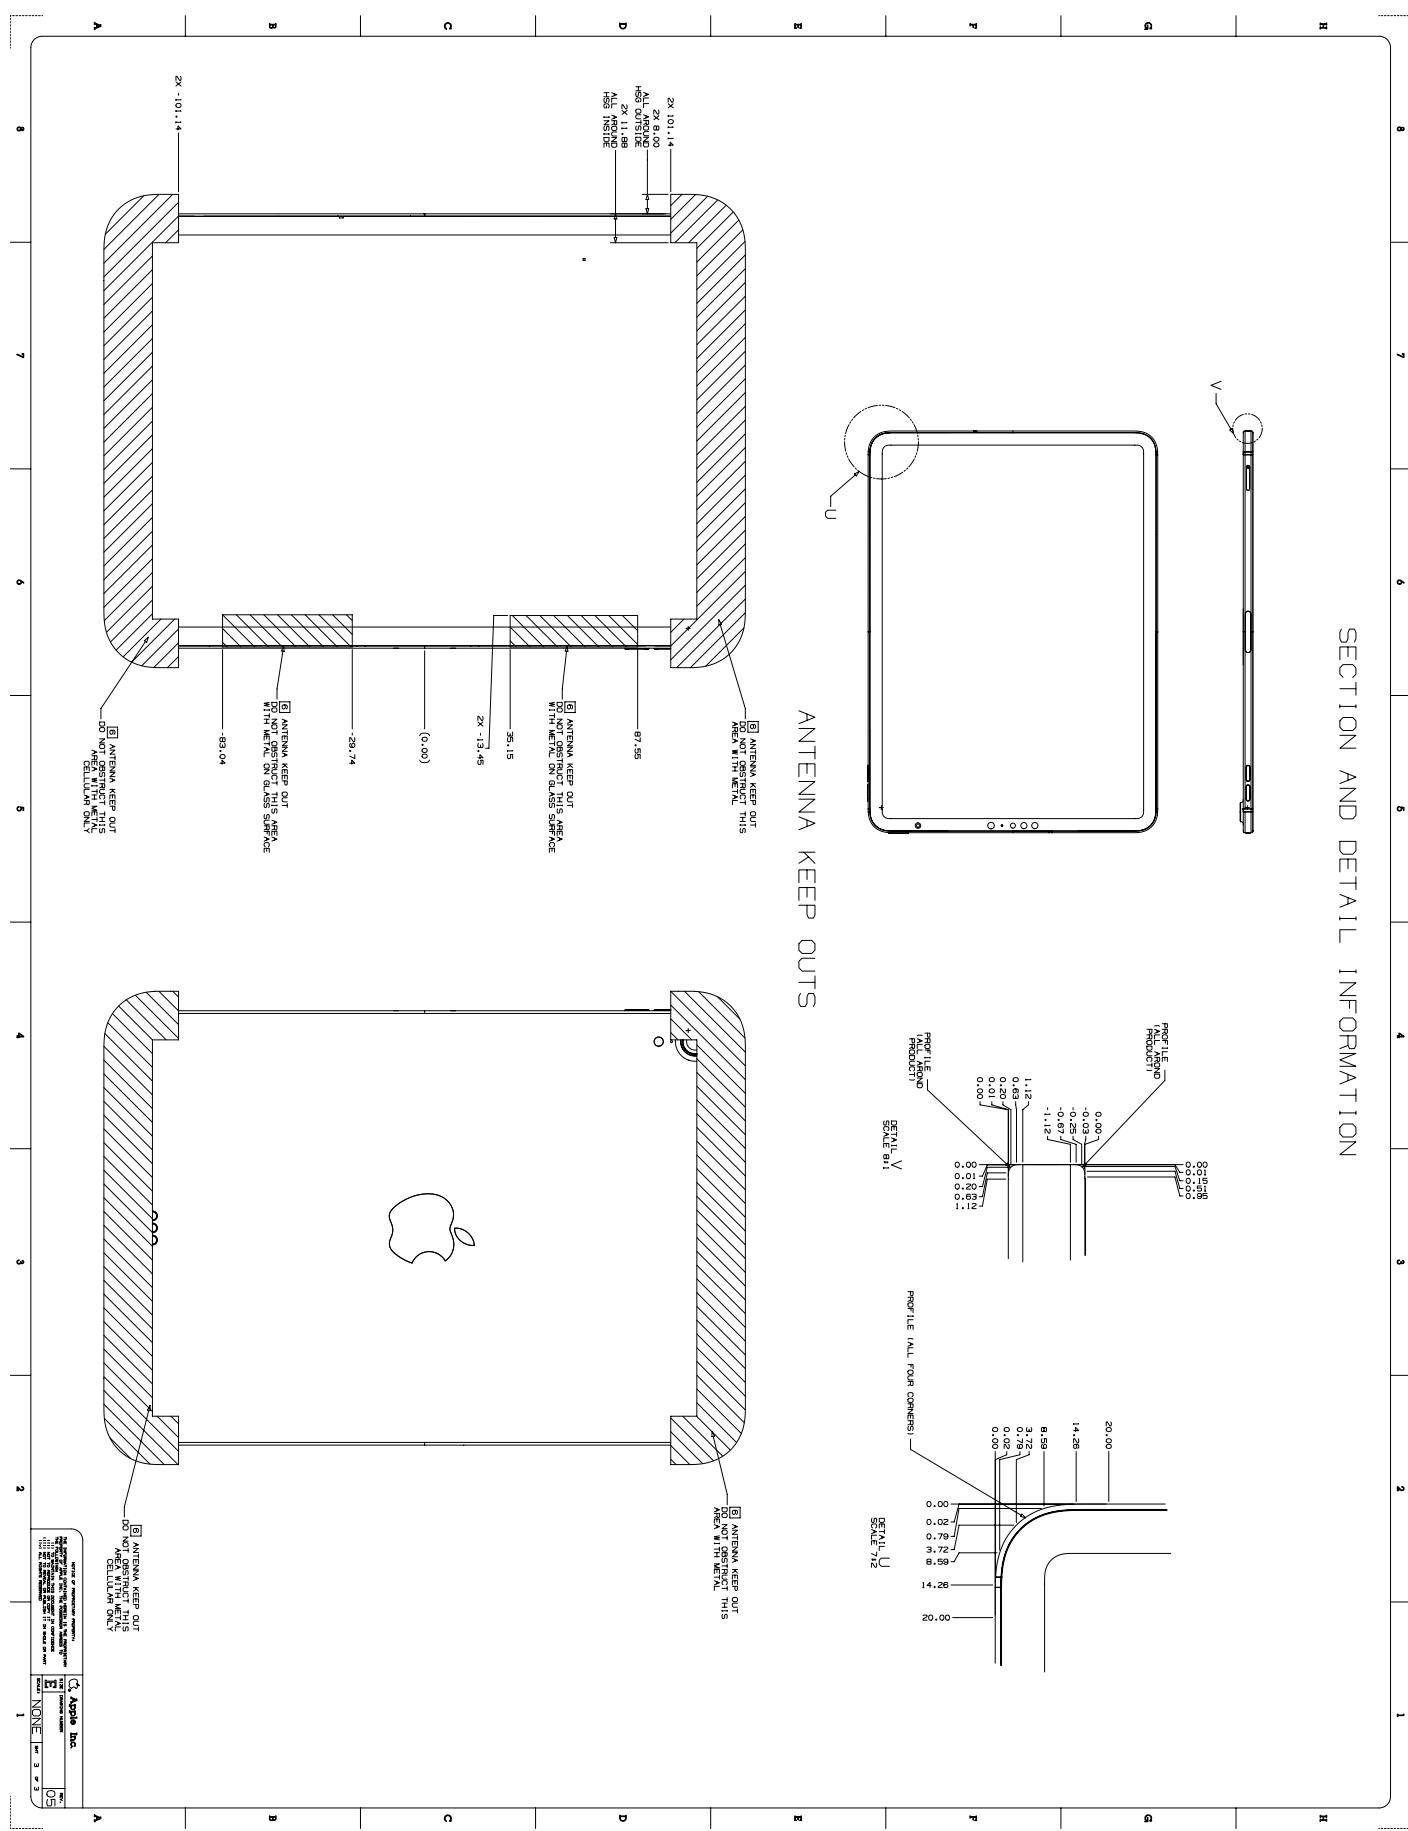












# 29.40 iPad Pro (12.9-inch) 2nd Generation with Wi-Fi

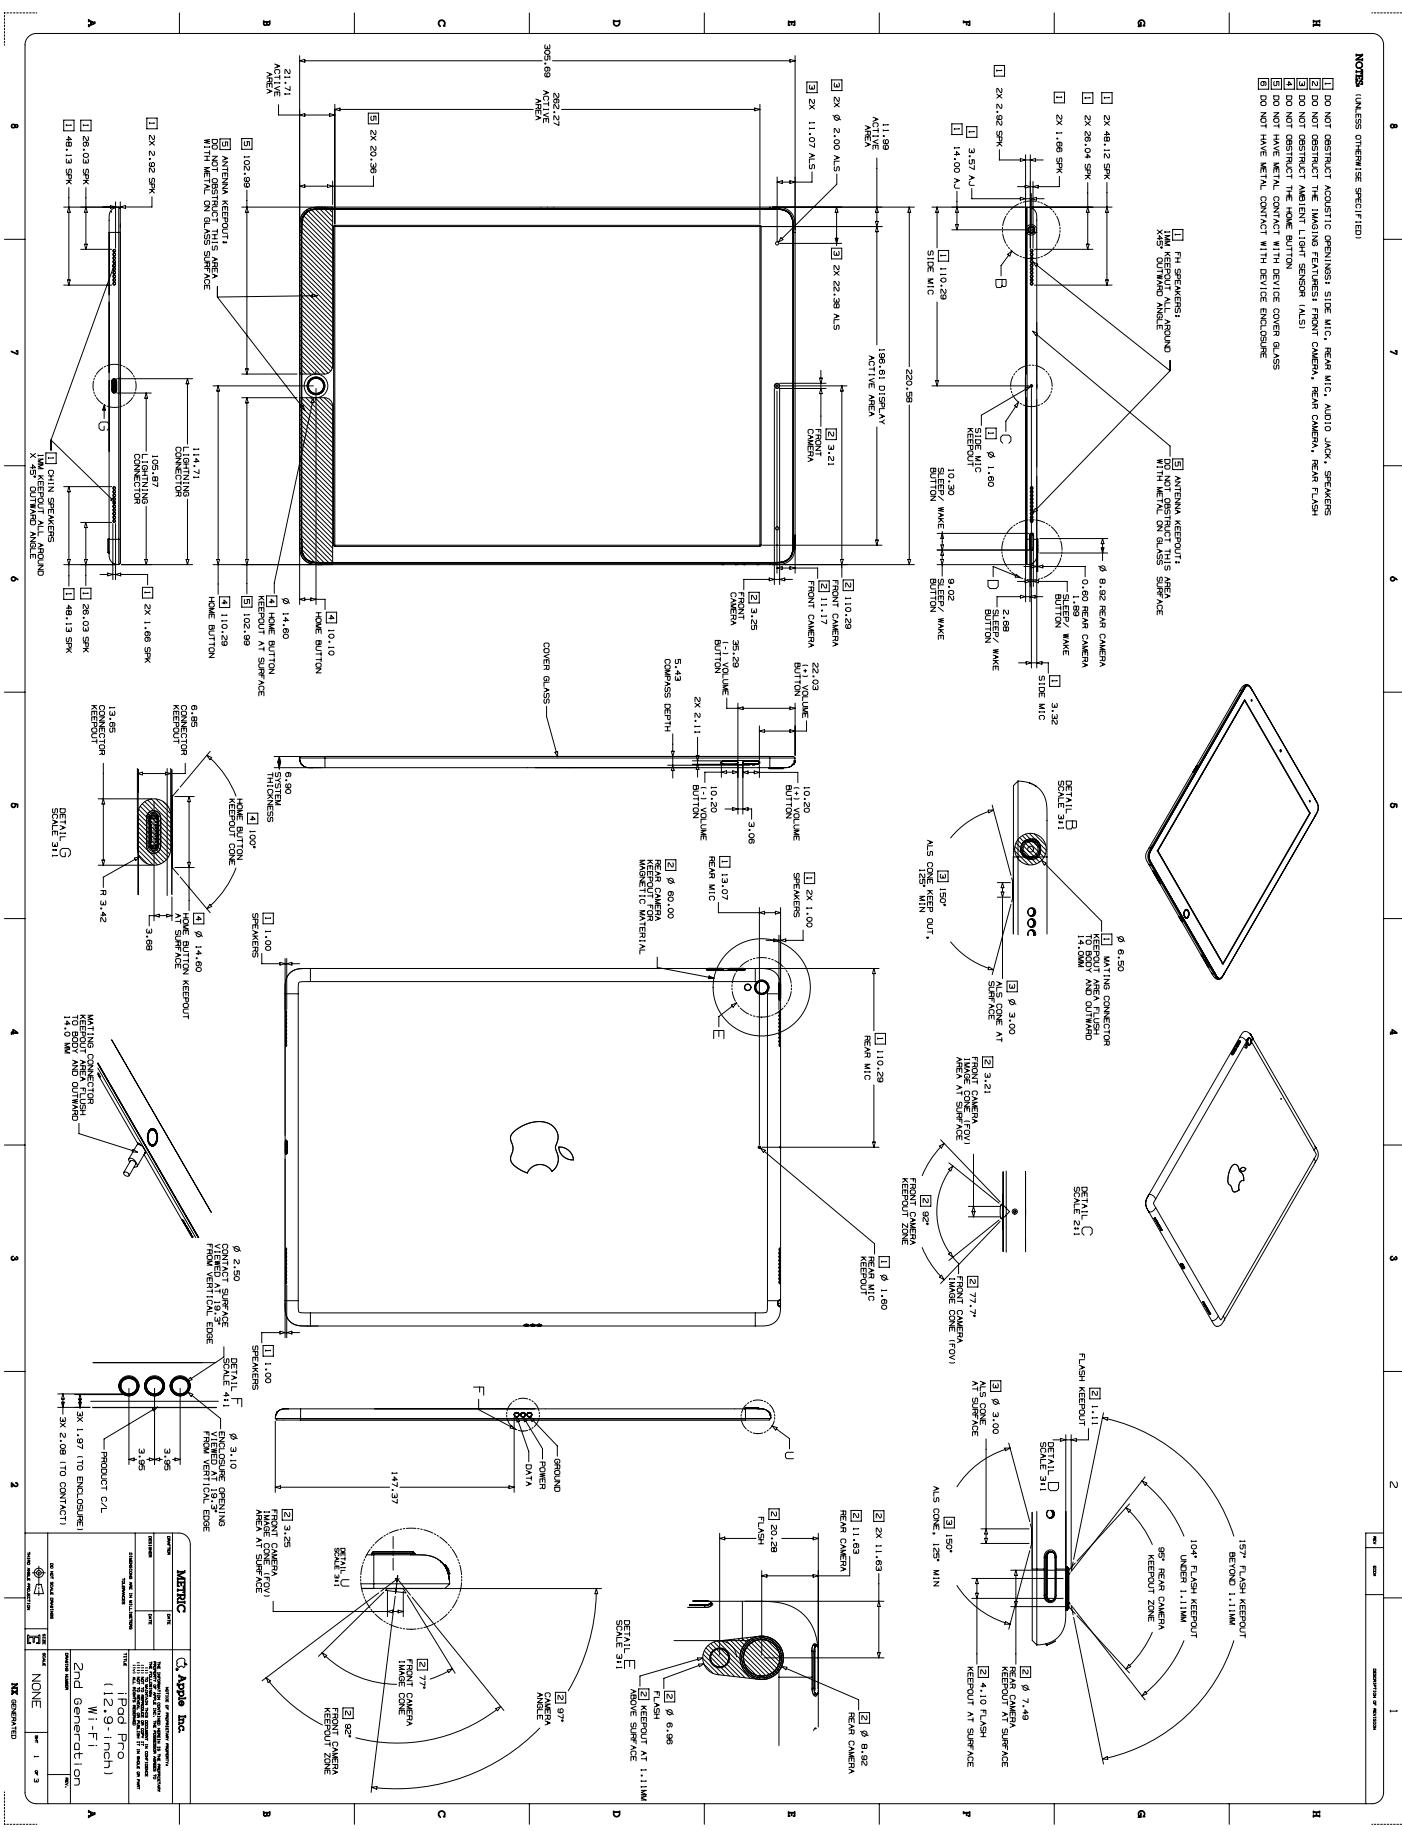

29.41 iPad Pro (12.9-inch) 2nd Generation with Wi-Fi + Cellular


**NOTES (UNLESS OTHERWISE SPECIFIED)**

- 1 DO NOT OBSTRUCT ACOUSTIC OPENINGS! SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
- 2 DO NOT OBSTRUCT THE IMAGING SENSORS: FRONT CAMERA, REAR CAMERA, REAR FLASH
- 3 DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS).
- 4 DO NOT OBSTRUCT THE HOME BUTTON.
- 5 DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS.
- 6 DO NOT HAVE METAL CONTACT WITH DEVICE ENCLOSURE.

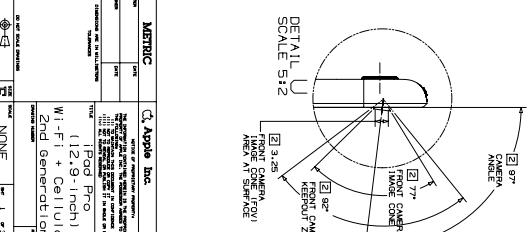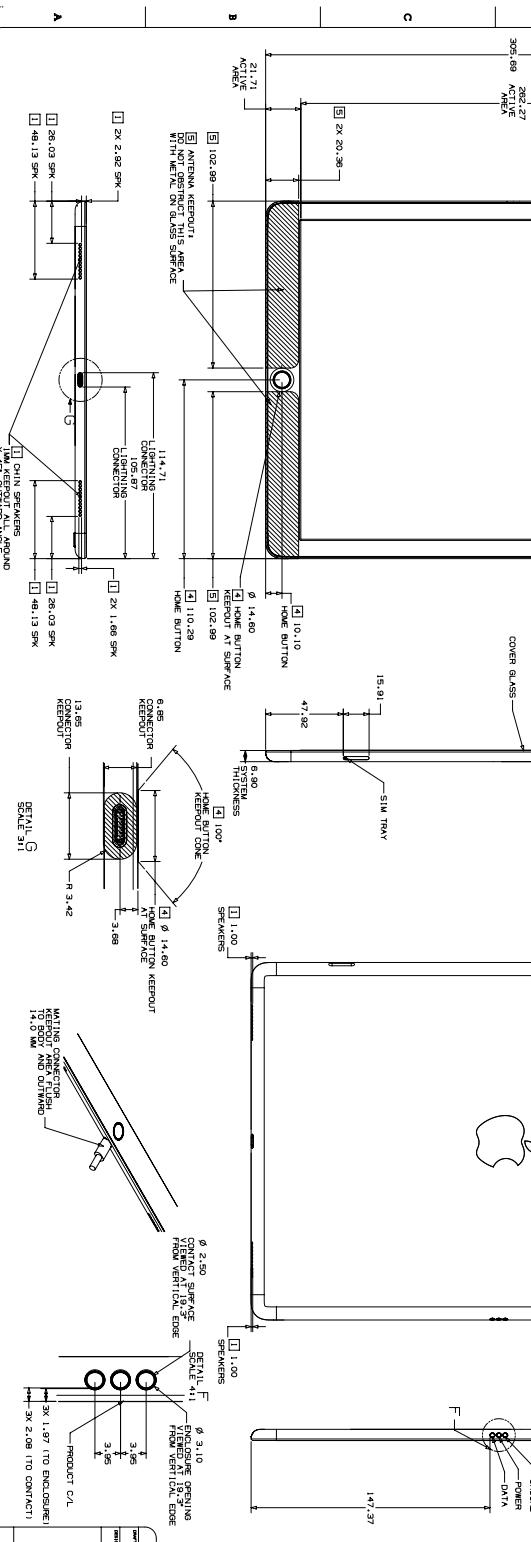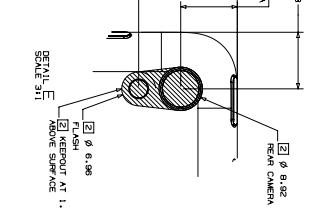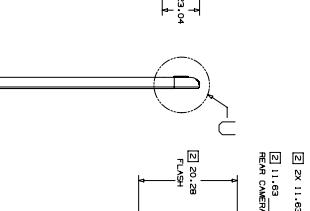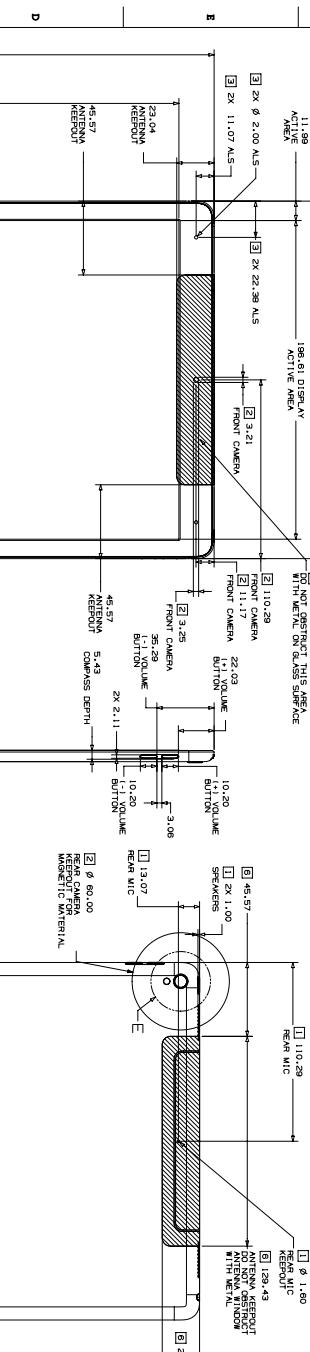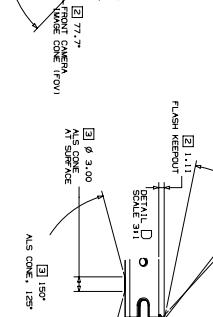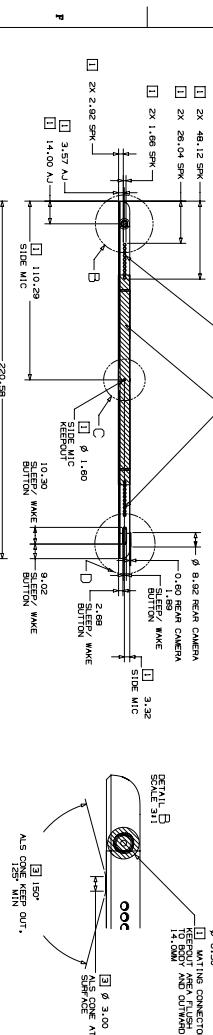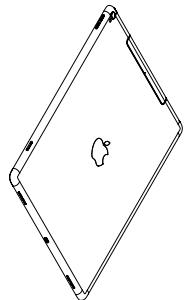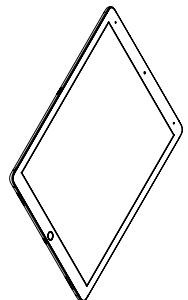


## 29.42 iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 1 of 2

POLARITY COVER FLAP MAGNET DETAIL SURFACE  
DIMENSIONS SHOWN NORMAL TO DISPLAY CENTERLINE OF PRODUCT  
"N" = NORTH  
"S" = SOUTH

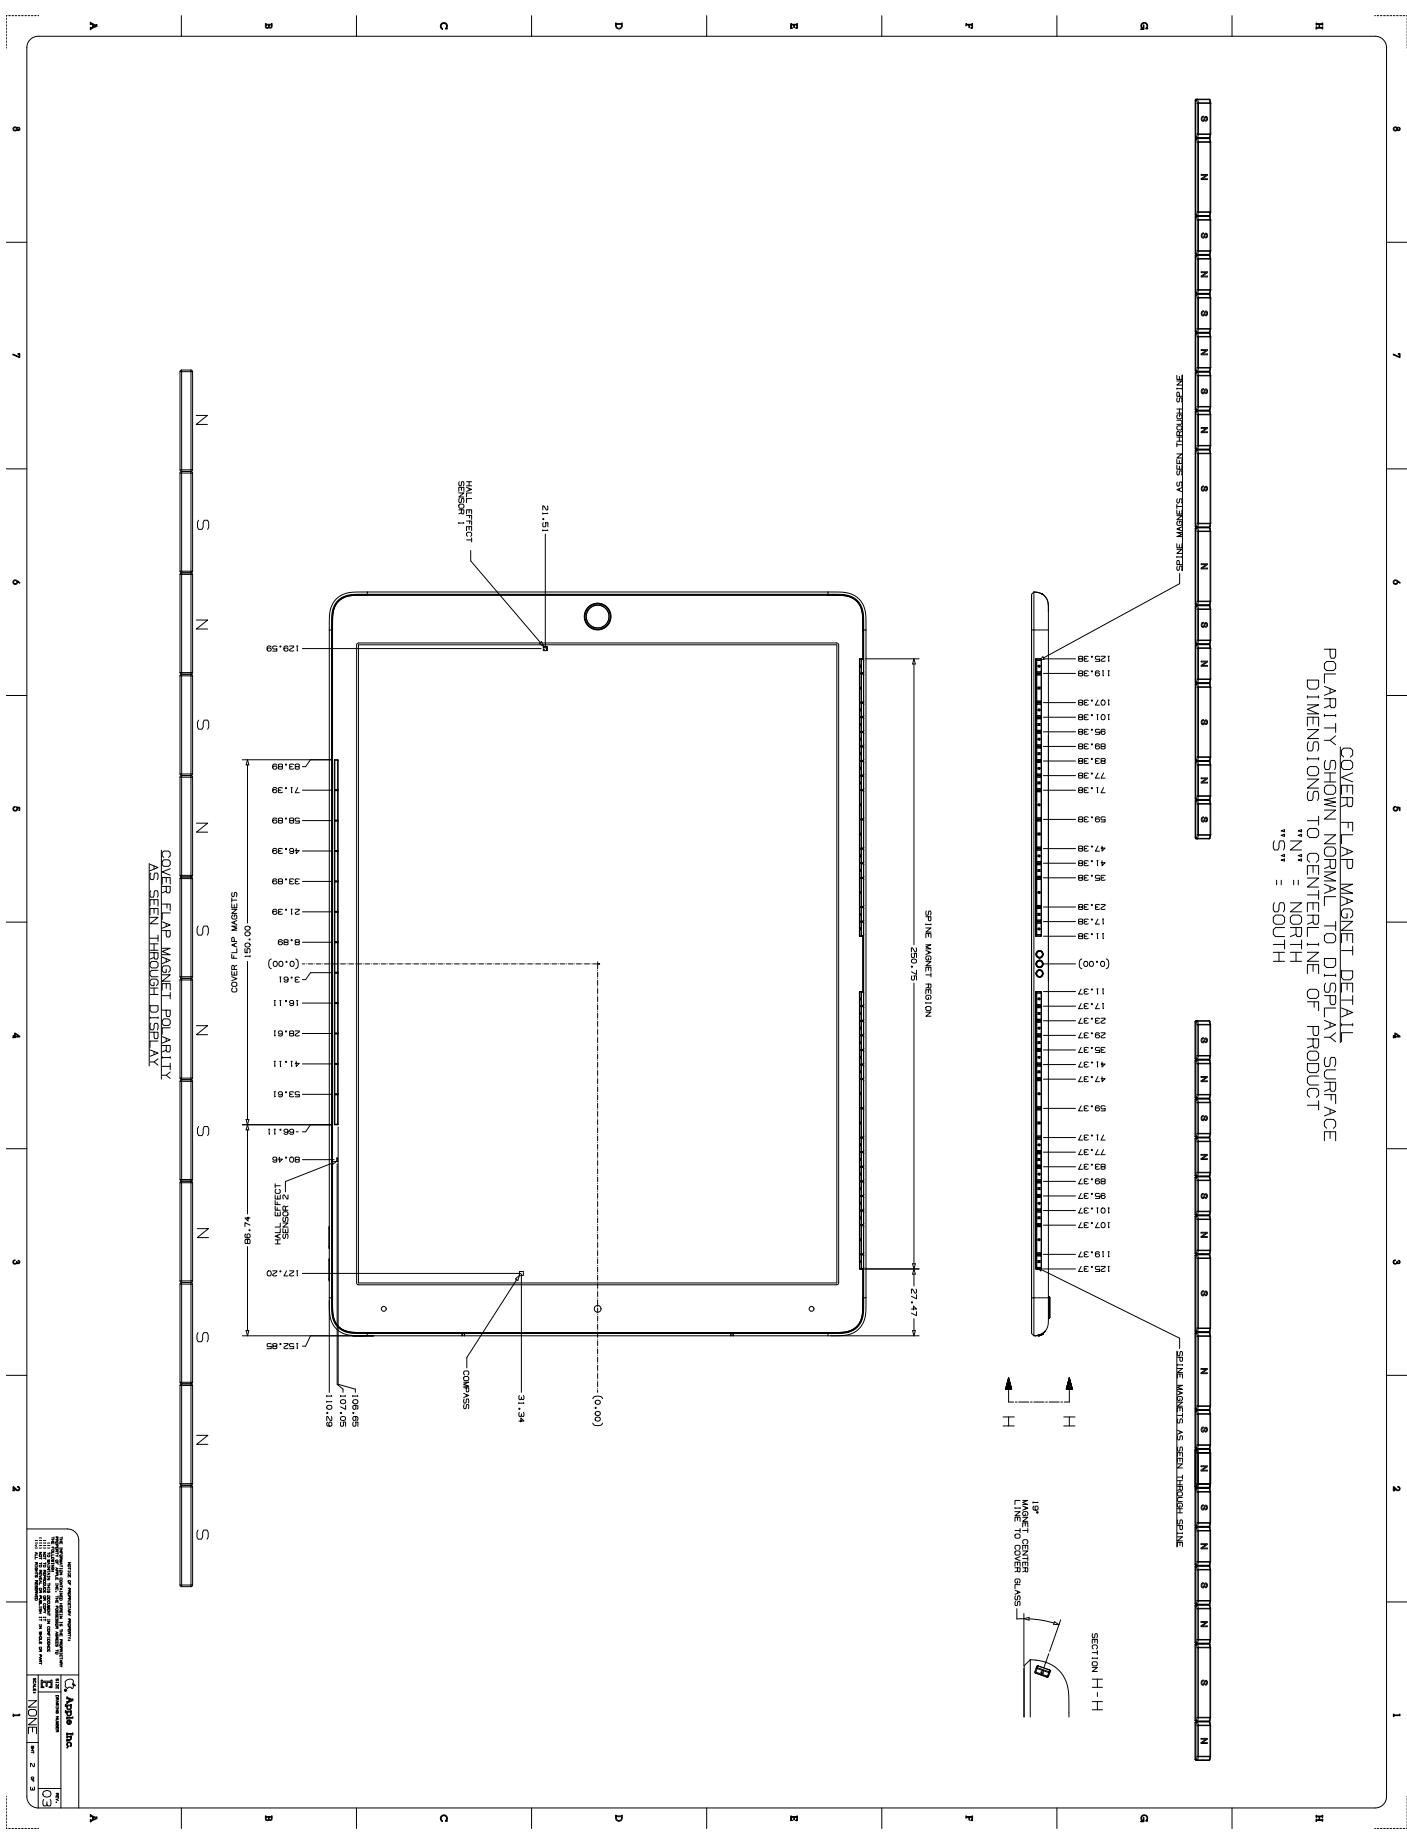




# 29.43 iPad Pro (12.9-inch) 2nd Generation Magnet/Hall Effect Sensors 2 of 2

## SECTION AND DETAIL INFORMATION

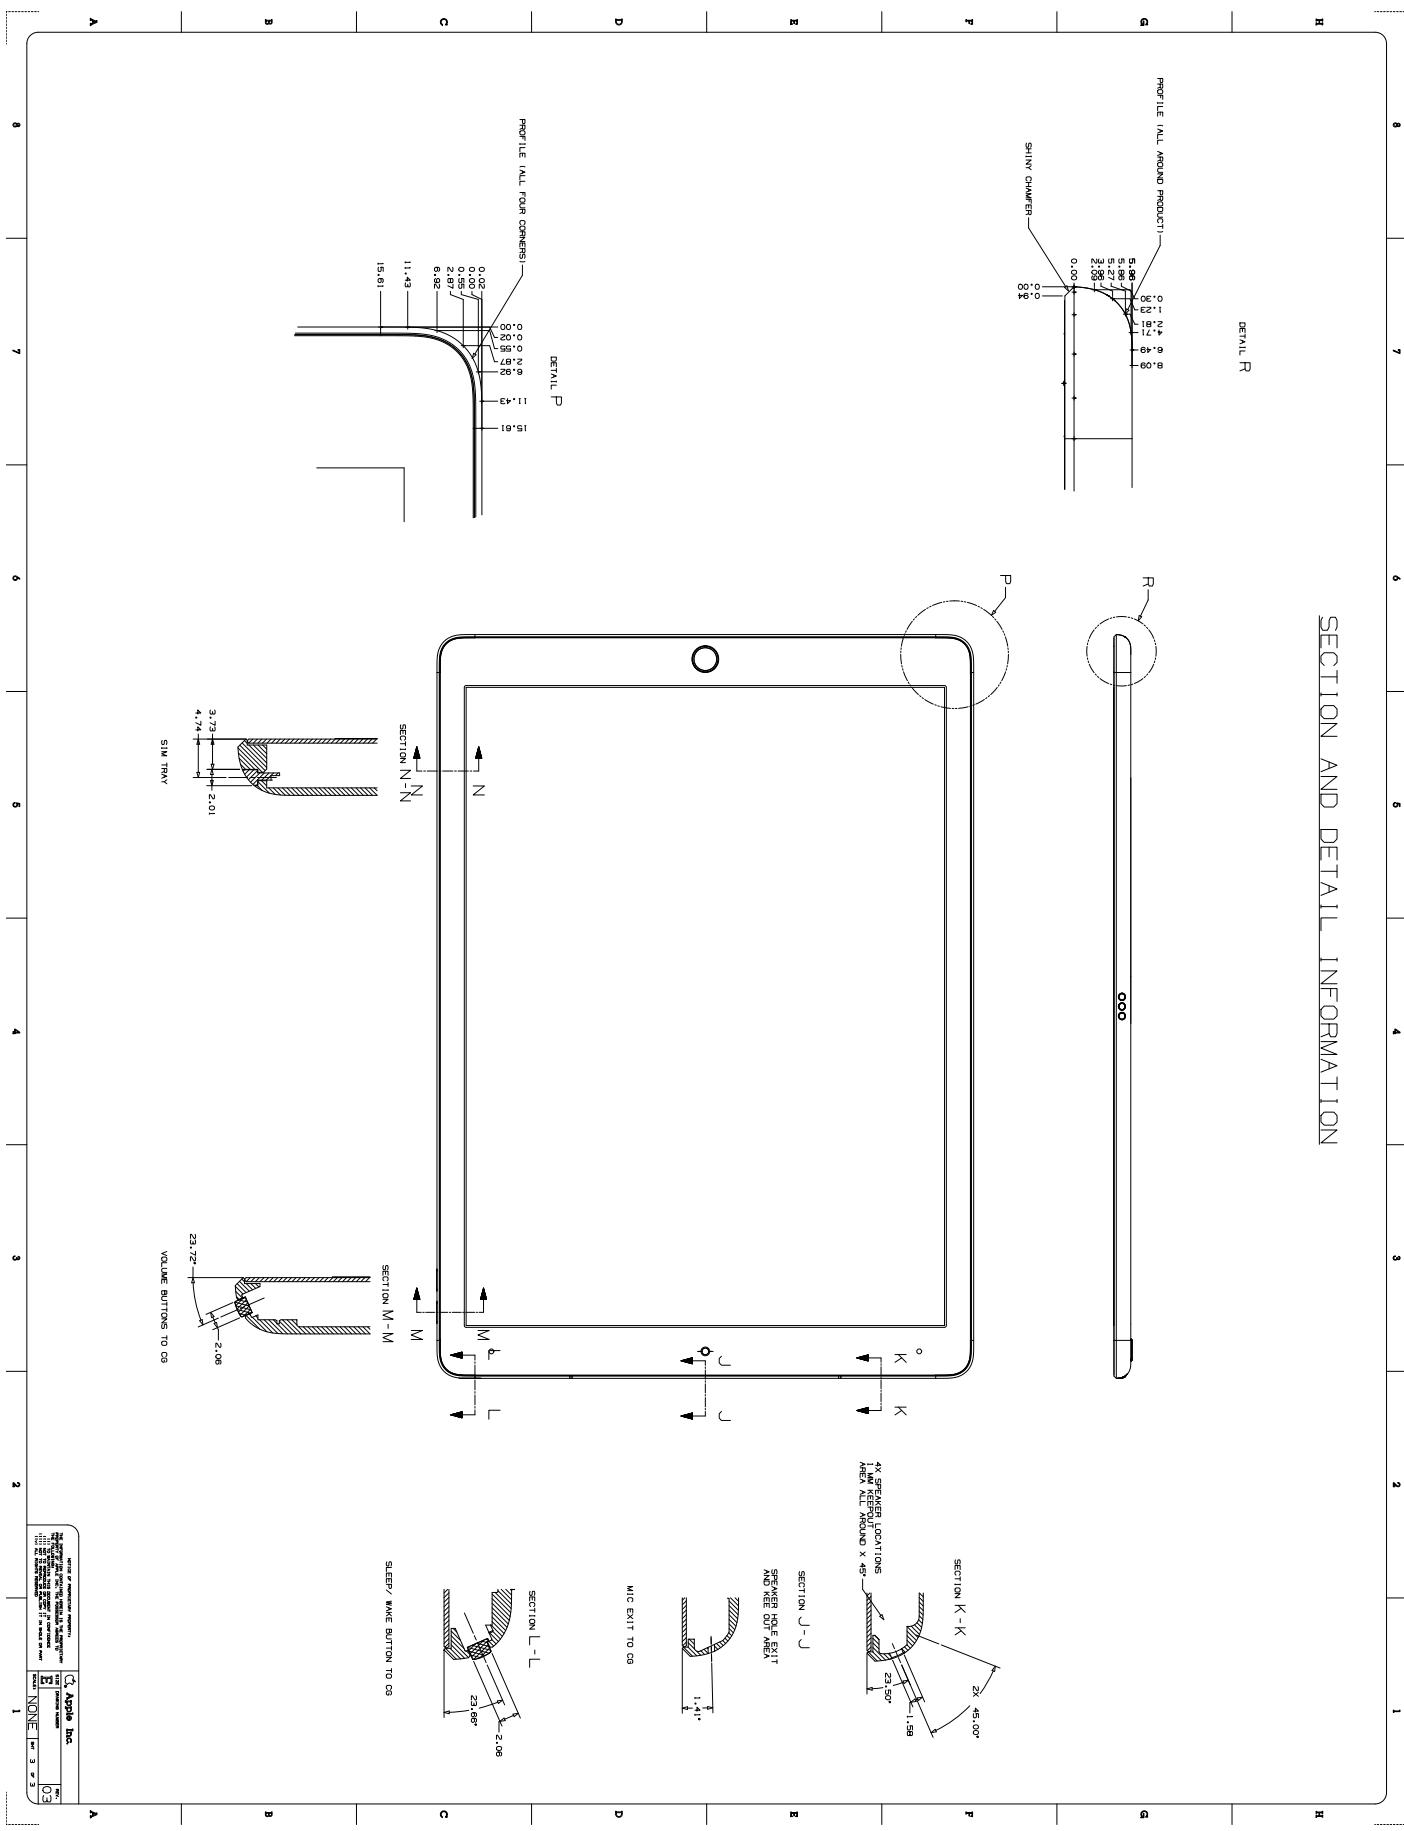

29.44 iPad Pro (10.5-inch) with Wi-Fi



- DO NOT OBSTRUCT THE IMAGING TENTS/FRONT CAMERA, REAR CAMERA, REAR FLASH
- DO NOT DESTROY AND/OR LIGHT SENSORS (ALERT)
- DO NOT OBSTRUCT THE HOME BUTTON
- DO NOT HAVE METAL CONTACT WITH DEVICE COVER GLASS

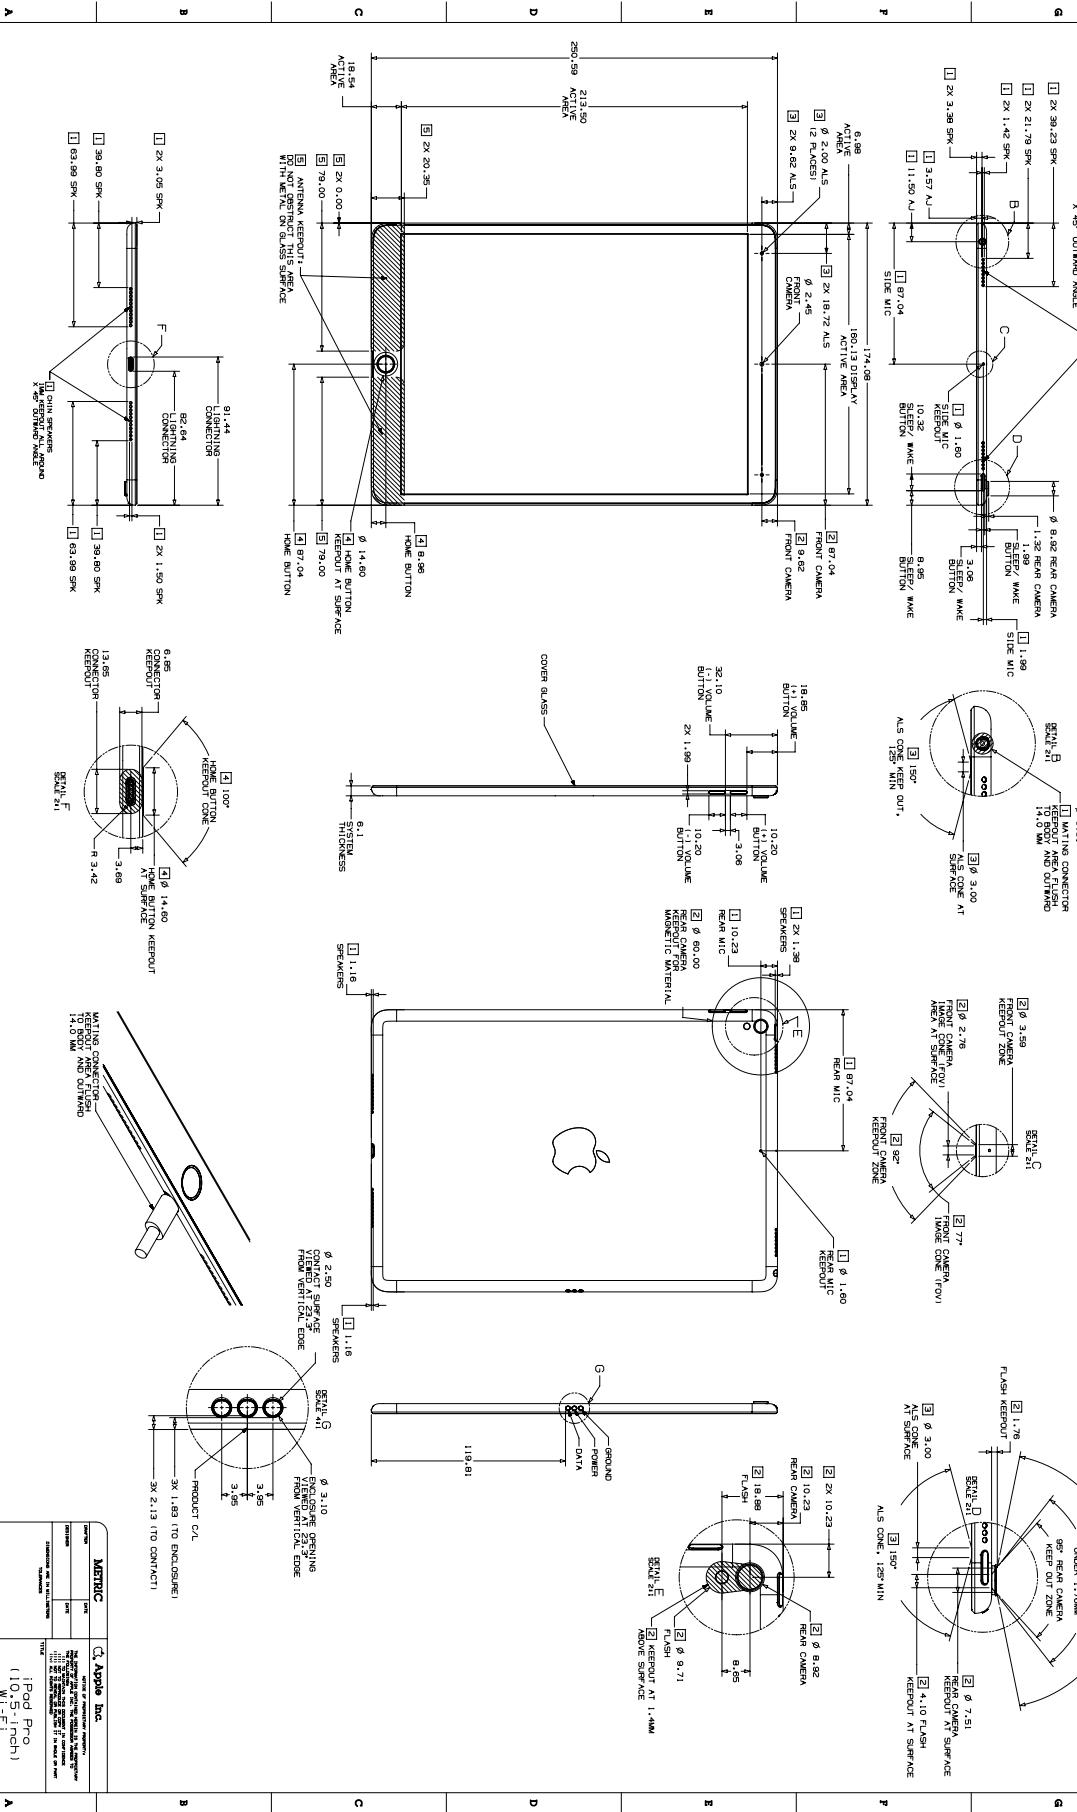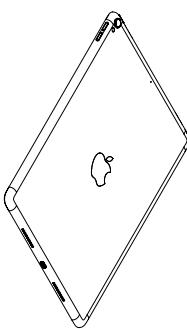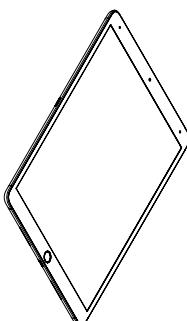

# 29.45 iPad Pro (10.5-inch) with Wi-Fi + Cellular


**NOTES:**

- [1] DO NOT OBSTRUCT ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
- [2] DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA, REAR FLASH
- [3] DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS)
- [4] DO NOT OBSTRUCT THE HOME BUTTON
- [5] DO NOT HAVE METAL CONTACT WITH DEVICE EXOSURE




R


8  
7  
6  
5  
4  
3  
2  
1

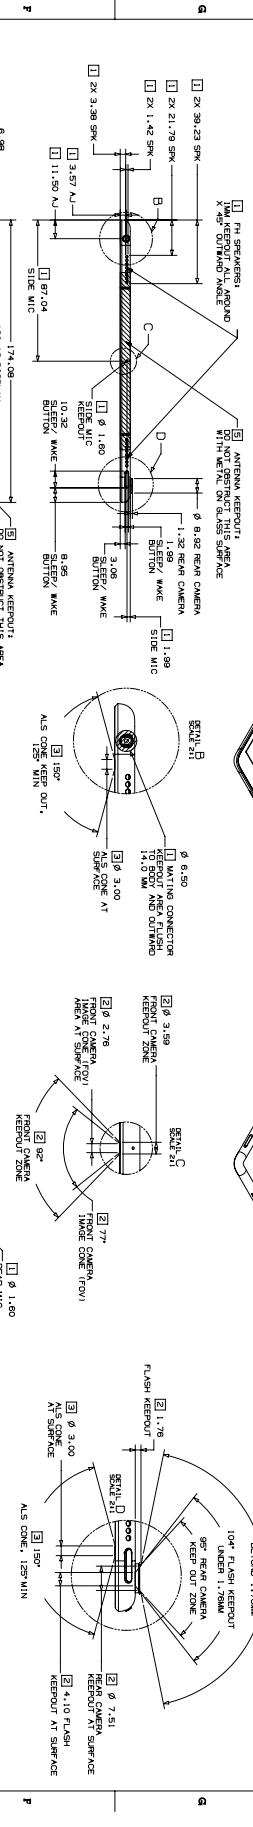


G  
F  
E  
D  
C  
B  
A

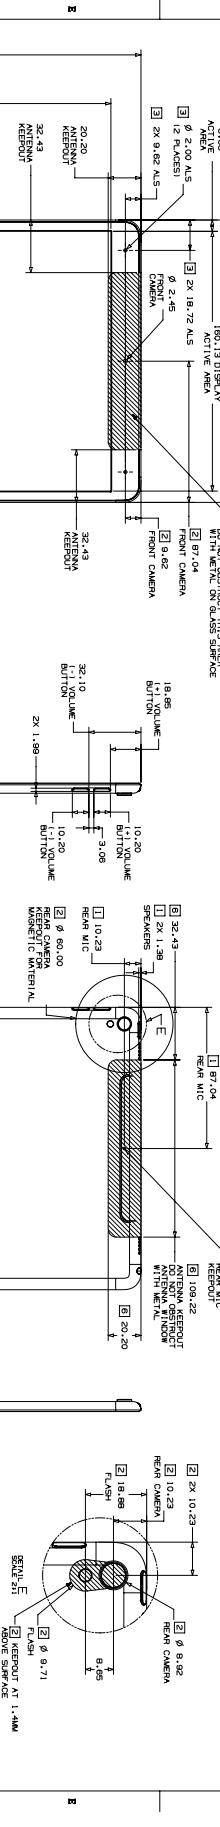


G  
F  
E  
D  
C  
B  
A

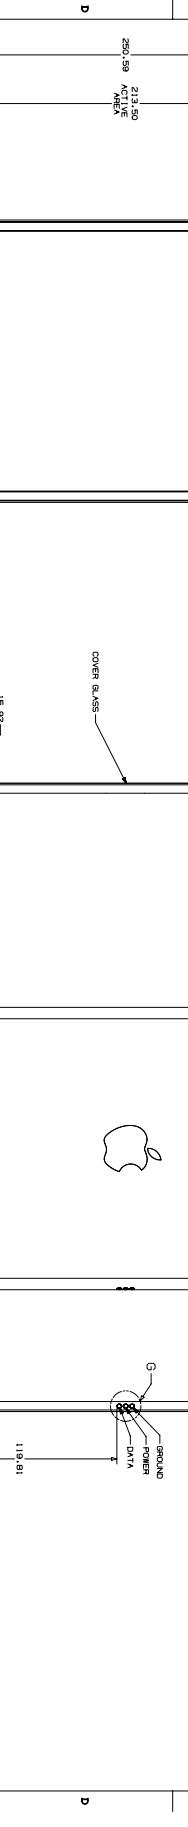

G  
F  
E  
D  
C  
B  
A

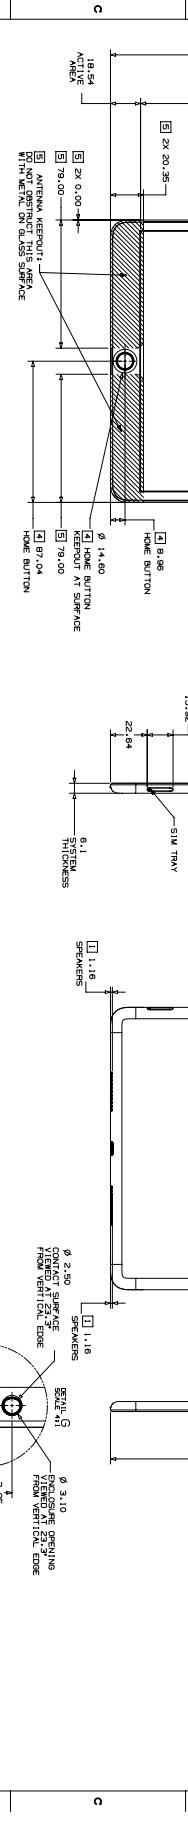

G  
F  
E  
D  
C  
B  
A

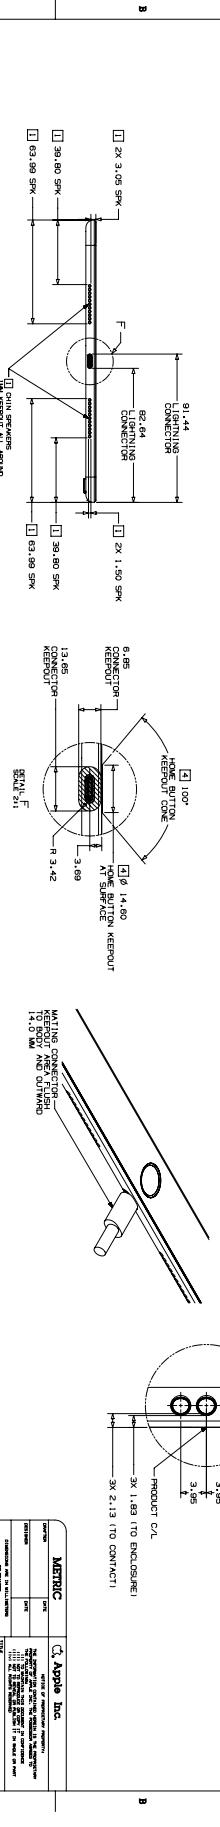


G  
F  
E  
D  
C  
B  
A

8  
7  
6  
5  
4  
3  
2  
1

# 29.46 iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 1 of 2

POLYURETHANE SPINE MAGNET DETAILS  
DIMENSIONS IN MM  
REF ID: 300TH

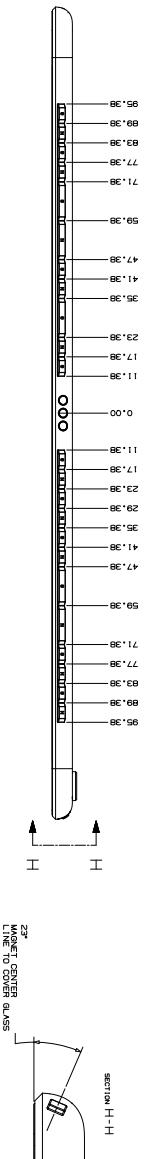

SPINE MAGNET REGION

190.75



mm

2.27

mm

LINE TO COVER GLASS

mm

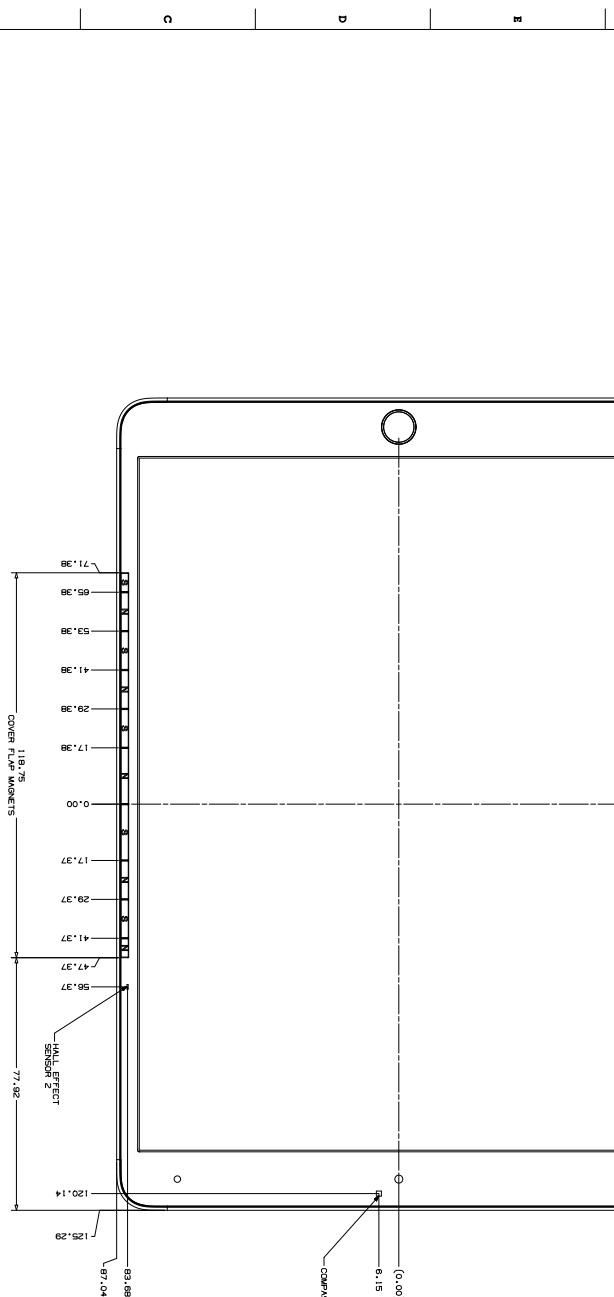

COVER FLAP MAGNETS

HALL EFFECT

SENSOR 2

1120.1

mm

62.92

mm

83.68

mm

67.04

mm

113.41

mm

29.92

mm

6.15

mm

(0.06)

mm

111.38

mm

117.38

mm

111.38

mm


117.38

mm

111.38

29.47 iPad Pro (10.5-inch) Magnet/Hall Effect Sensors 2 of 2

## SECTION AND DETAIL INFORMATION





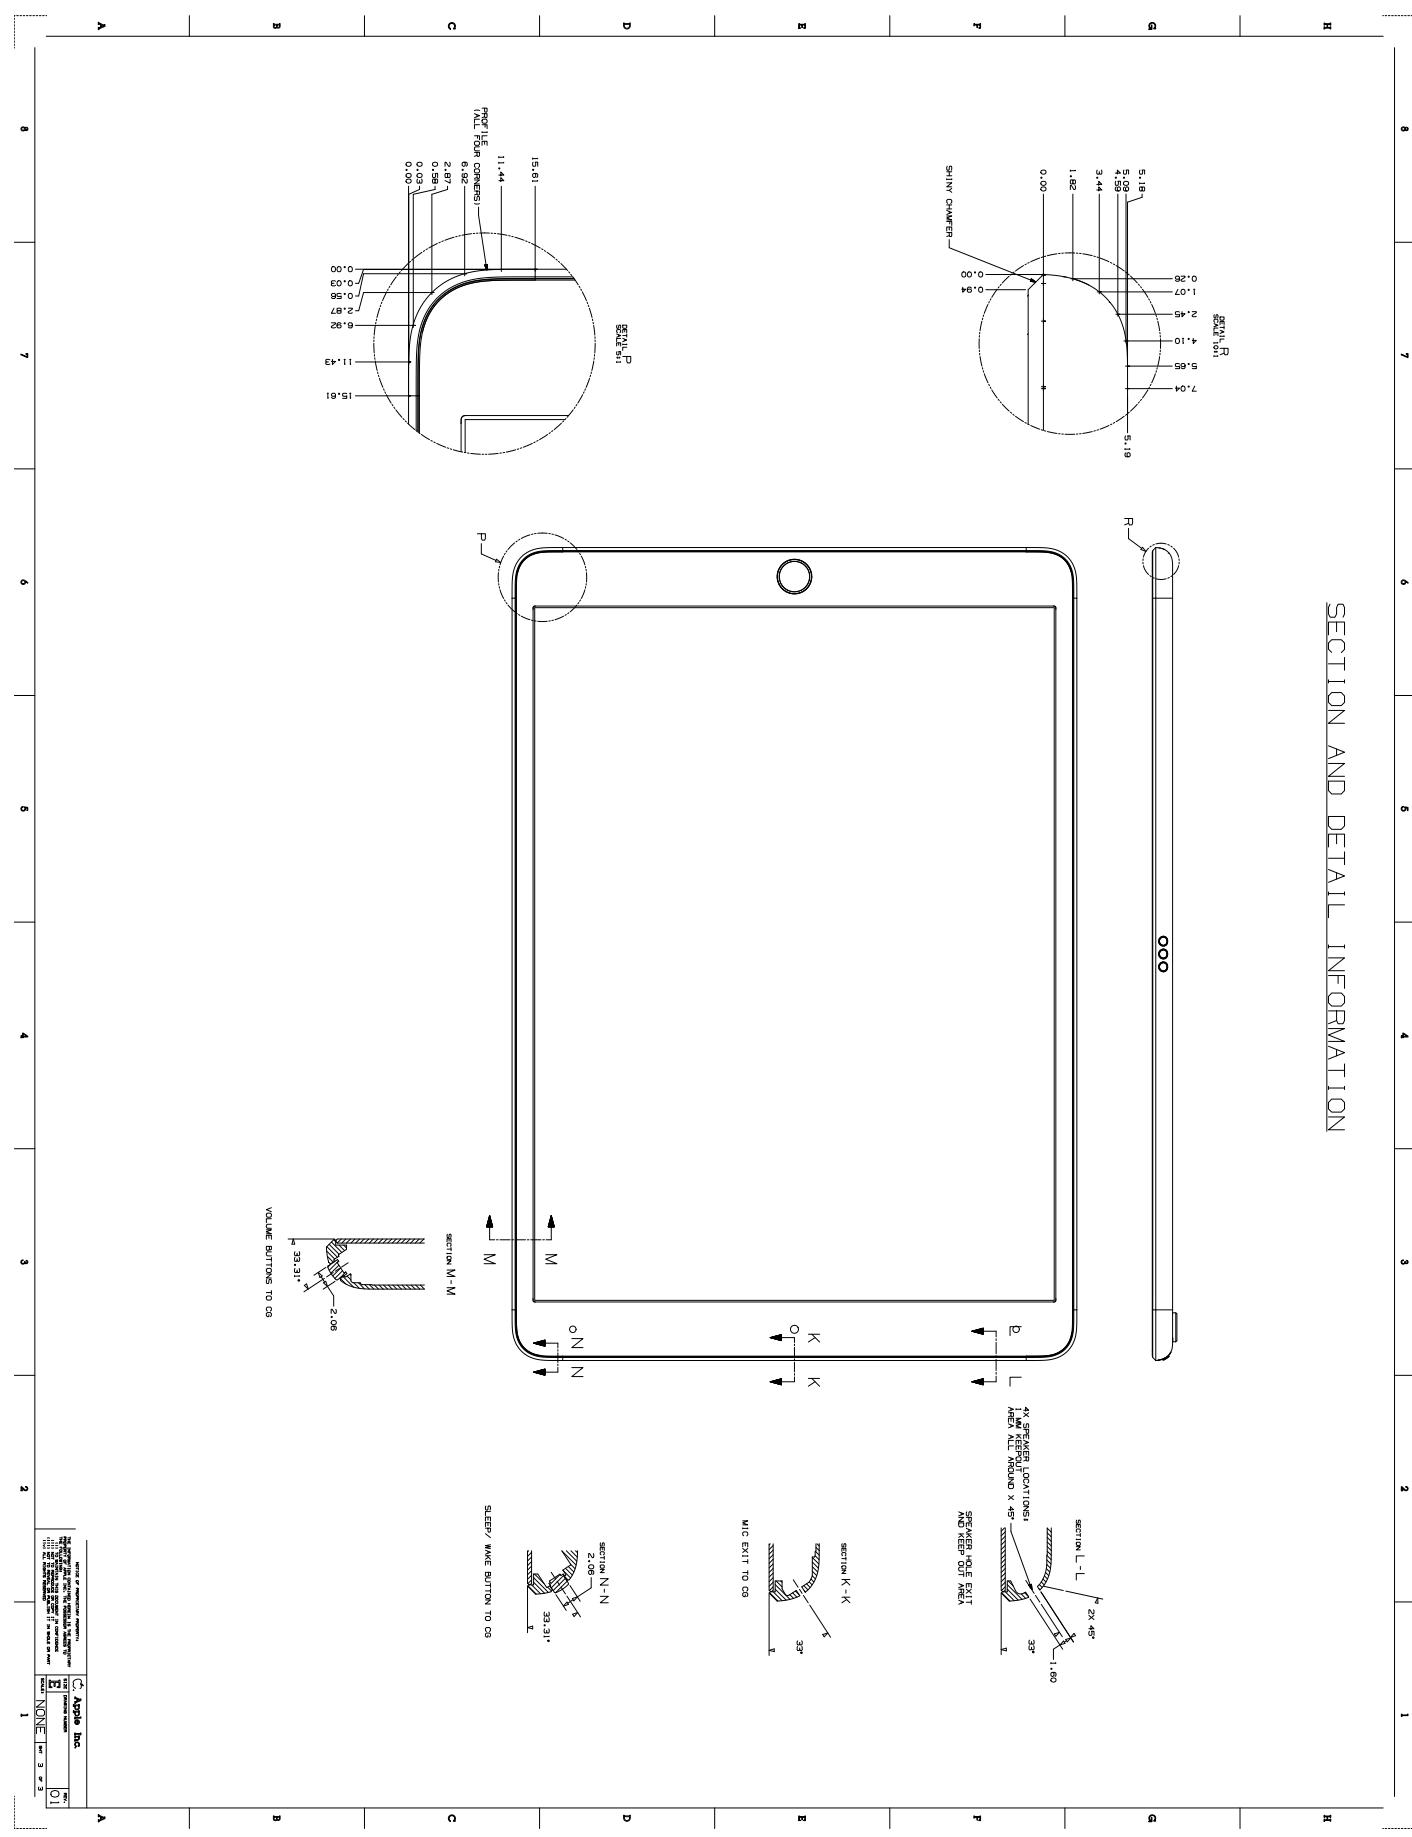


29.48 iPad (5th and 6th generation) with Wi-Fi + Cellular


**NOTES. (UNLESS OTHERWISE SPECIFIED)**

- DO NOT OBSTRUCT ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
  - DO NOT OBSTRUCT IMAGING FEATURES: FRONT CAMERA, REAR CAMERA  
(ALS)
  - DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS)
  - DO NOT OBSTRUCT THE HOME BUTTON
  - DO NOT OBSTRUCT GLASS WITH METAL
  - DO NOT OBSTRUCT ENCLOSURE WITH METAL  
Ø 1.60
  - CELLULAR SYSTEM ONLY


5 & 7  
ANTENNA KEEPOUT  
DO NOT OBSTRUCT THIS  
AREA WITH METAL

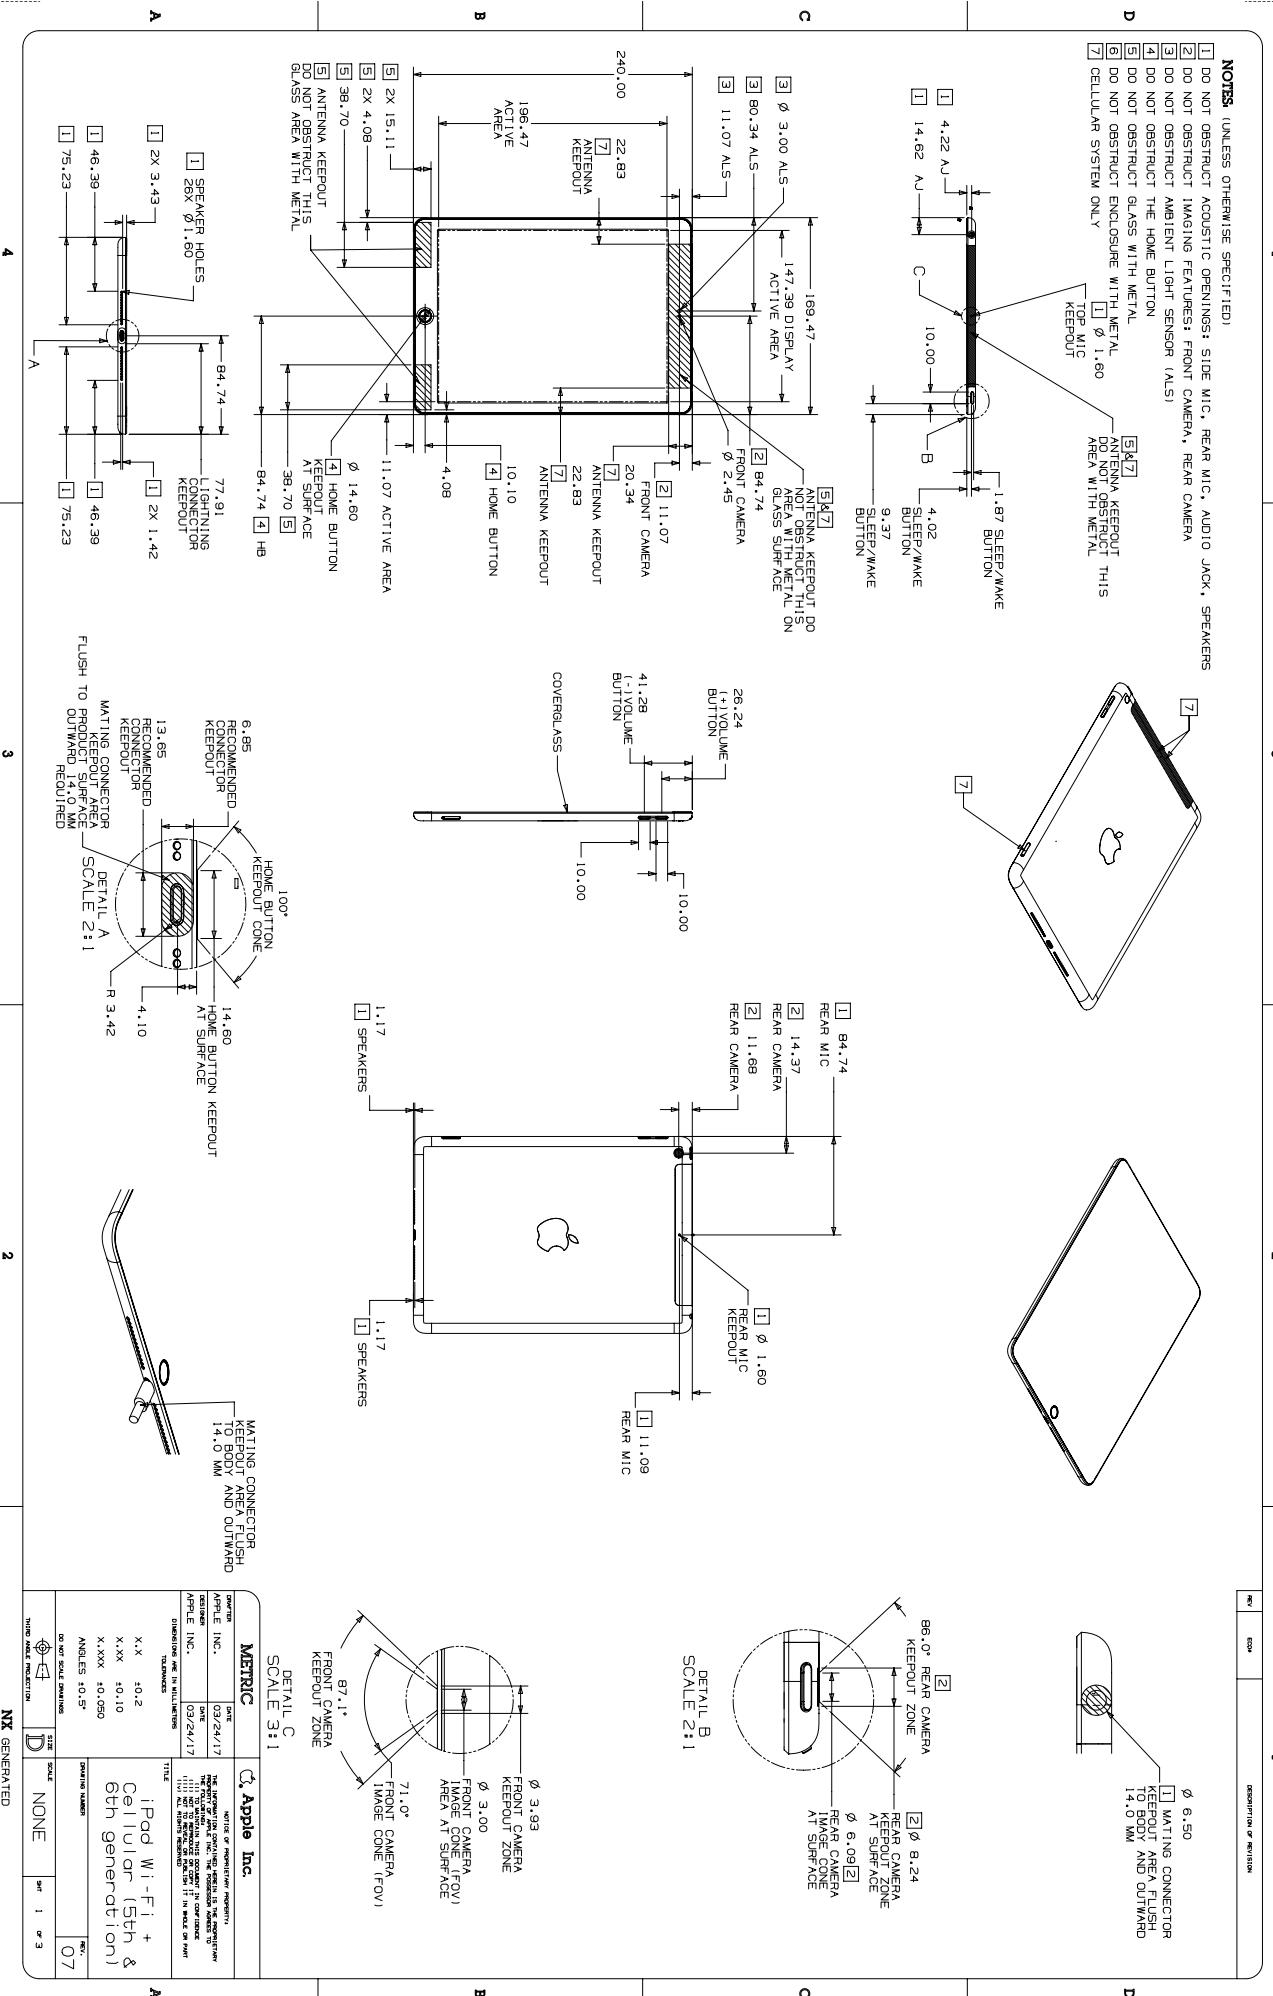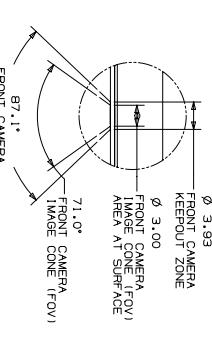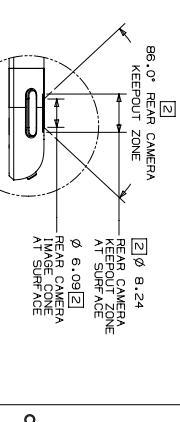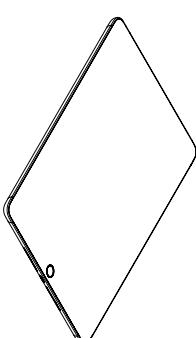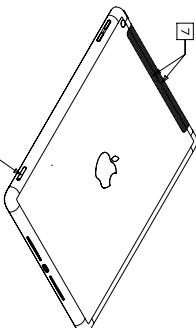

29.49 iPad (5th and 6th generation) Magnet/Hall Effect Sensors 1 of 2

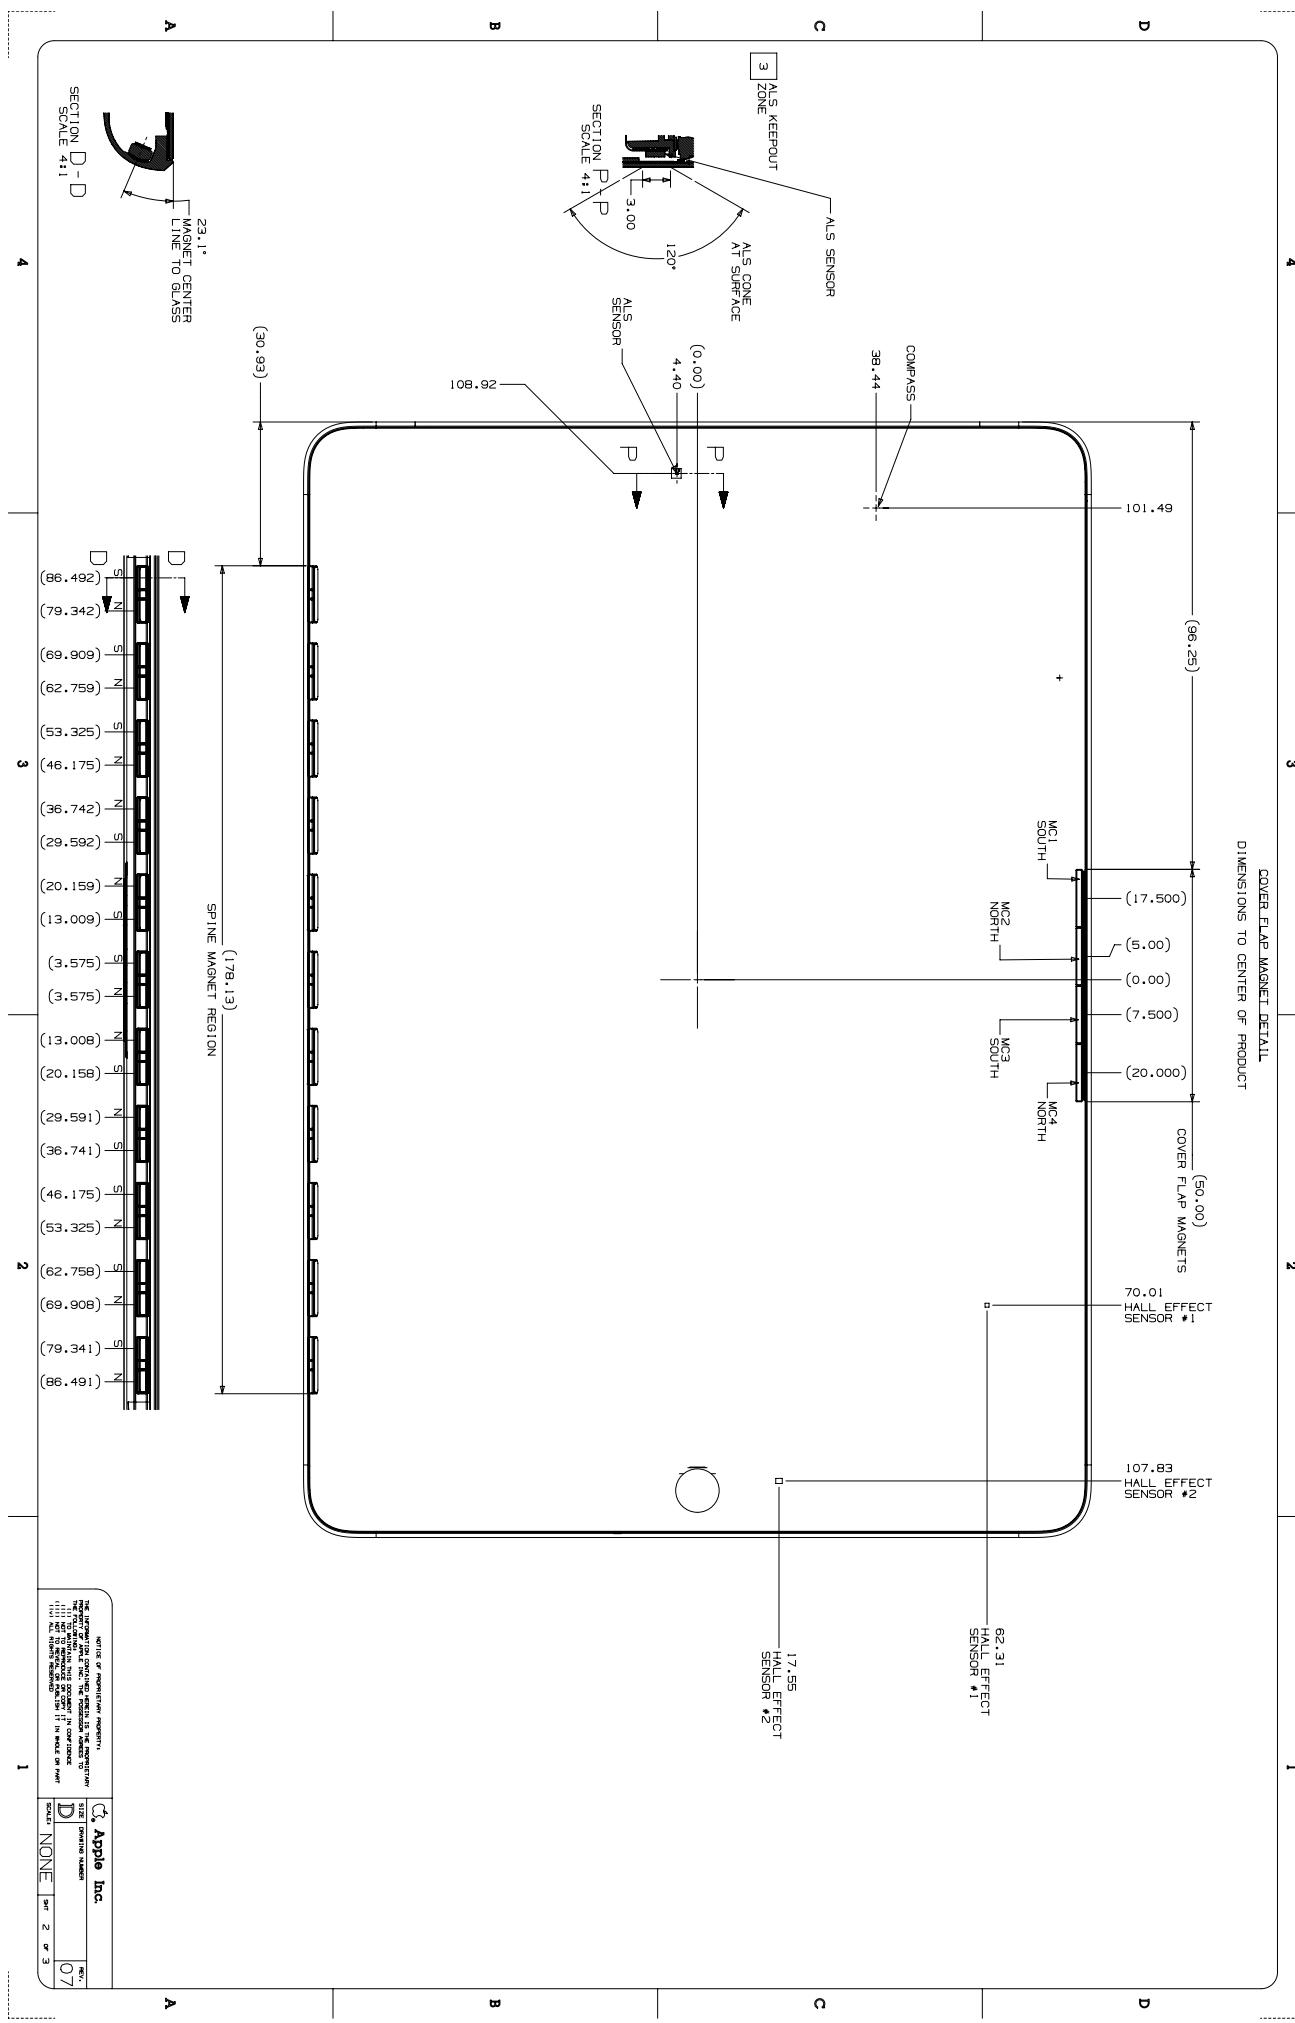


# 29.50 iPad (5th and 6th generation) Magnet/Hall Effect Sensors 2 of 2

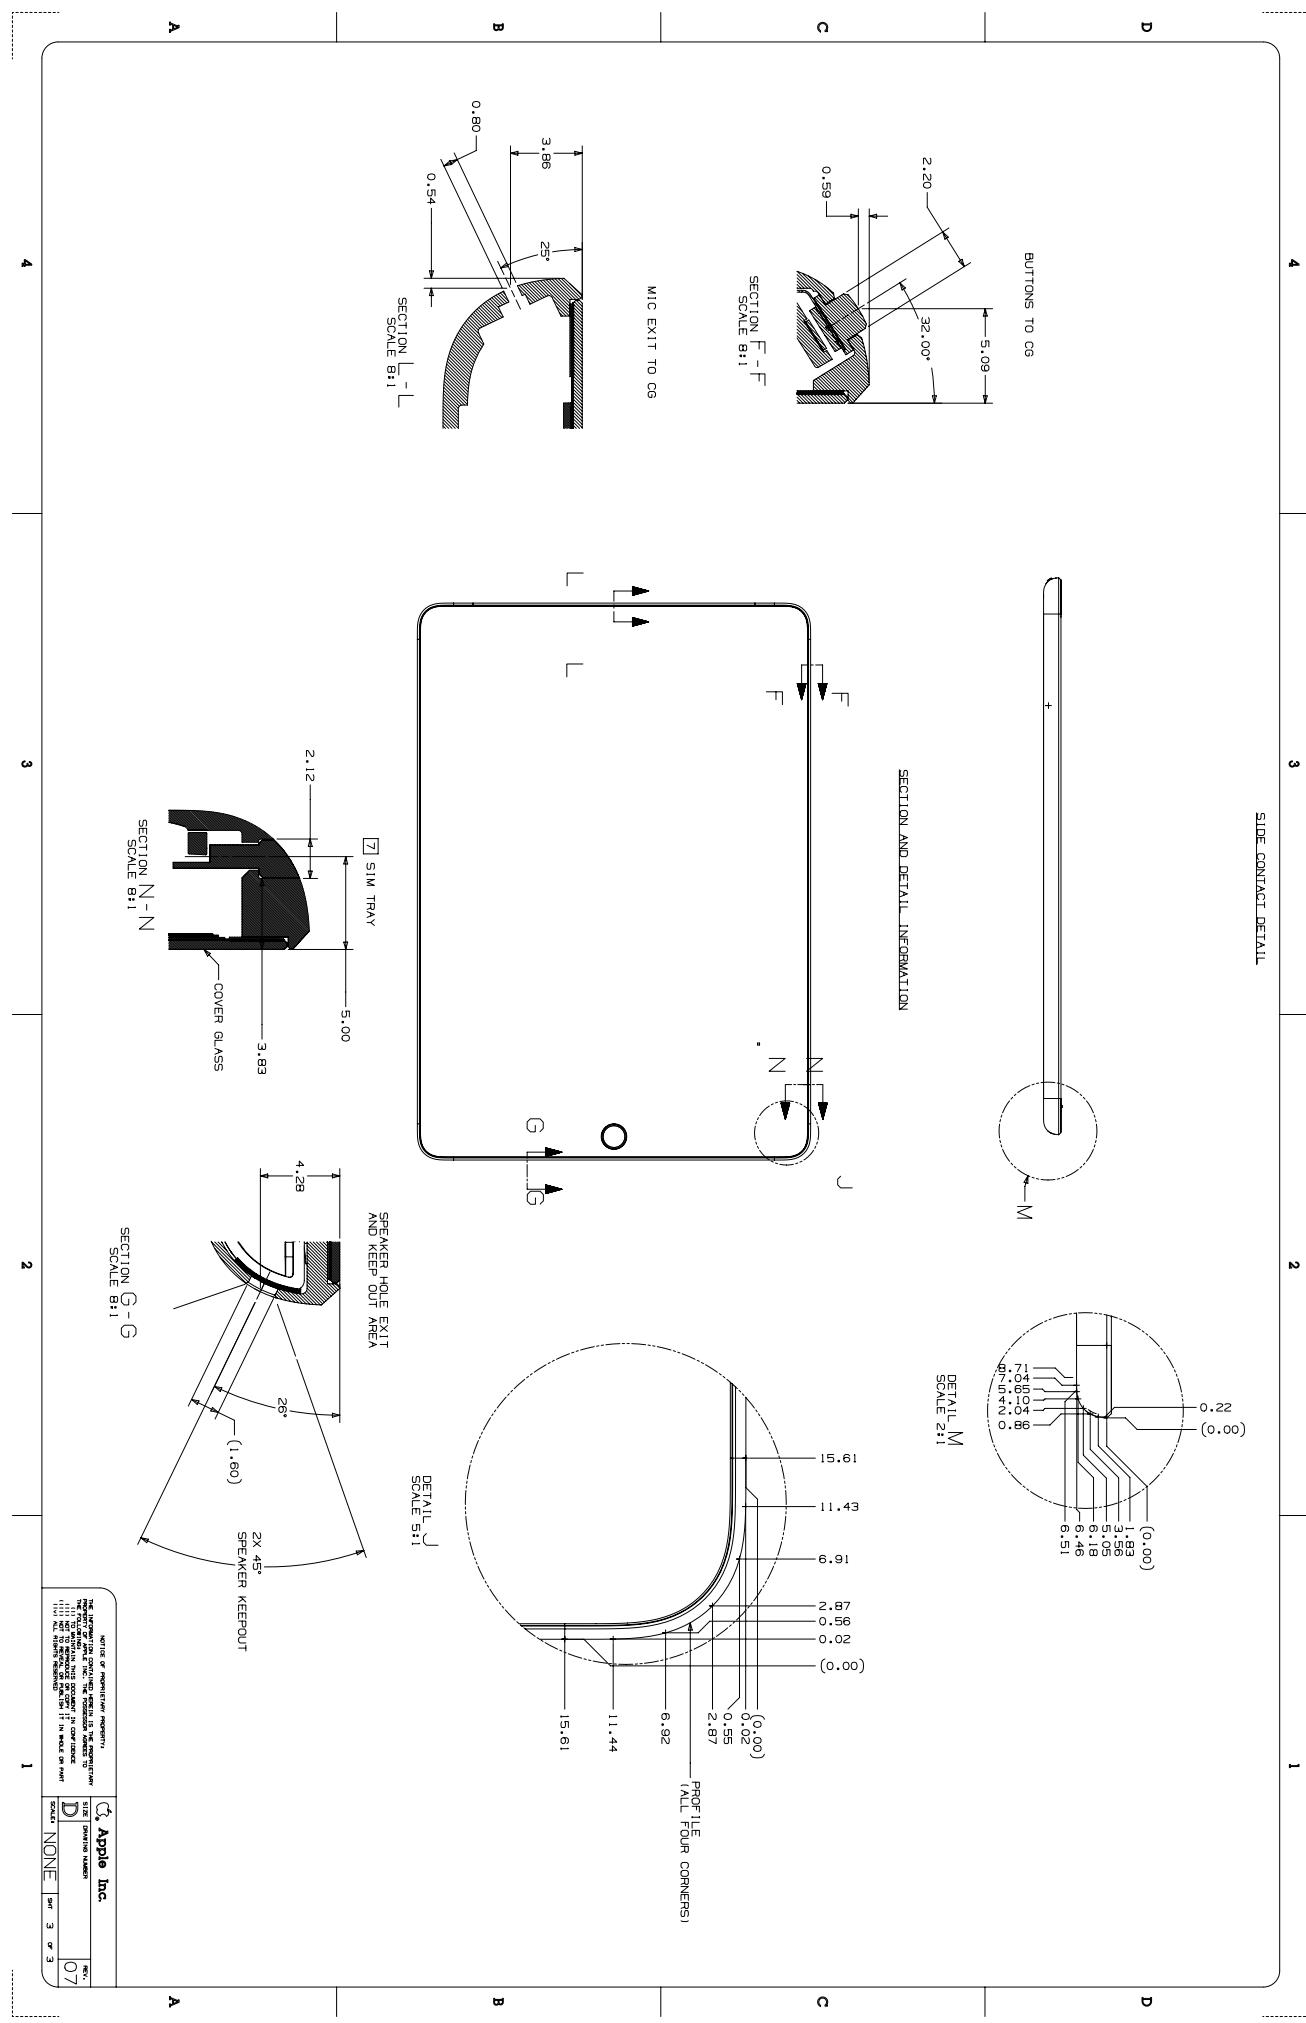


## 29.51 iPad Pro (9.7-inch) with Wi-Fi

## NOTES

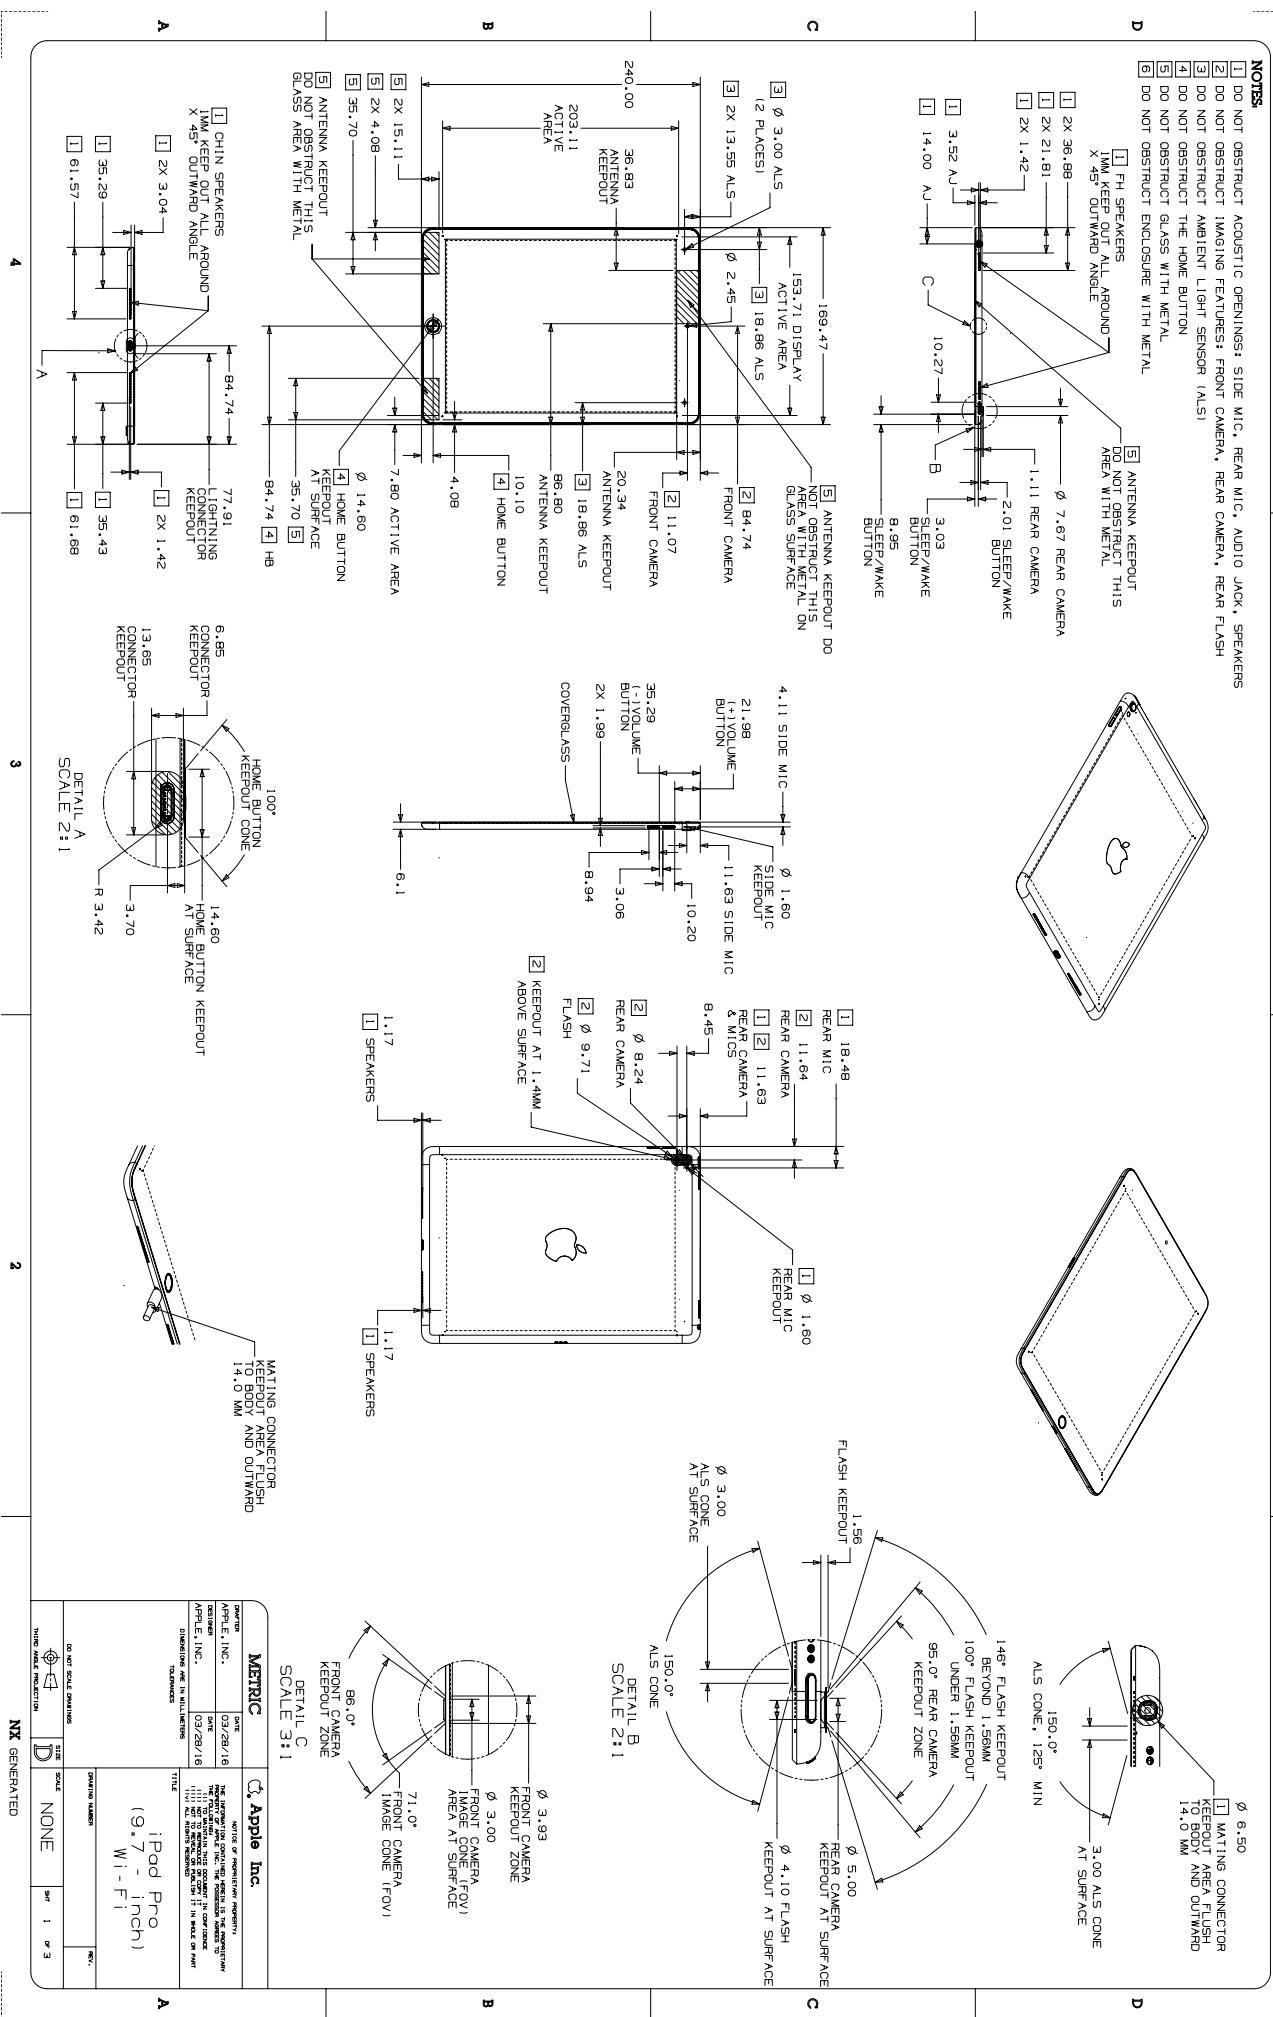

**29.52 iPad Pro (9.7-inch) with Wi-Fi + Cellular**

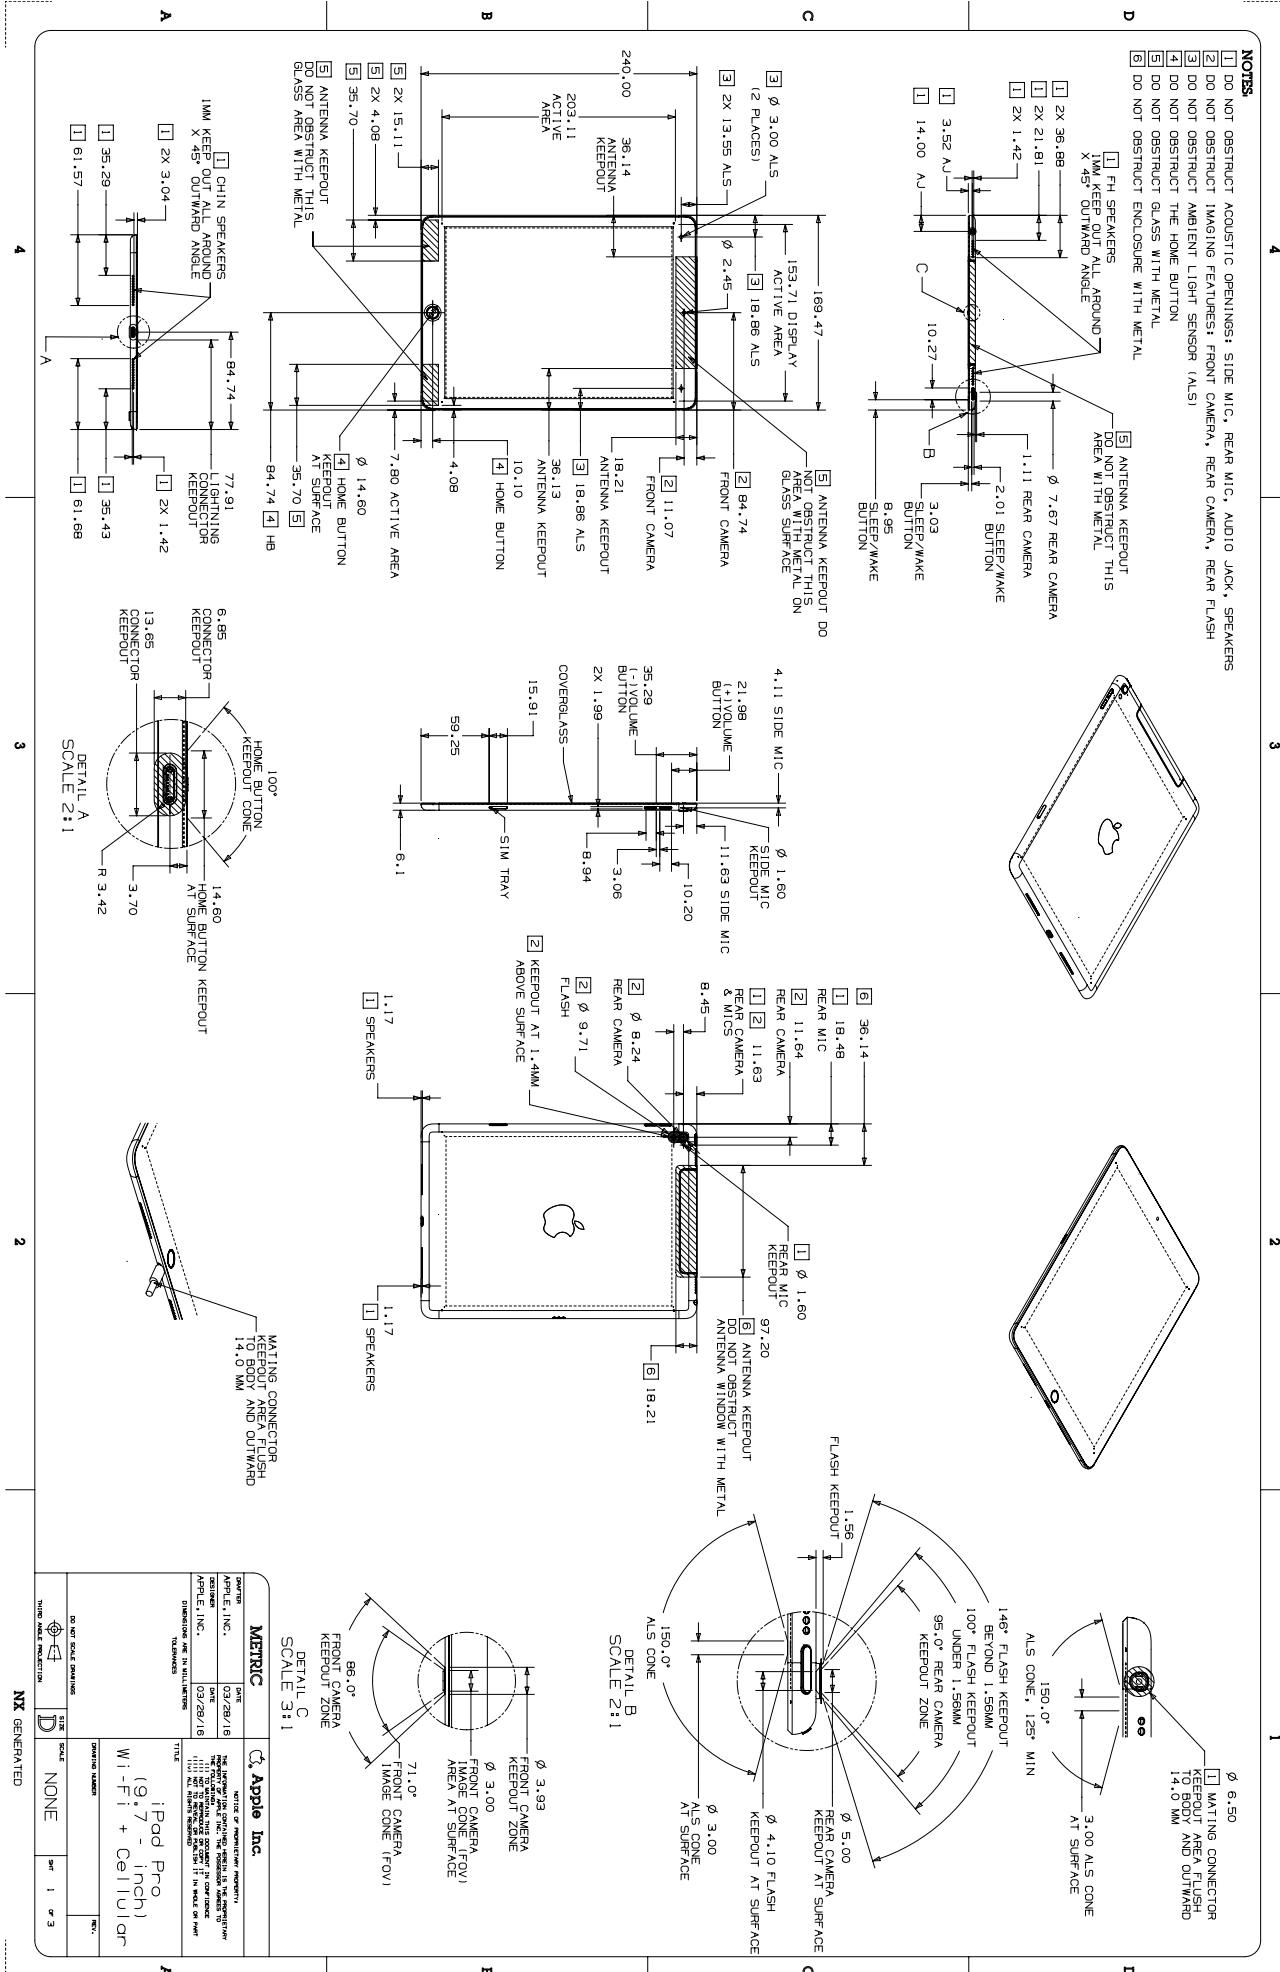

29.53 iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 1 of 2

DIMENSIONS TO CENTER OF PRODUCT  
"N" = NORTH

"S" = SOUTH (123.85)

100

1000

3


SECTION  
SCALE 4:1

(24,62) SPINE MAGNET REGION

Ω

4






# 29.54 iPad Pro (9.7-inch) Magnet/Hall Effect Sensors 2 of 2

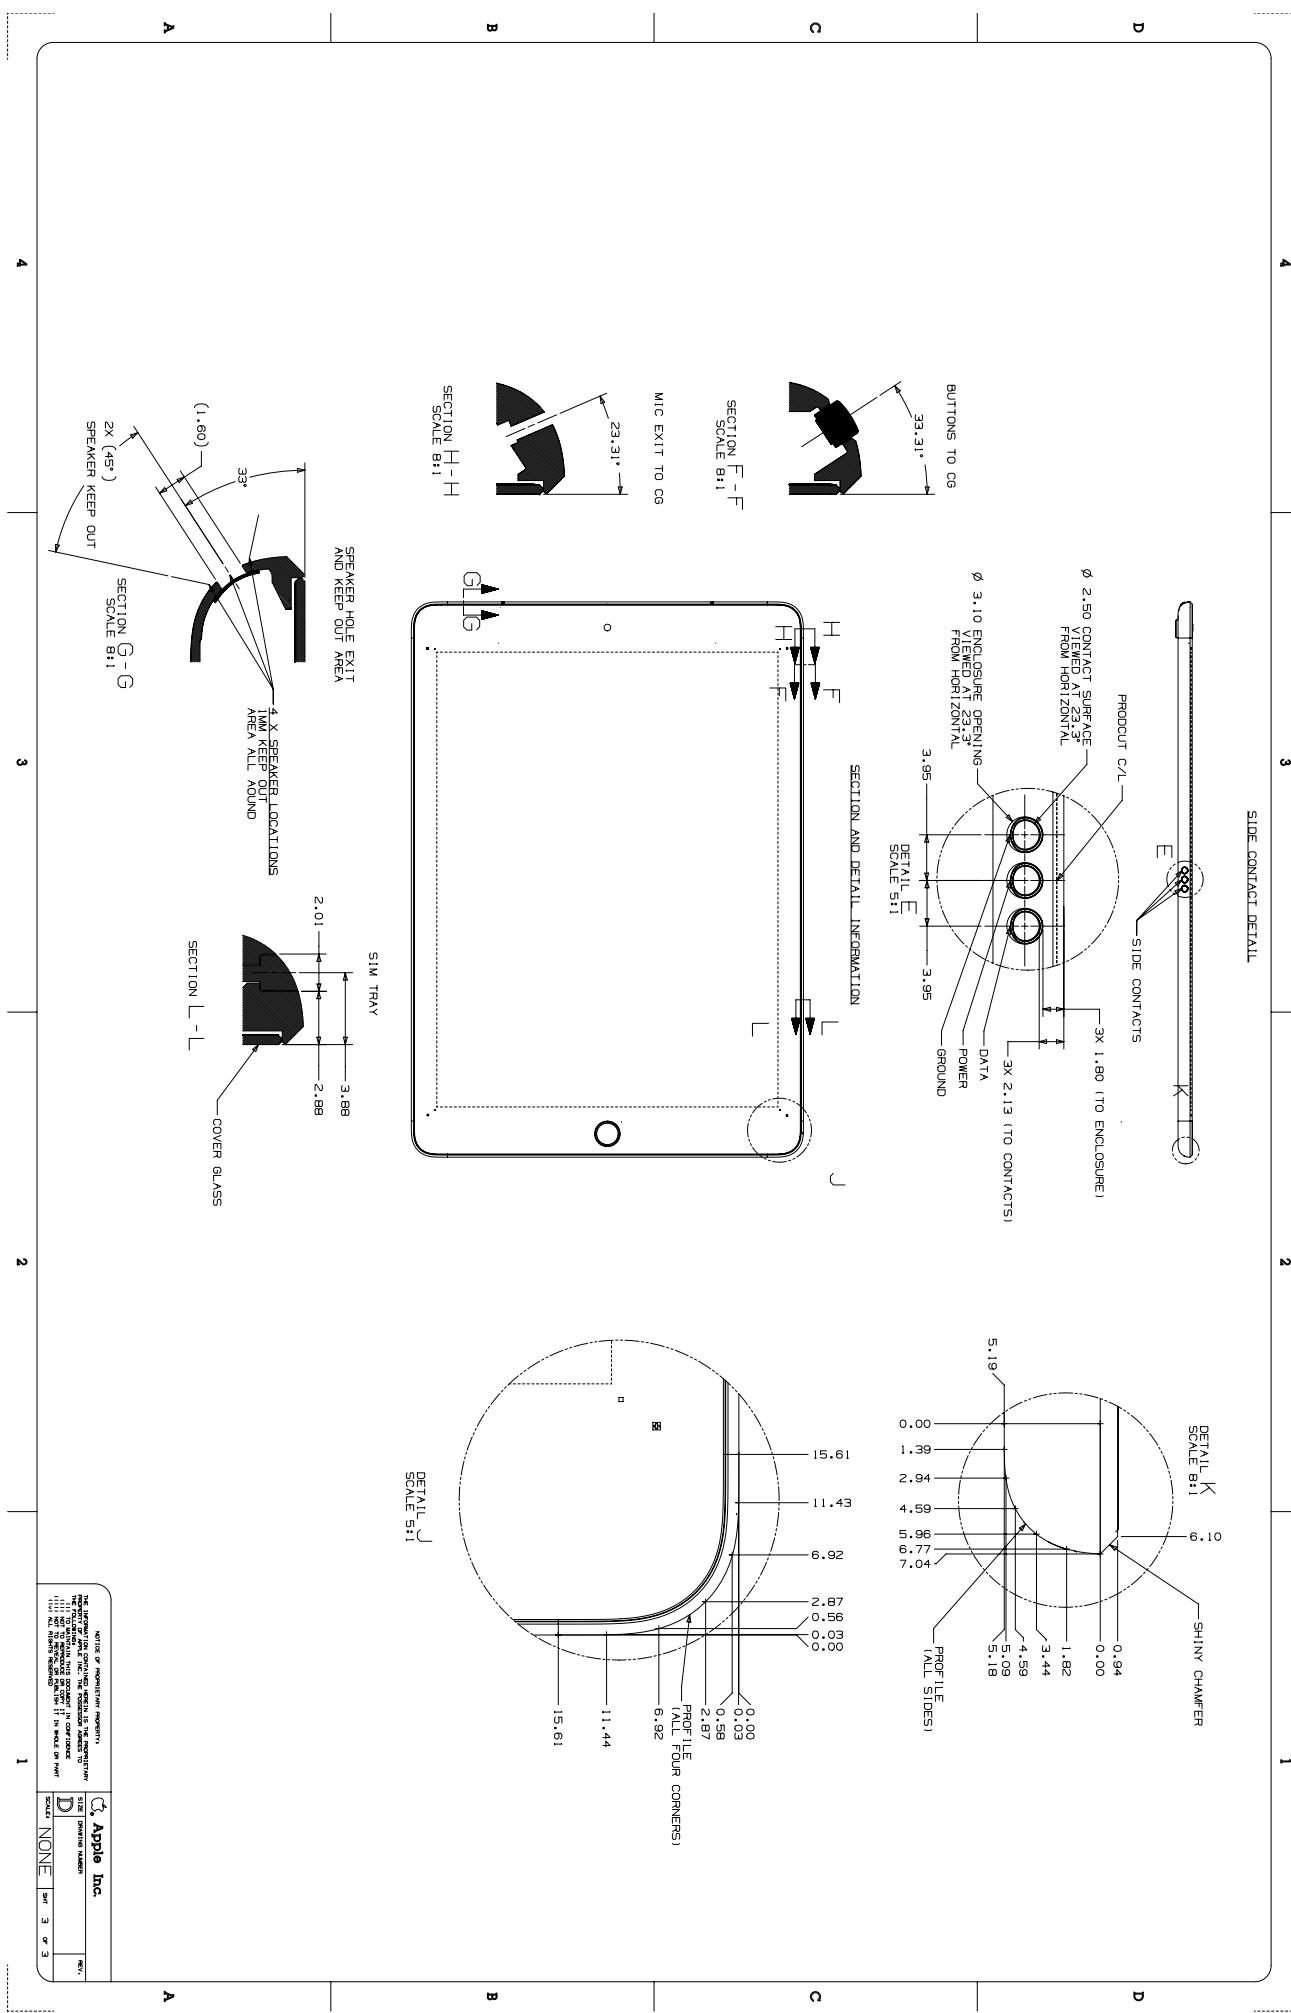

29.55 iPad Pro (12.9-inch) 1st Generation with Wi-Fi

## NOTES






- [1] DO NOT OBSTRUCT ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS  
 [2] DO NOT OBSTRUCT IMAGING FEATURES: FRONT CAMERA, REAR CAMERA  
 [3] DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS)  
 [4] DO NOT OBSTRUCT THE HOME BUTTON  
 [5] DO NOT OBSTRUCT GLASS WITH METAL

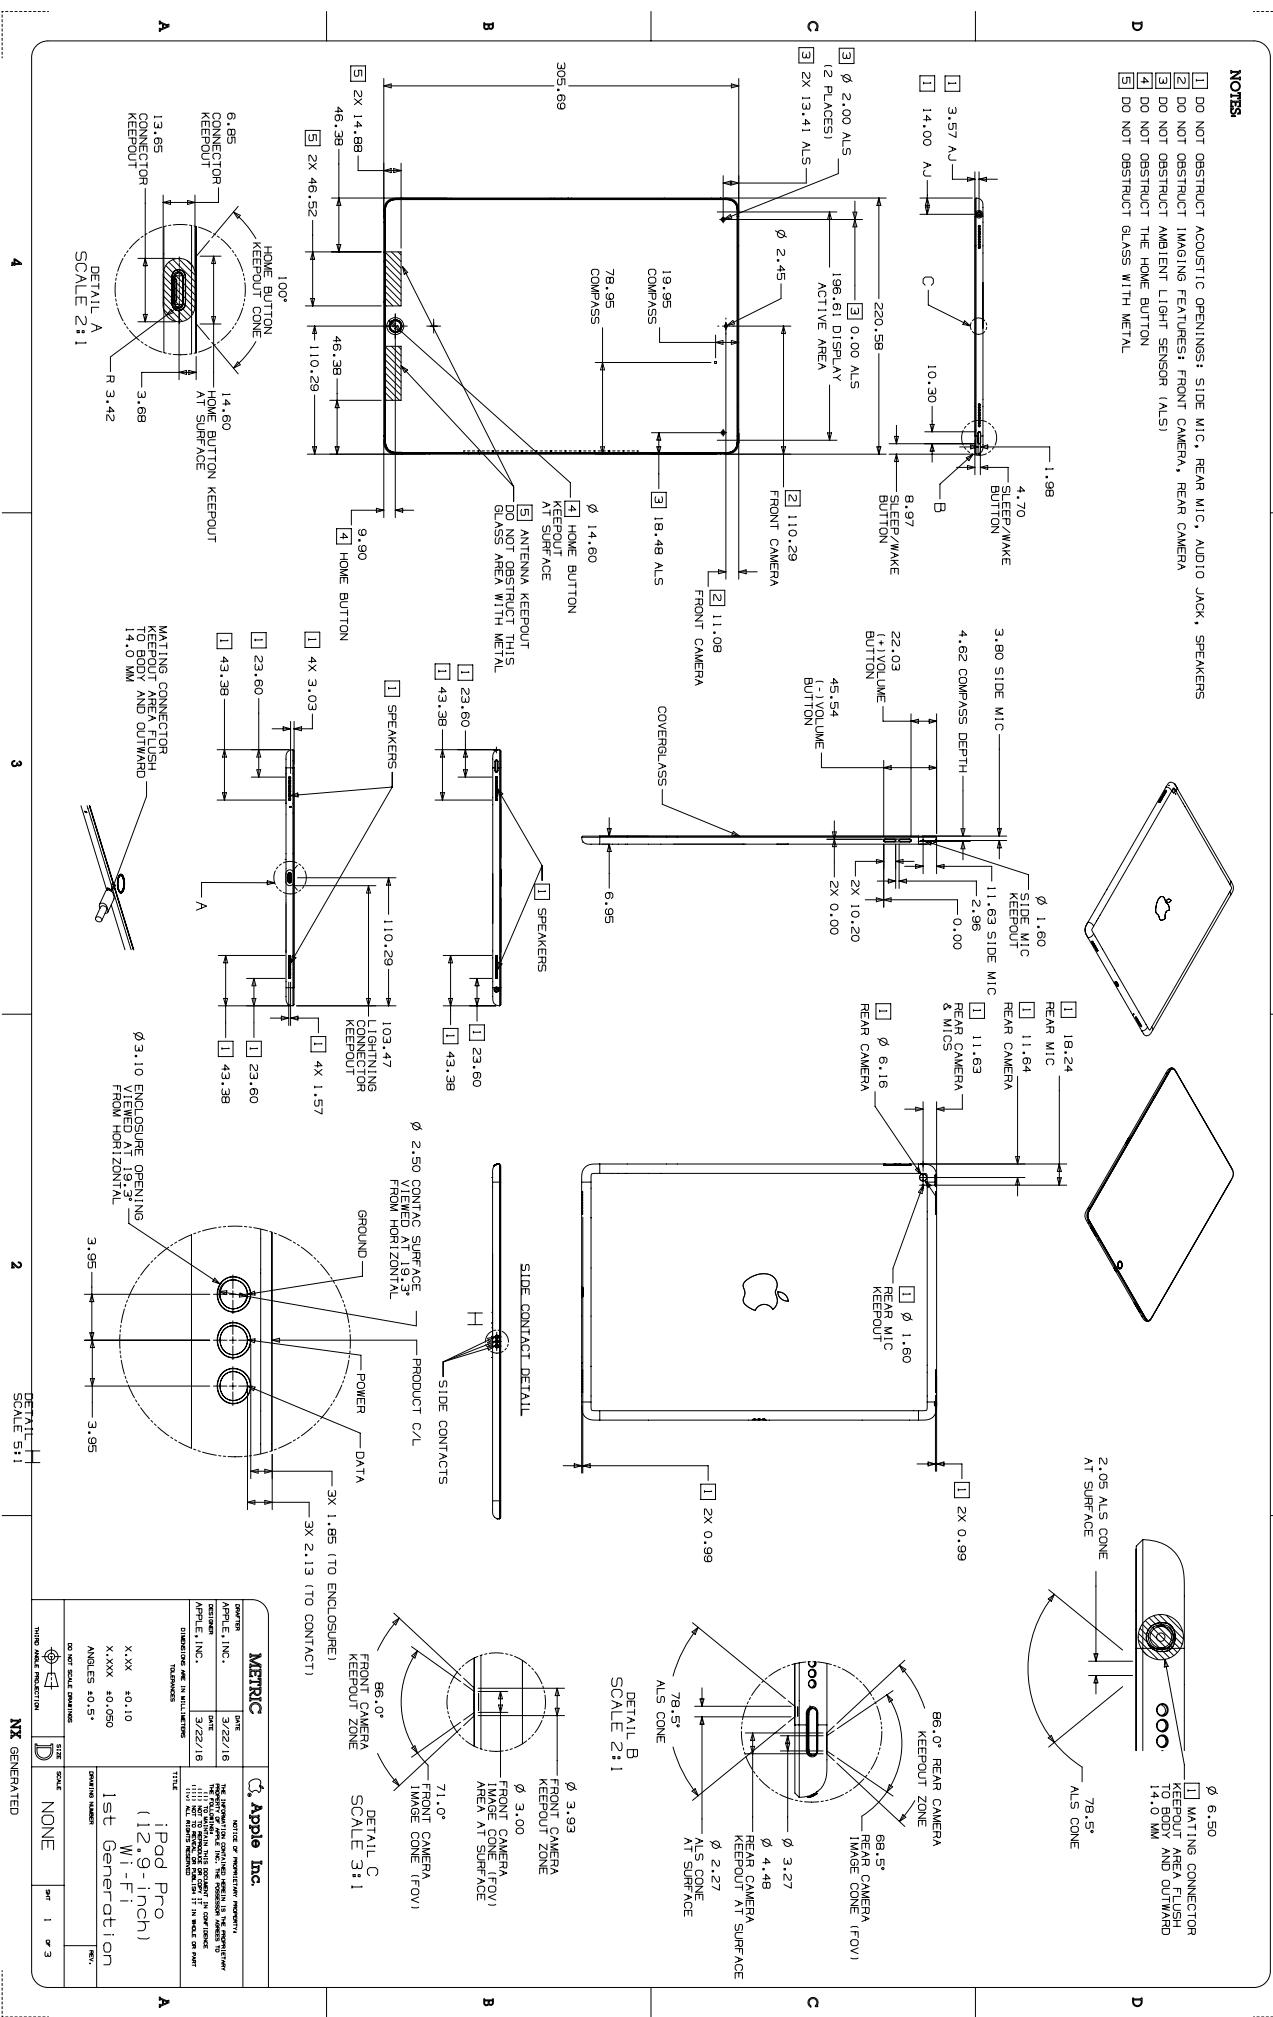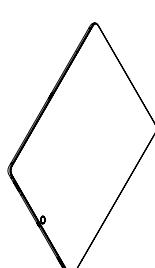


29.56 iPad Pro (12.9-inch) 1st Generation with Wi-Fi + Cellular

## NOTES:


- DO NOT OBSTRUCT ACOUSTIC OPENINGS, SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
  - DO NOT OBSTRUCT IMAGING FEATURES: FRONT CAMERA, REAR CAMERA
  - DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS)
  - DO NOT OBSTRUCT THE HOME BUTTON
  - DO NOT OBSTRUCT GLASS WITH METAL
  - DO NOT OBSTRUCT ENCLOSURE WITH METAL

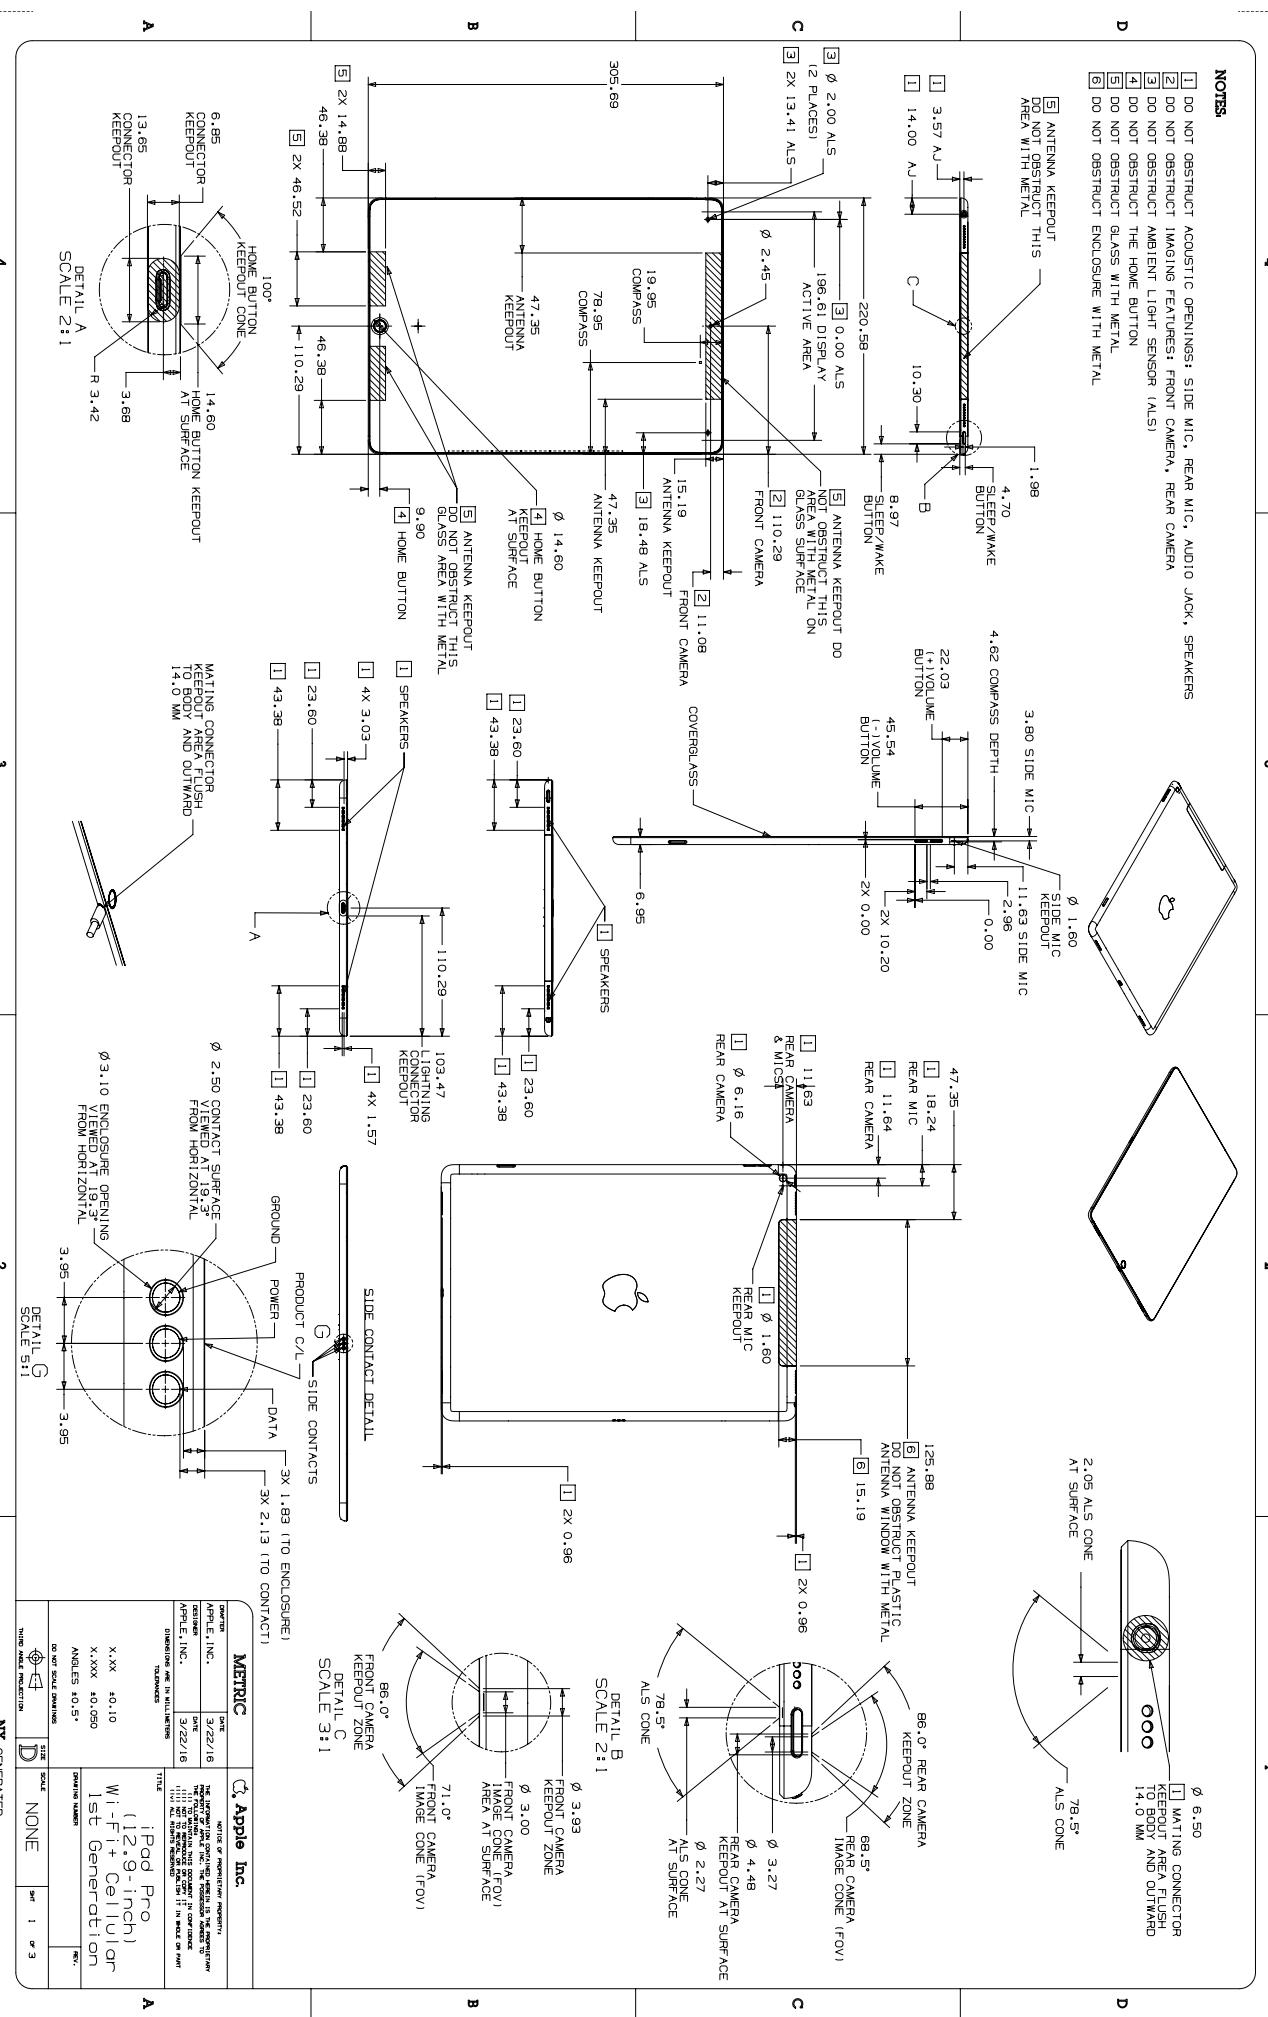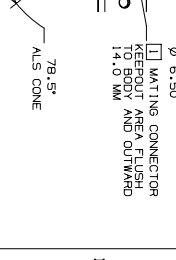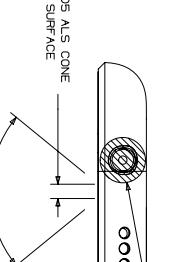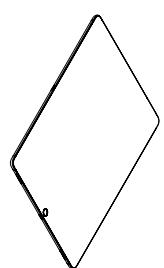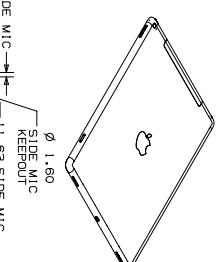

# 29.57 iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 1 of 2

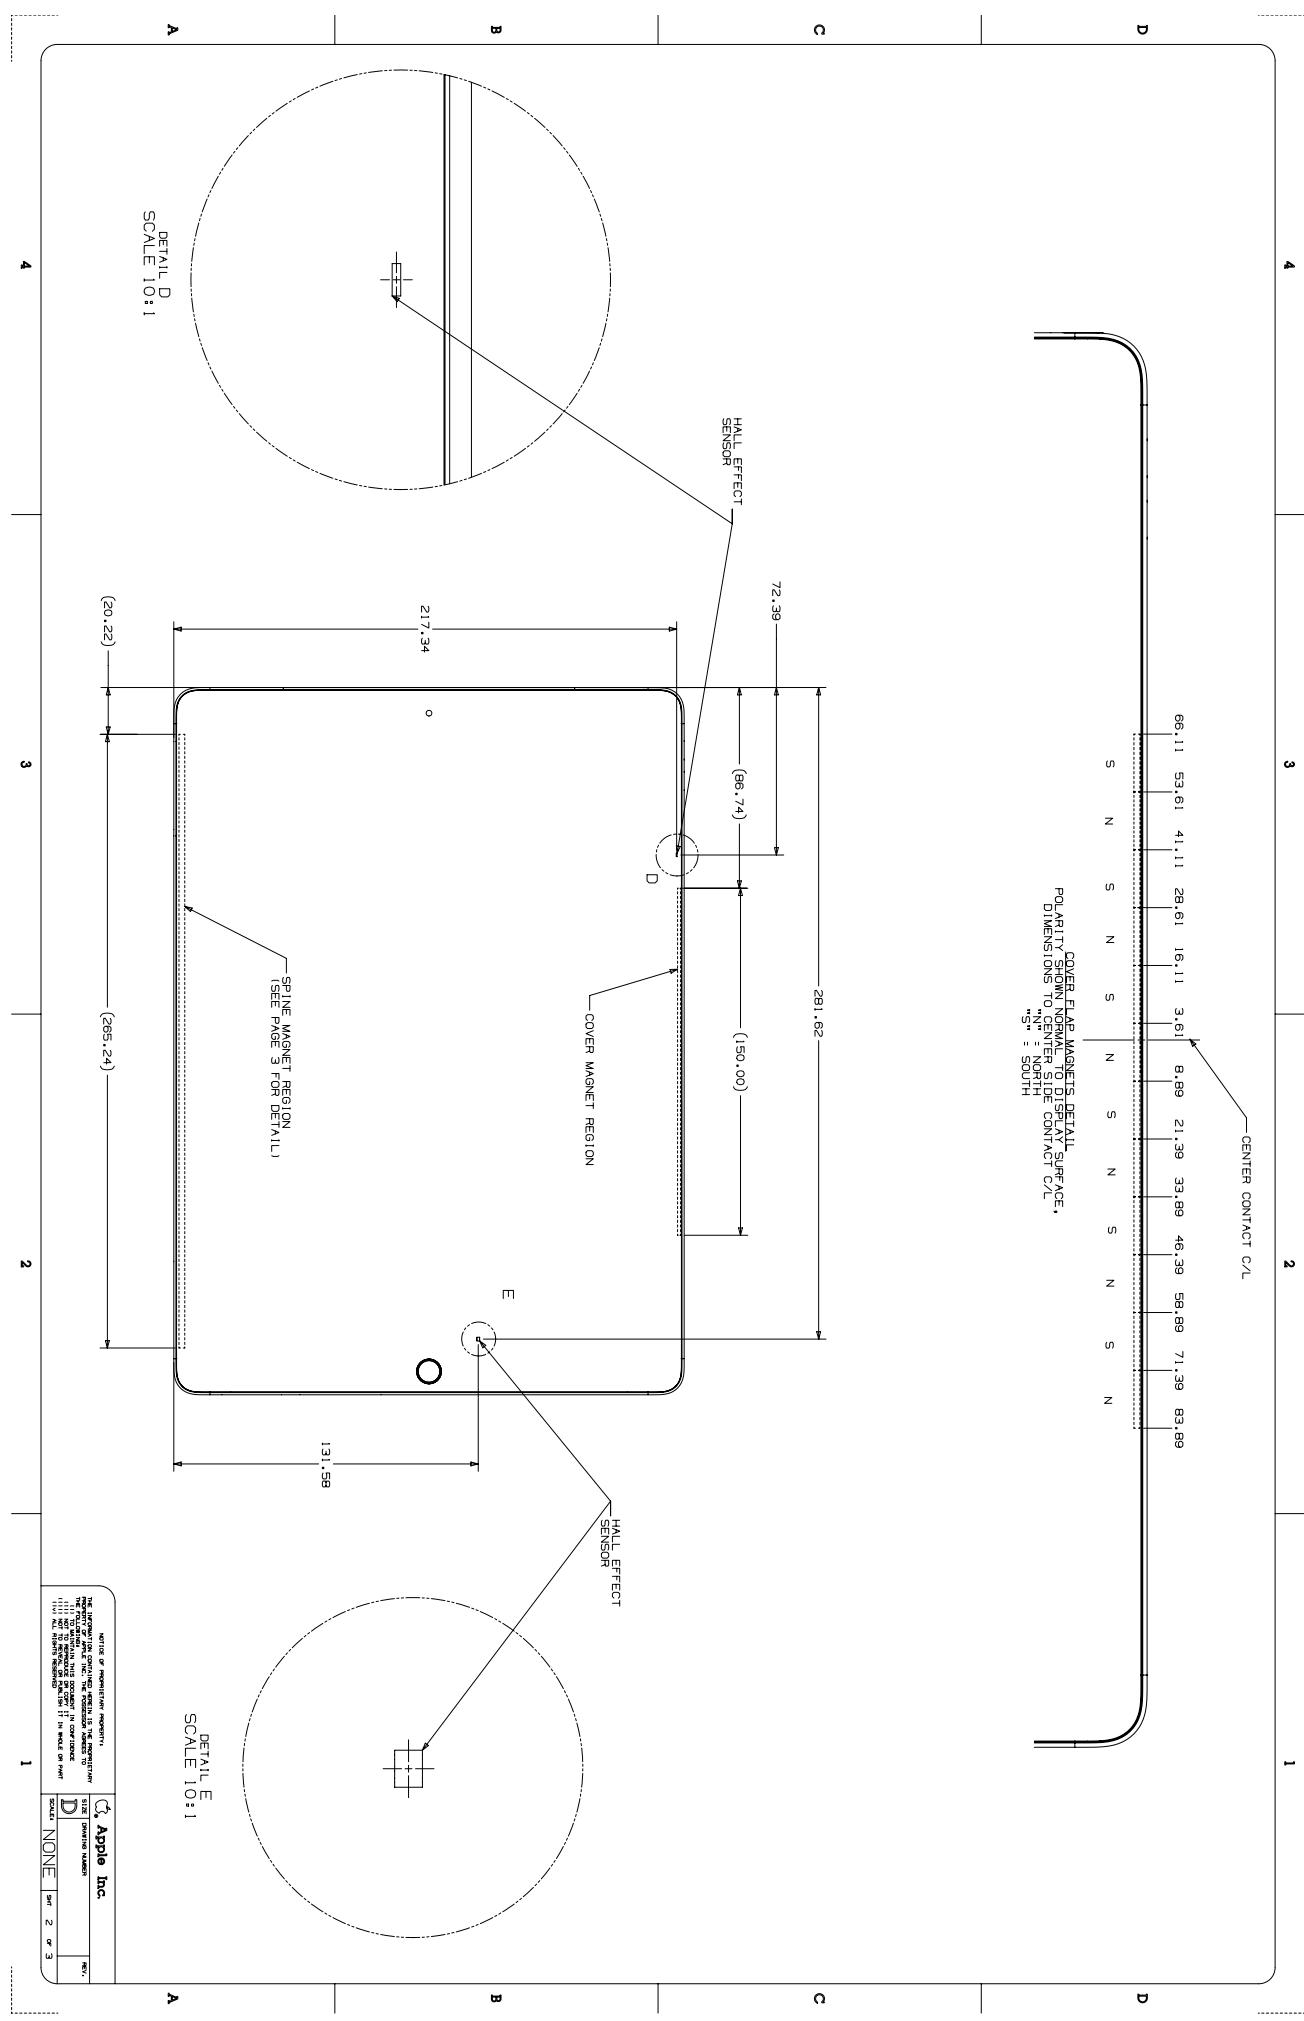

# 29.58 iPad Pro (12.9-inch) 1st Generation Magnet/Hall Effect Sensors 2 of 2

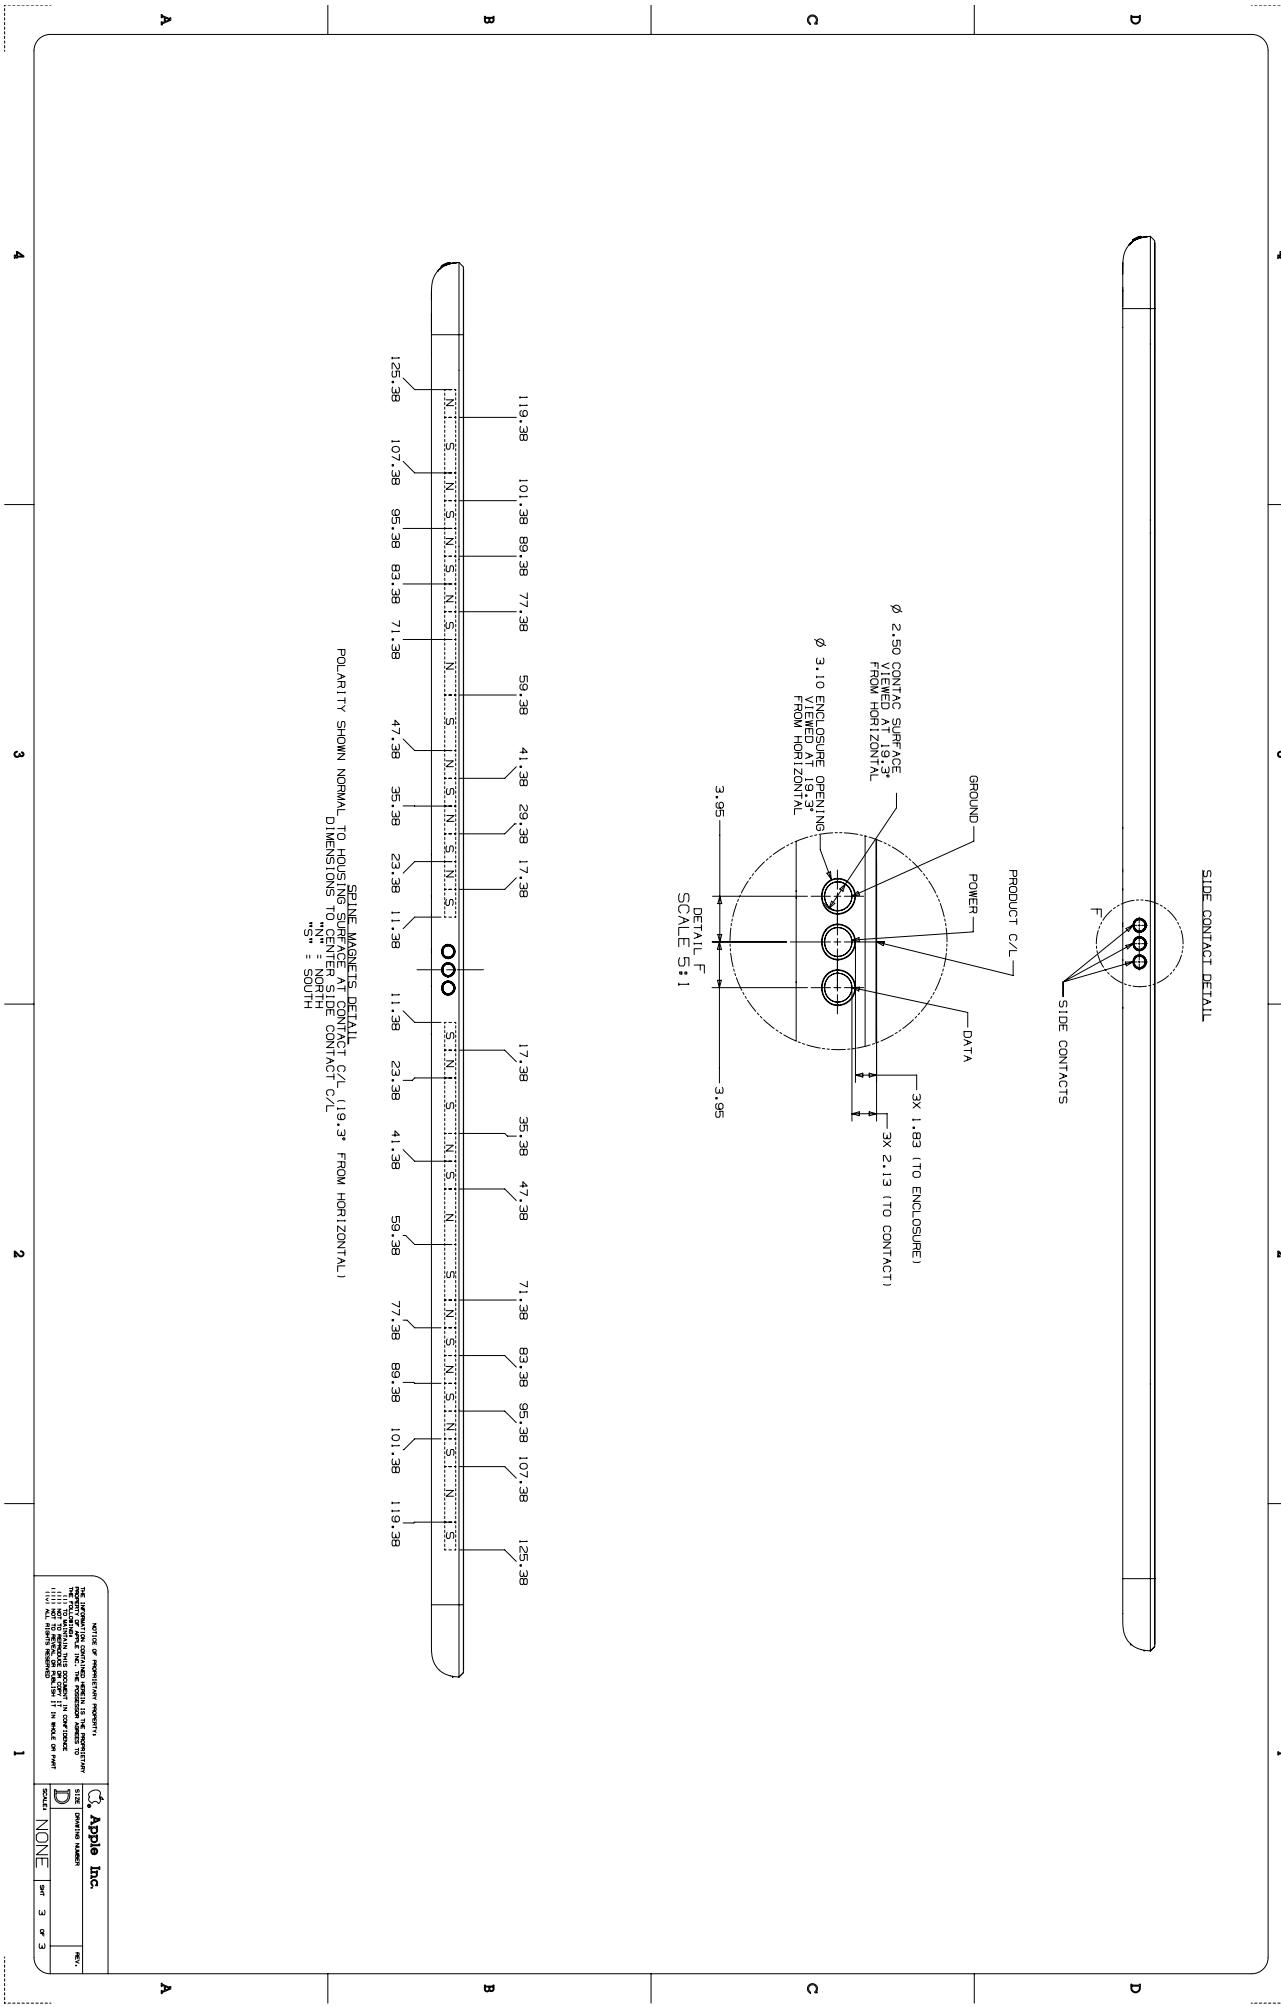

29.59 iPad mini 4 with Wi-Fi

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

- 1 ANTENNA KEEPOUT NO METAL CONTACT
- 2 DO NOT OBSTRUCT THE ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, SPEAKERS.
- 3 DO NOT OBSTRUCT THE IMAGING FEATURES: FRONT CAMERA, REAR CAMERA.
- 4 DO NOT OBSTRUCT THE ALS AMBIENT LIGHT SENSOR.
- 5 DO NOT OBSTRUCT THE HOME BUTTON.
- 6 DO NOT TOUCH GLASS.

**AUDIO JACK (AJ) & ALS**

**FRONT CAMERA (FC)**

**REAR CAMERA (RC)**


**HOME BUTTON (HB)**

**METRIC**

ITEM	Metric	Apple Inc.
Antenna, Inc.	DATE 09/15 REV 00/09/15	NOTICE OF RELEVANT PROPERTY The notices of relevant property contained in this document are not intended to be exhaustive or complete. They are intended to provide a general overview of the types of property that may be relevant to the use of the product. The notices do not purport to be a comprehensive list of all property that may be relevant to the use of the product. The notices are not intended to be a substitute for legal advice or professional advice. The notices are not intended to be a substitute for legal advice or professional advice.
Dimensions (inches)	INCHES	INCHES
Dimensions (millimeters)	MM	MM
ANGLES	X.XX	X.XX
ANGLES	40.5°	40.05°
THICKNESS	0.10	0.10
OPENING	1.60	1.60
PROJECTION	1.60	1.60
SIZE	10.60	10.60
SCALE	NONE	NONE







## 29.61 iPad mini 4 Magnet/Hall Effect Sensors

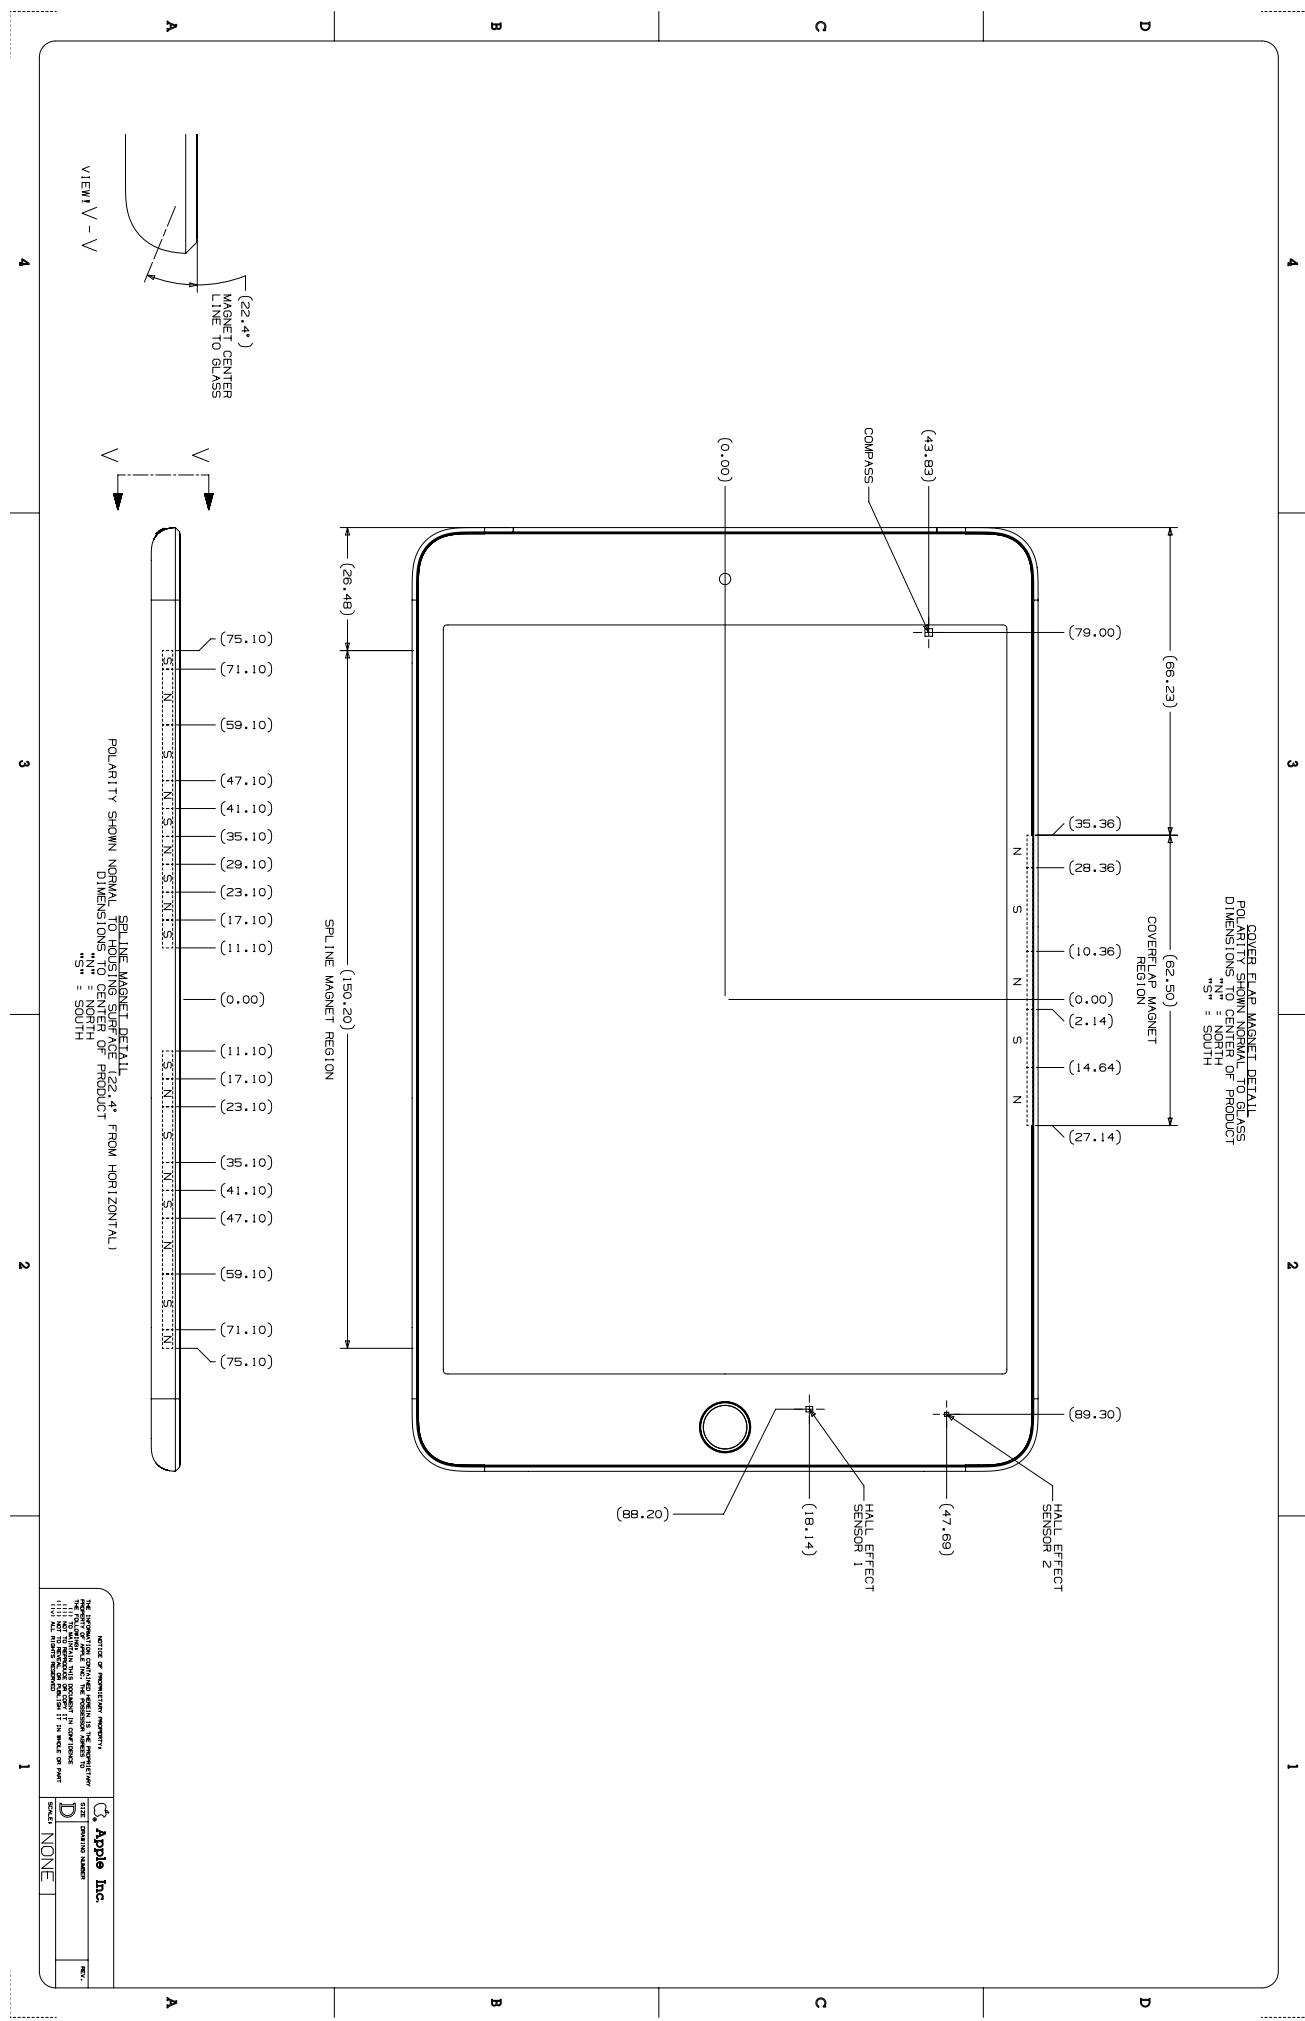

29.62 iPad Air 2 with Wi-Fi


## NOTES

- 1 DO NOT OBSTRUCT ACOUSTIC OPENINGS: SIDE MIC, REAR MIC, AUDIO JACK, SPEAKERS
  - 2 DO NOT OBSTRUCT IMAGING FEATURES: FRONT CAMERA, REAR CAMERA
  - 3 DO NOT OBSTRUCT AMBIENT LIGHT SENSOR (ALS)
  - 4 DO NOT OBSTRUCT THE HOME BUTTON
  - 5 DO NOT OBSTRUCT GLASS WITH METAL
  - 6 DO NOT OBSTRUCT ENCLOSURE WITH METAL

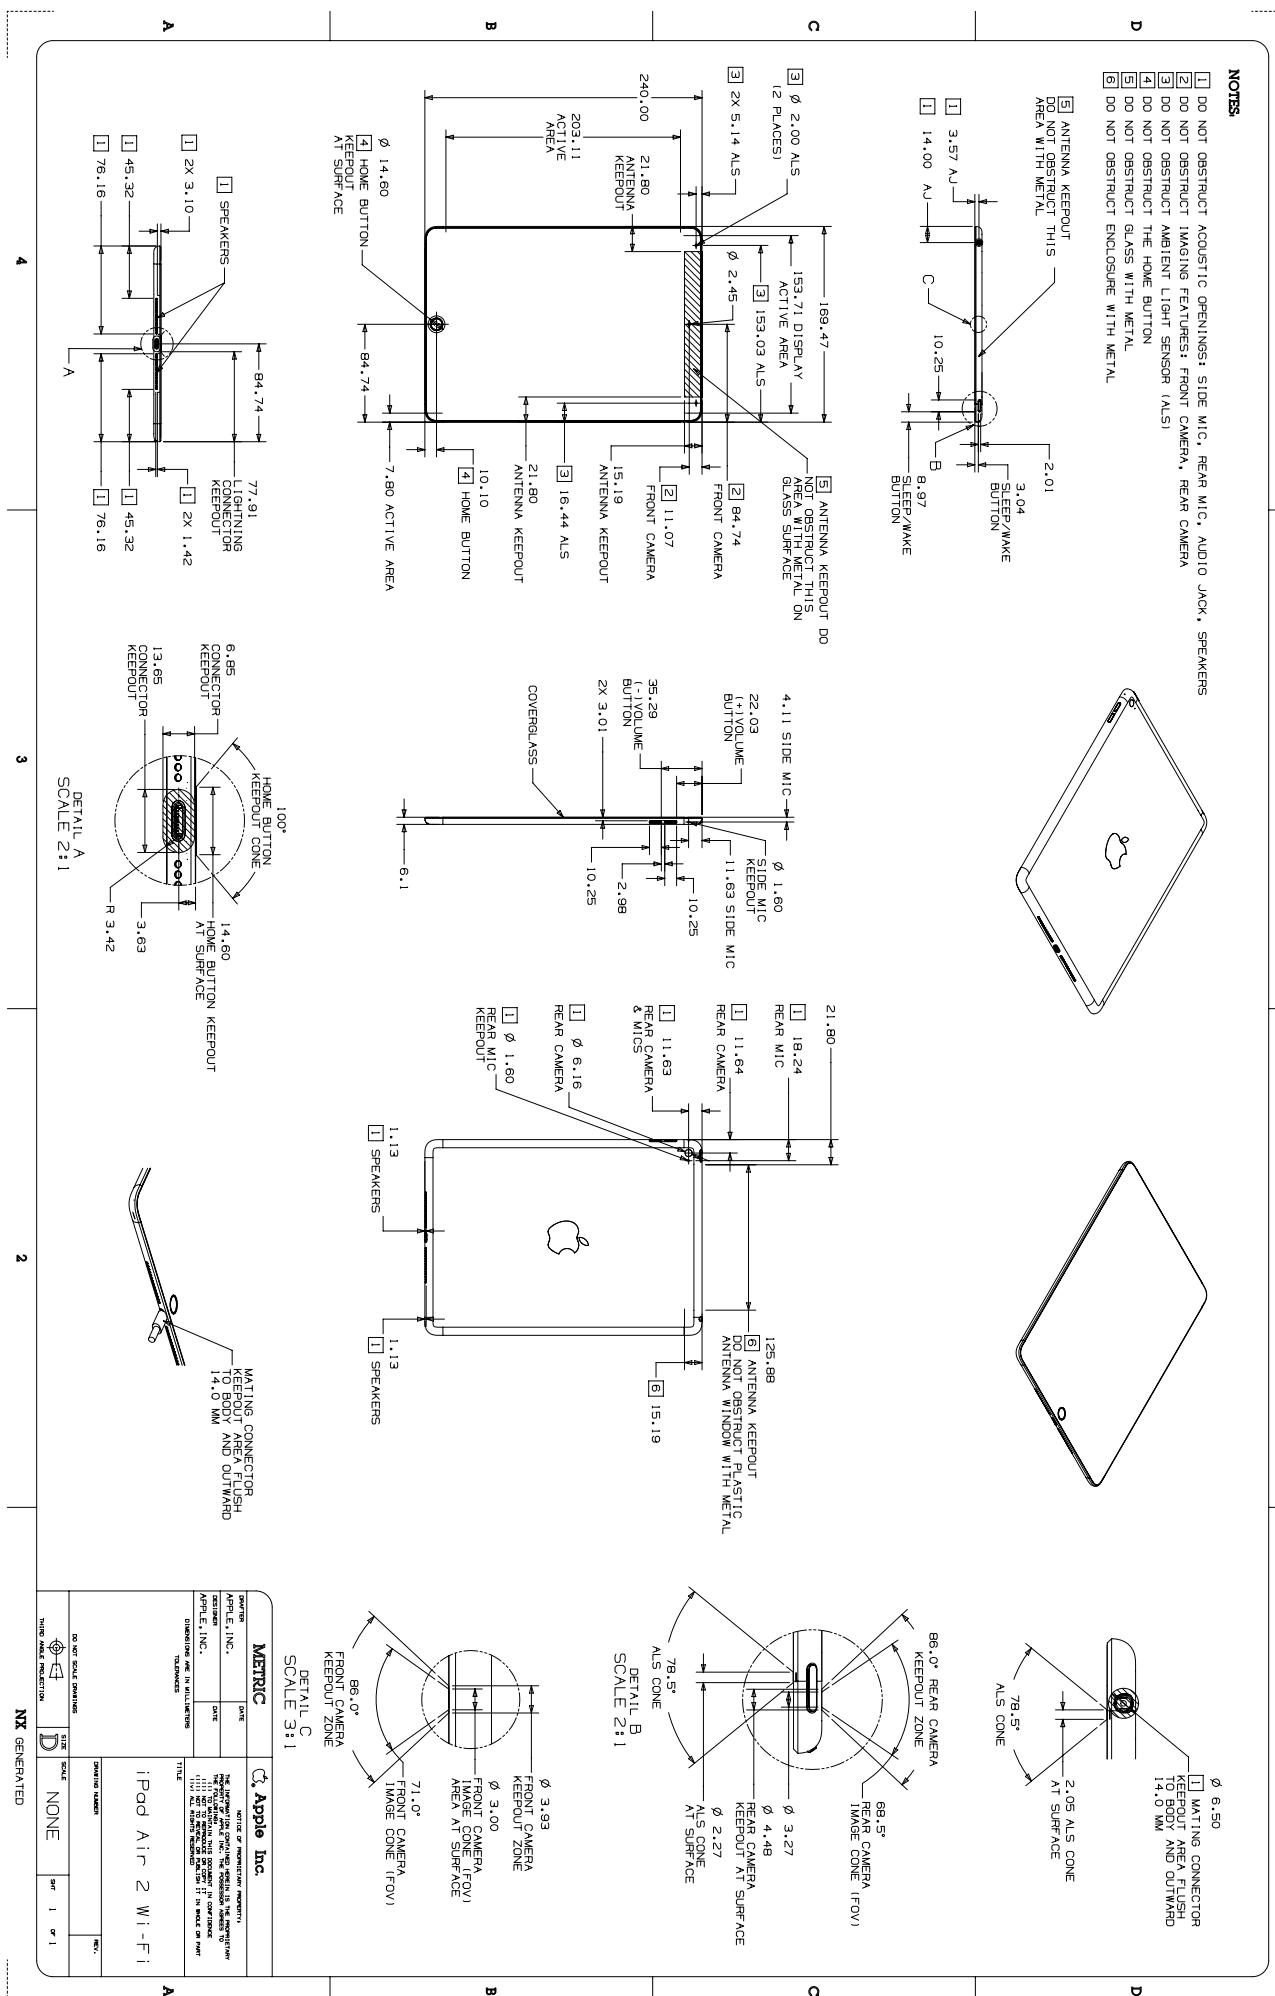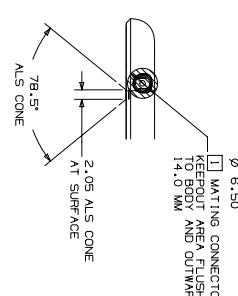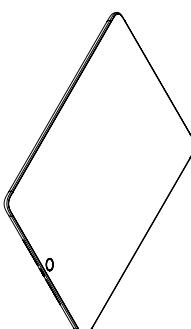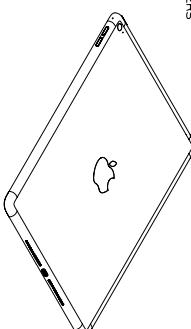





29.64 iPad mini 2 & iPad mini 3 with Wi-Fi

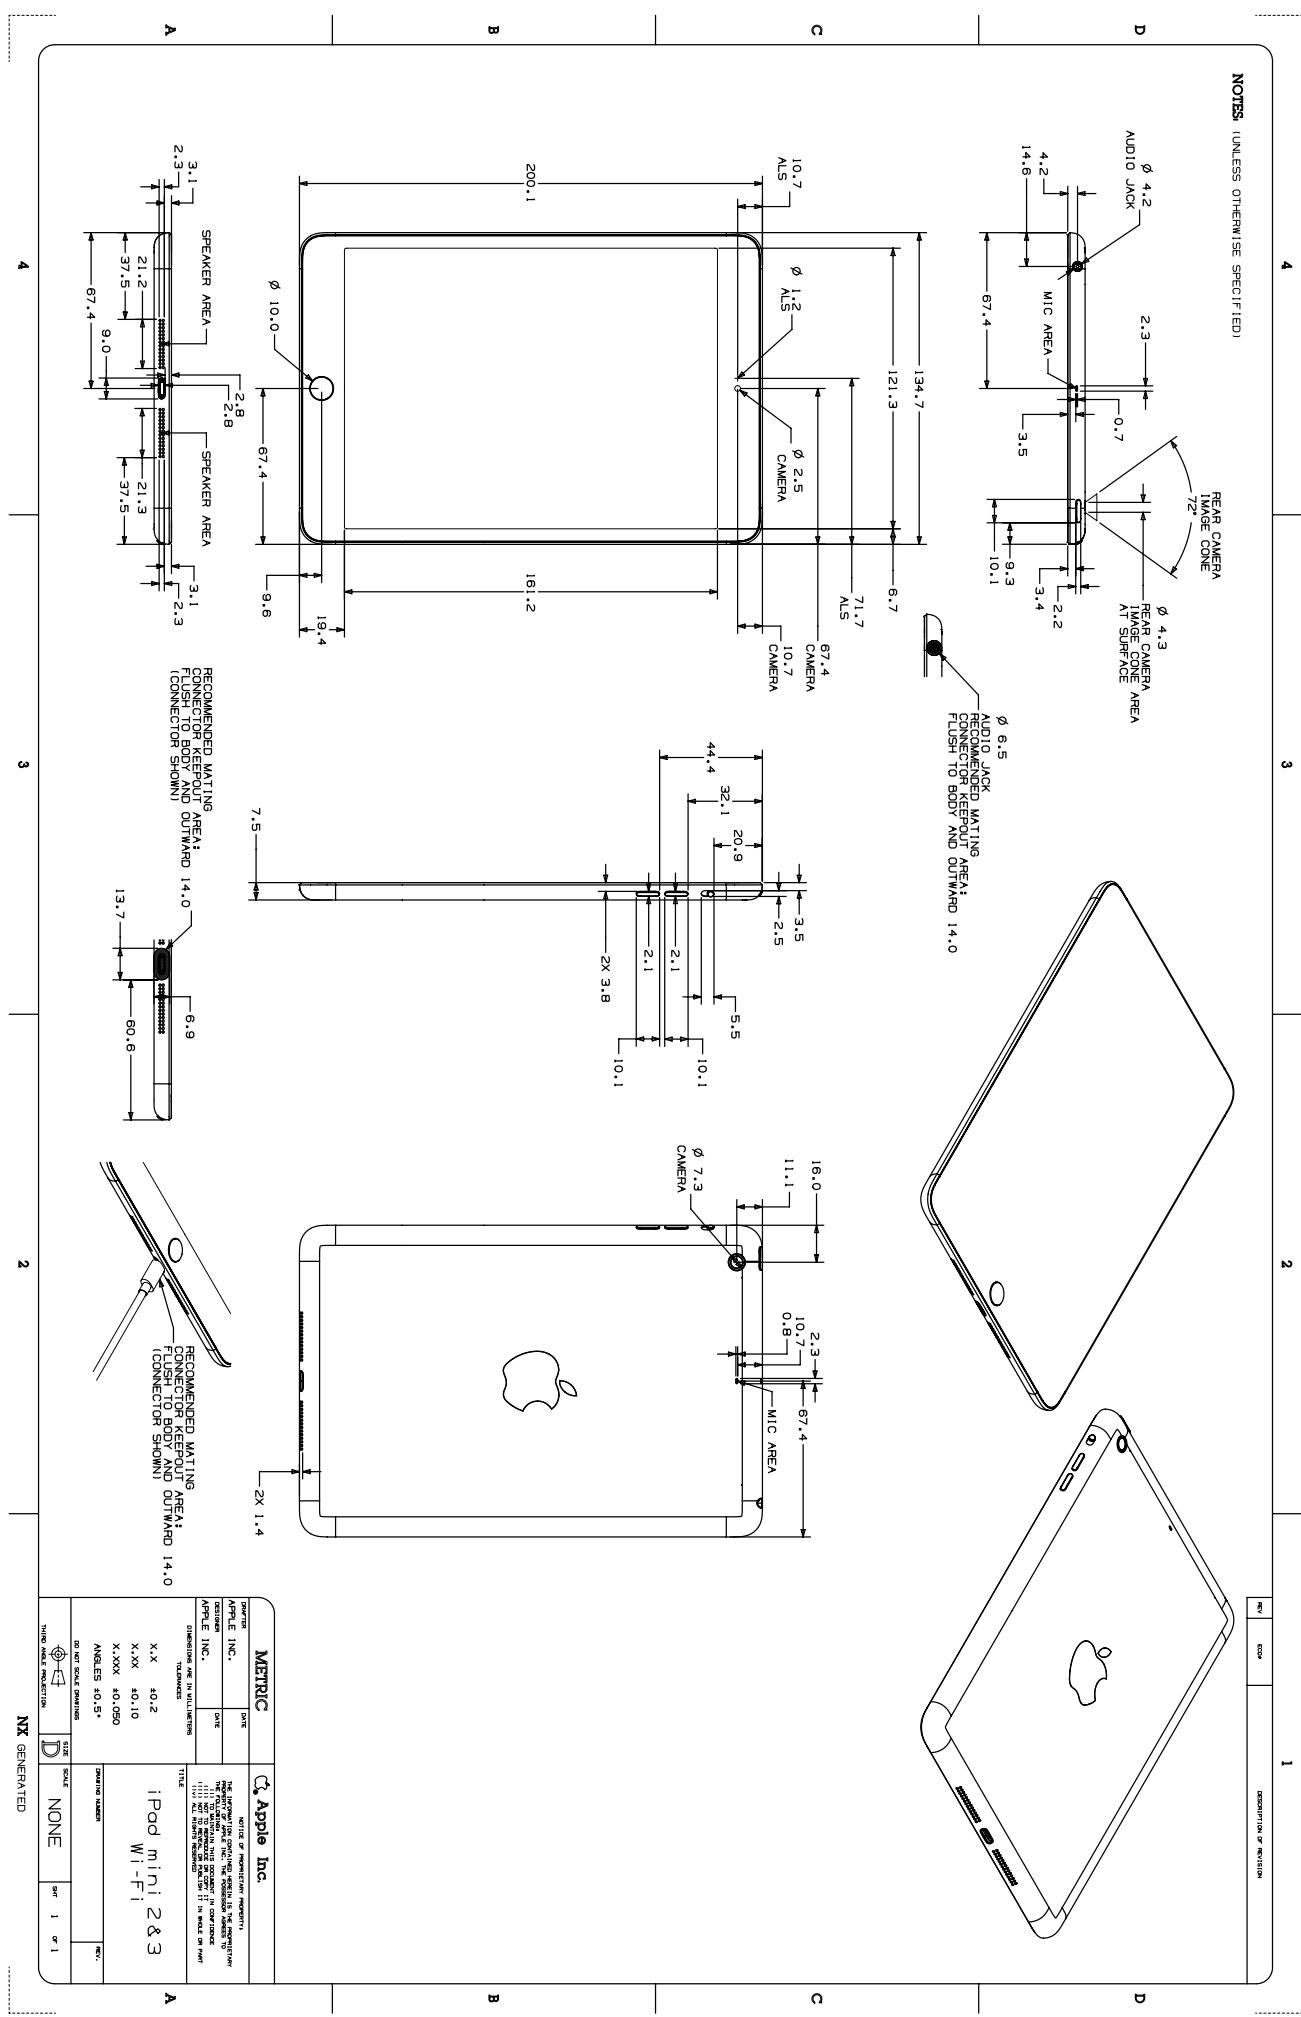


29.65 iPad mini 2 & iPad mini 3 with Wi-Fi + Cellular

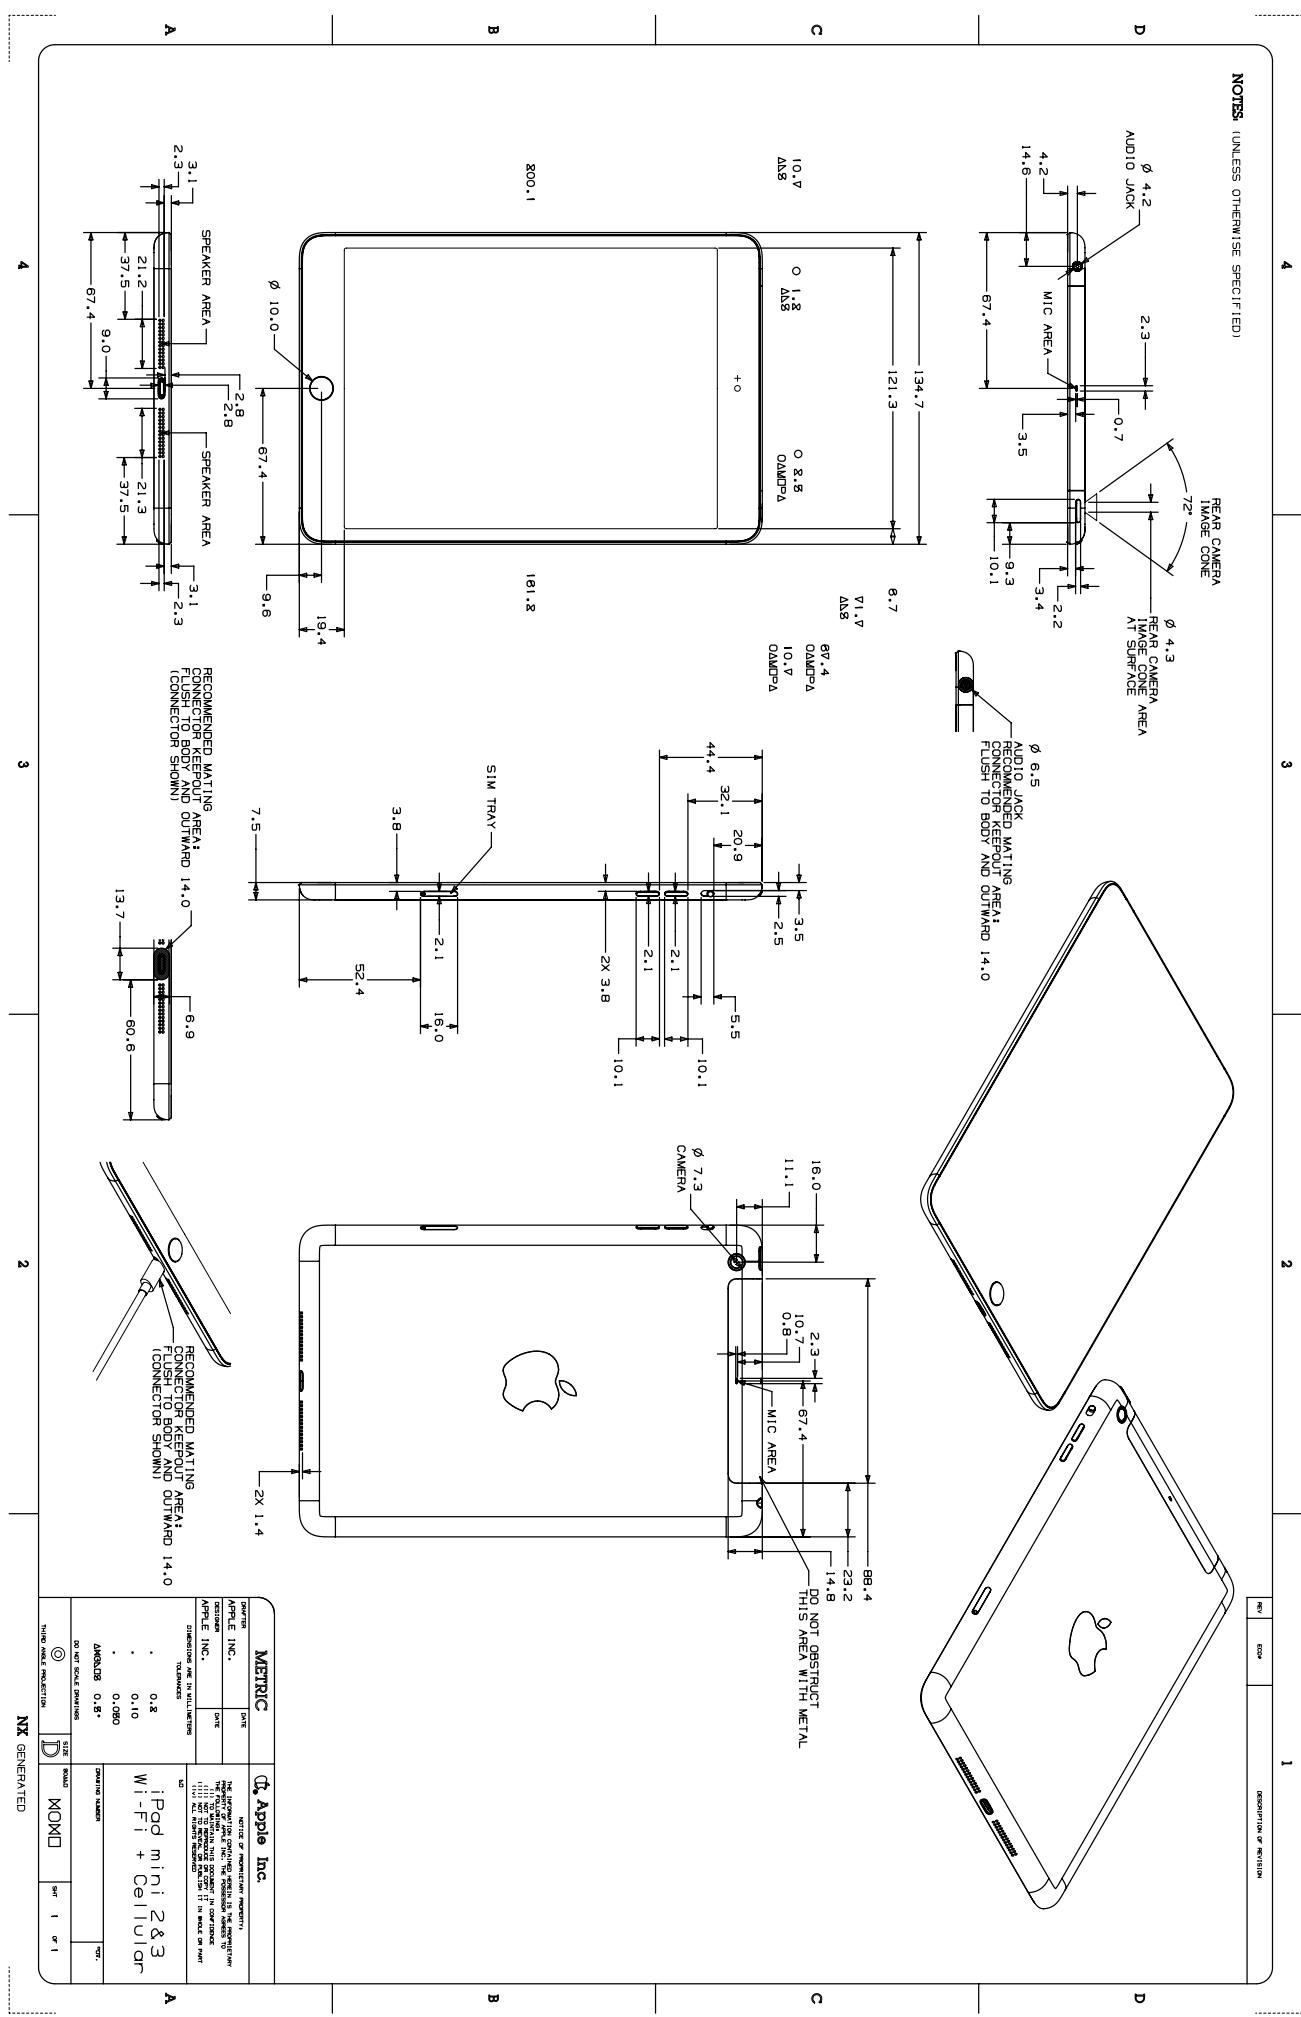

29.66 iPad Air with Wi-Fi

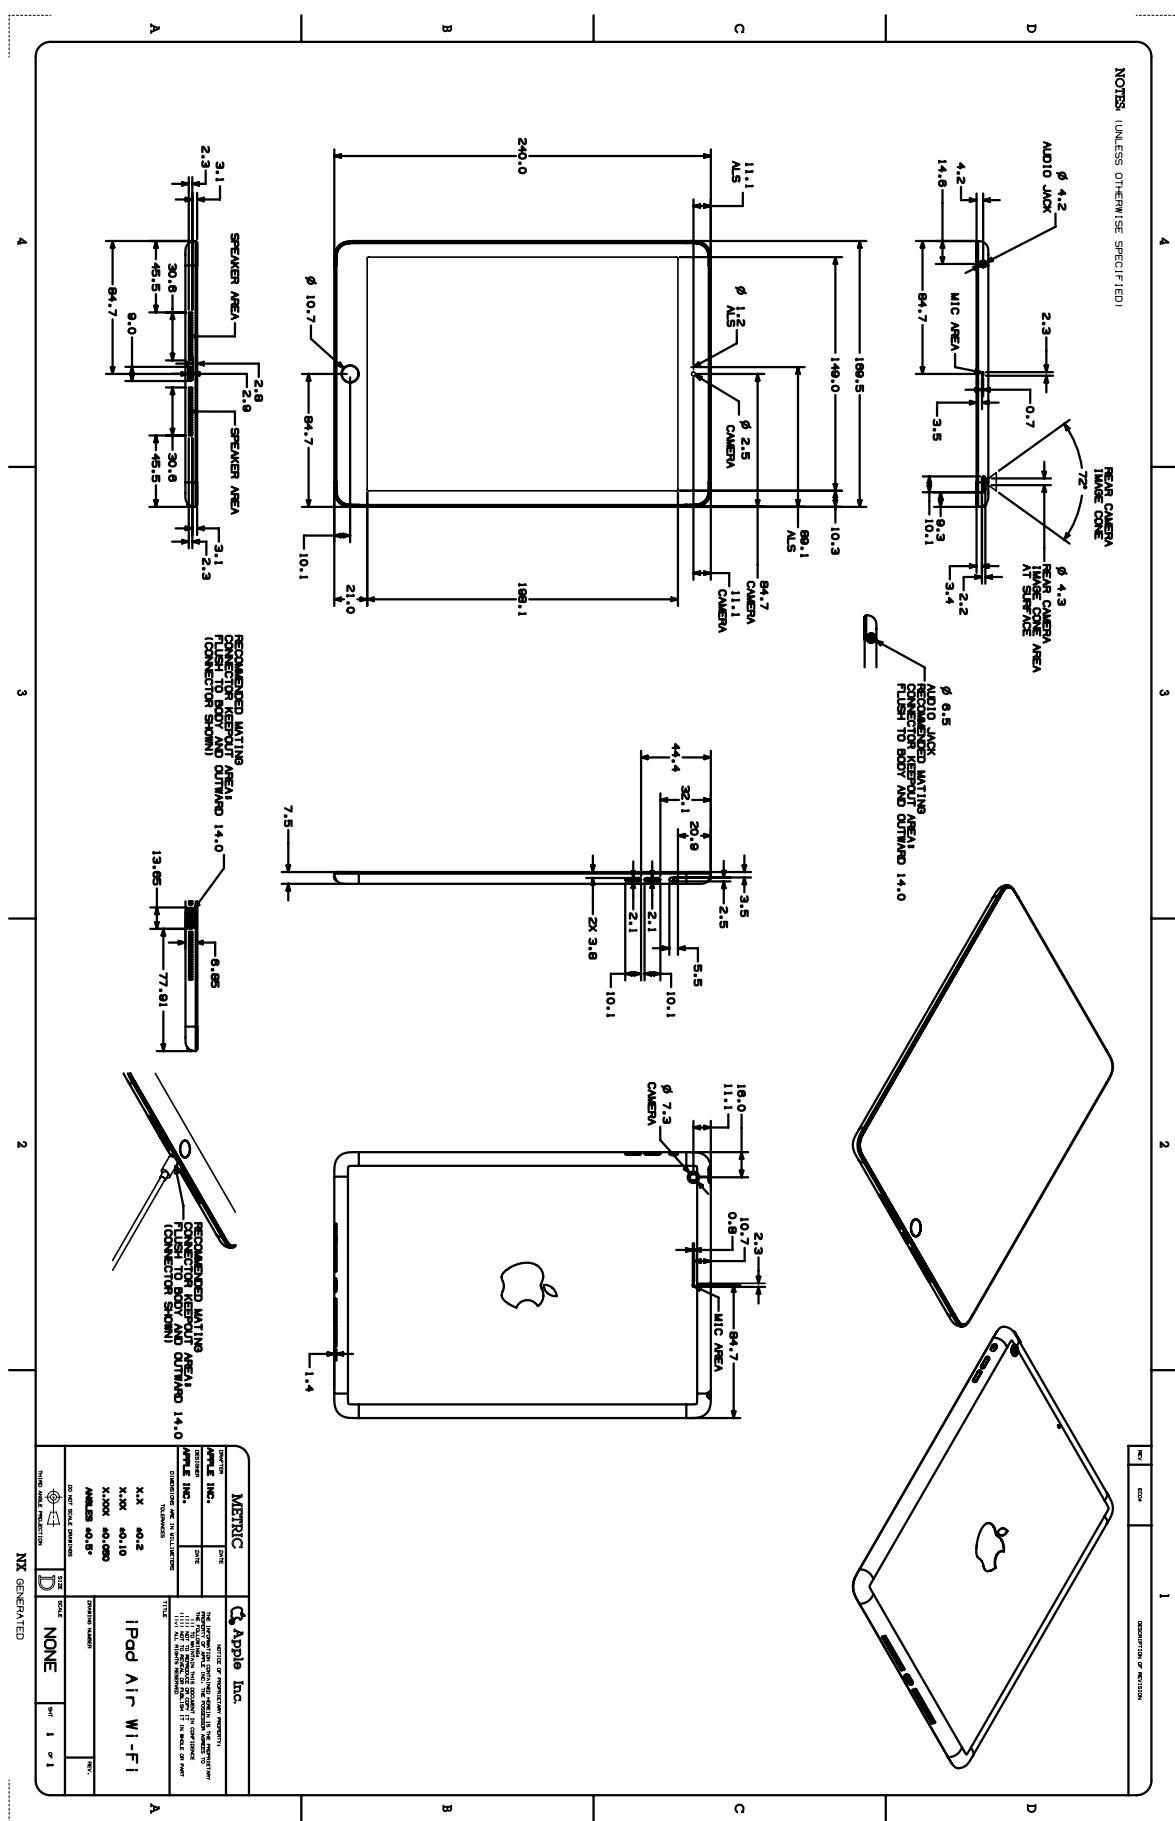

# 29.67 iPad Air with Wi-Fi + Cellular

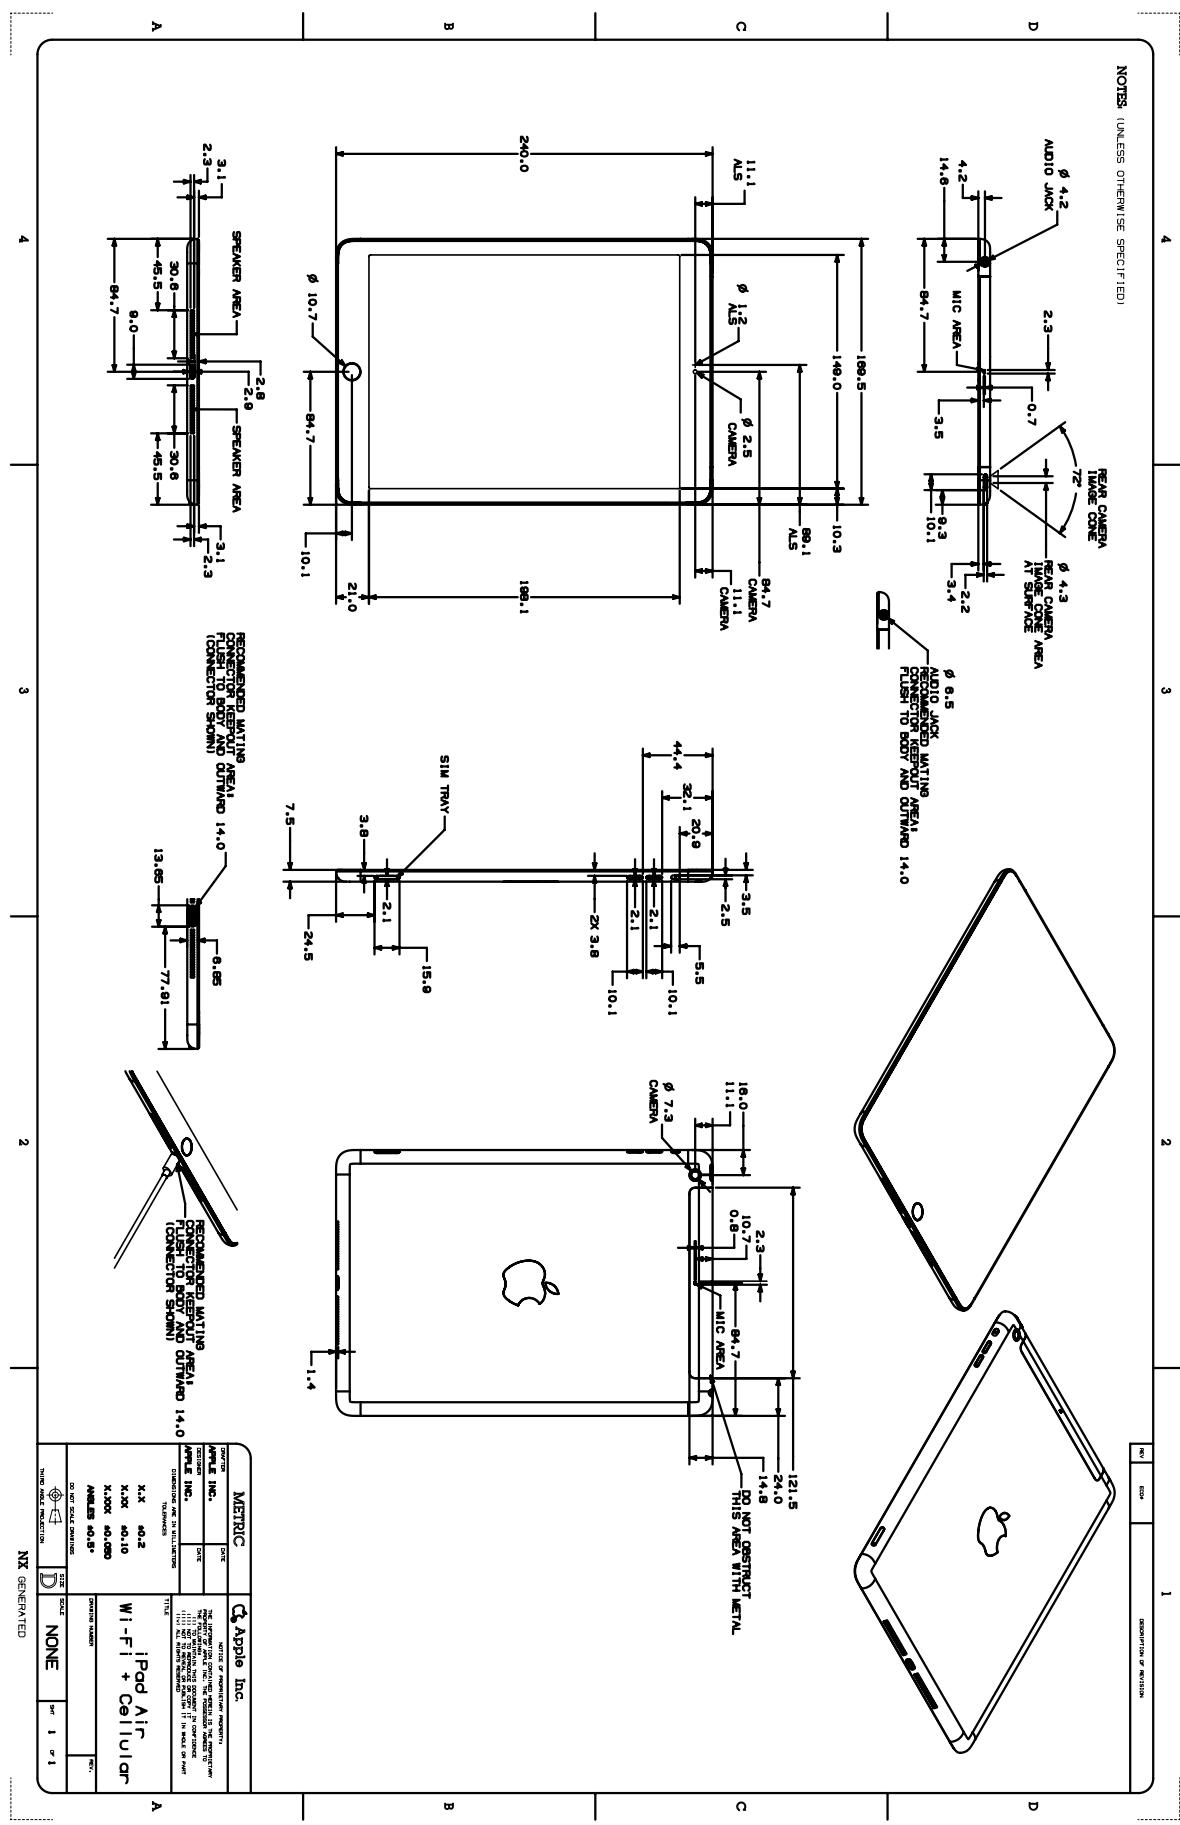

29.68 iPad mini with Wi-Fi

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

The technical drawing consists of four views labeled A, B, C, and D:

- View A:** Front view showing the screen area with speaker areas at the top and bottom. Dimensions include 200.1 (top), 161.2 (bottom), 7.2 (left), 2x 1.4 (right), and various internal components like cameras and connectors.
- View B:** Back view showing the rear camera and its lens. Dimensions include 13.65 (top), 60.55 (bottom), and 2x 3.8 (left).
- View C:** Side view showing the thickness of 10.1 mm and various ports and sensor locations.
- View D:** Another side view showing the profile and port locations.

**Callouts:**

- RECOMMENDED MATING AREA:** FLUSH TO BODY OUTWARD 14.0 mm (shown for both front and back connectors).
- RECOMMENDED MATING AREA:** FLUSH TO BODY OUTWARD 14.0 mm (shown for the side connector).

**Metric Table:**

Metric	Apple Inc.
APPLIANCE	DATE
APPLIANCE	REV.
APPLIANCE	DESCRIPTION
APPLIANCE	REMARKS
X.X	40.2
X.XX	40.10
X.XX	40.050
ANGLES	10.5°
DO NOT SCALE DRAWINGS	PRINTED DRAWINGS
SCALE	1:1
NOTE	NONE
NOTE	Set 1 of 1







**Notes:**

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- RECOMMENDED MATING AREA: FLUSH TO BODY OUTWARD 14.0 mm
- RECOMMENDED MATING AREA: FLUSH TO BODY OUTWARD 14.0 mm
- RECOMMENDED MATING AREA: FLUSH TO BODY OUTWARD 14.0 mm
- NOTES: (UNLESS OTHERWISE SPECIFIED)

29.69 iPad mini with Wi-Fi + Cellular




29.70 iPad (4th generation) with Wi-Fi

**NOTES (UNLESS OTHERWISE SPECIFIED)**

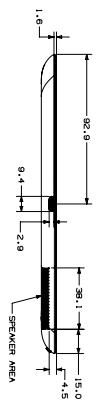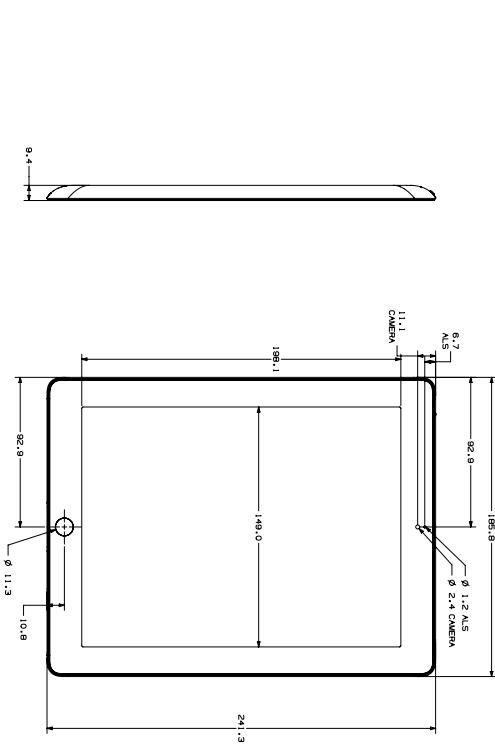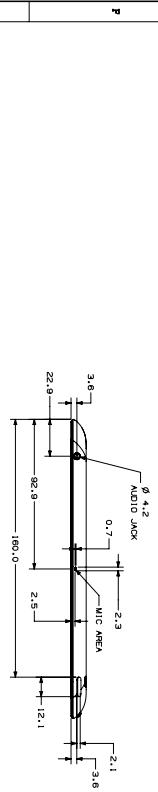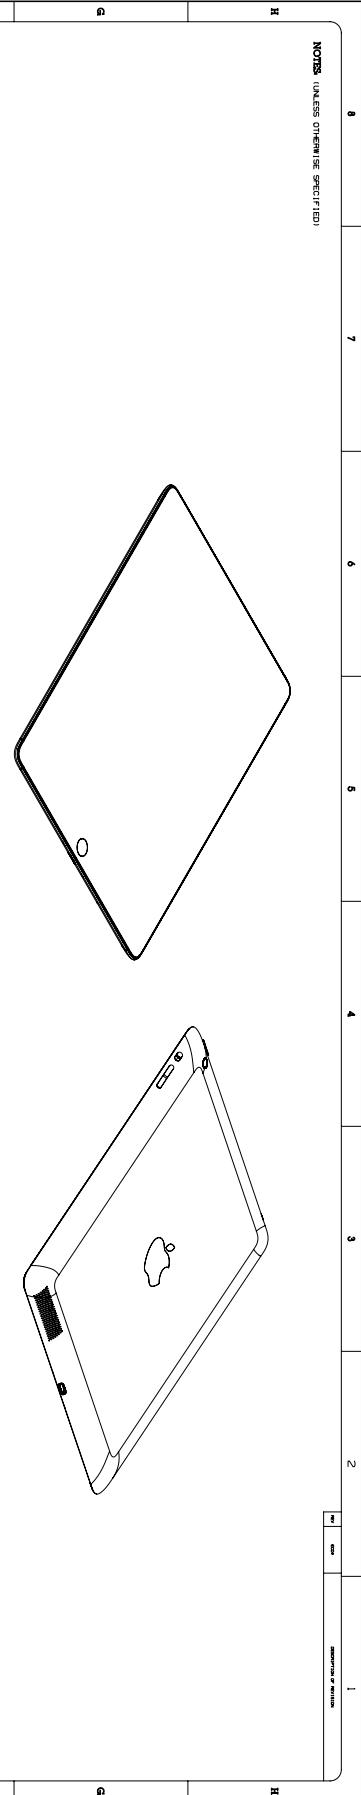


29.71 iPad (4th generation) with Wi-Fi + Cellular


**NOTES (UNLESS OTHERWISE SPECIFIED)**

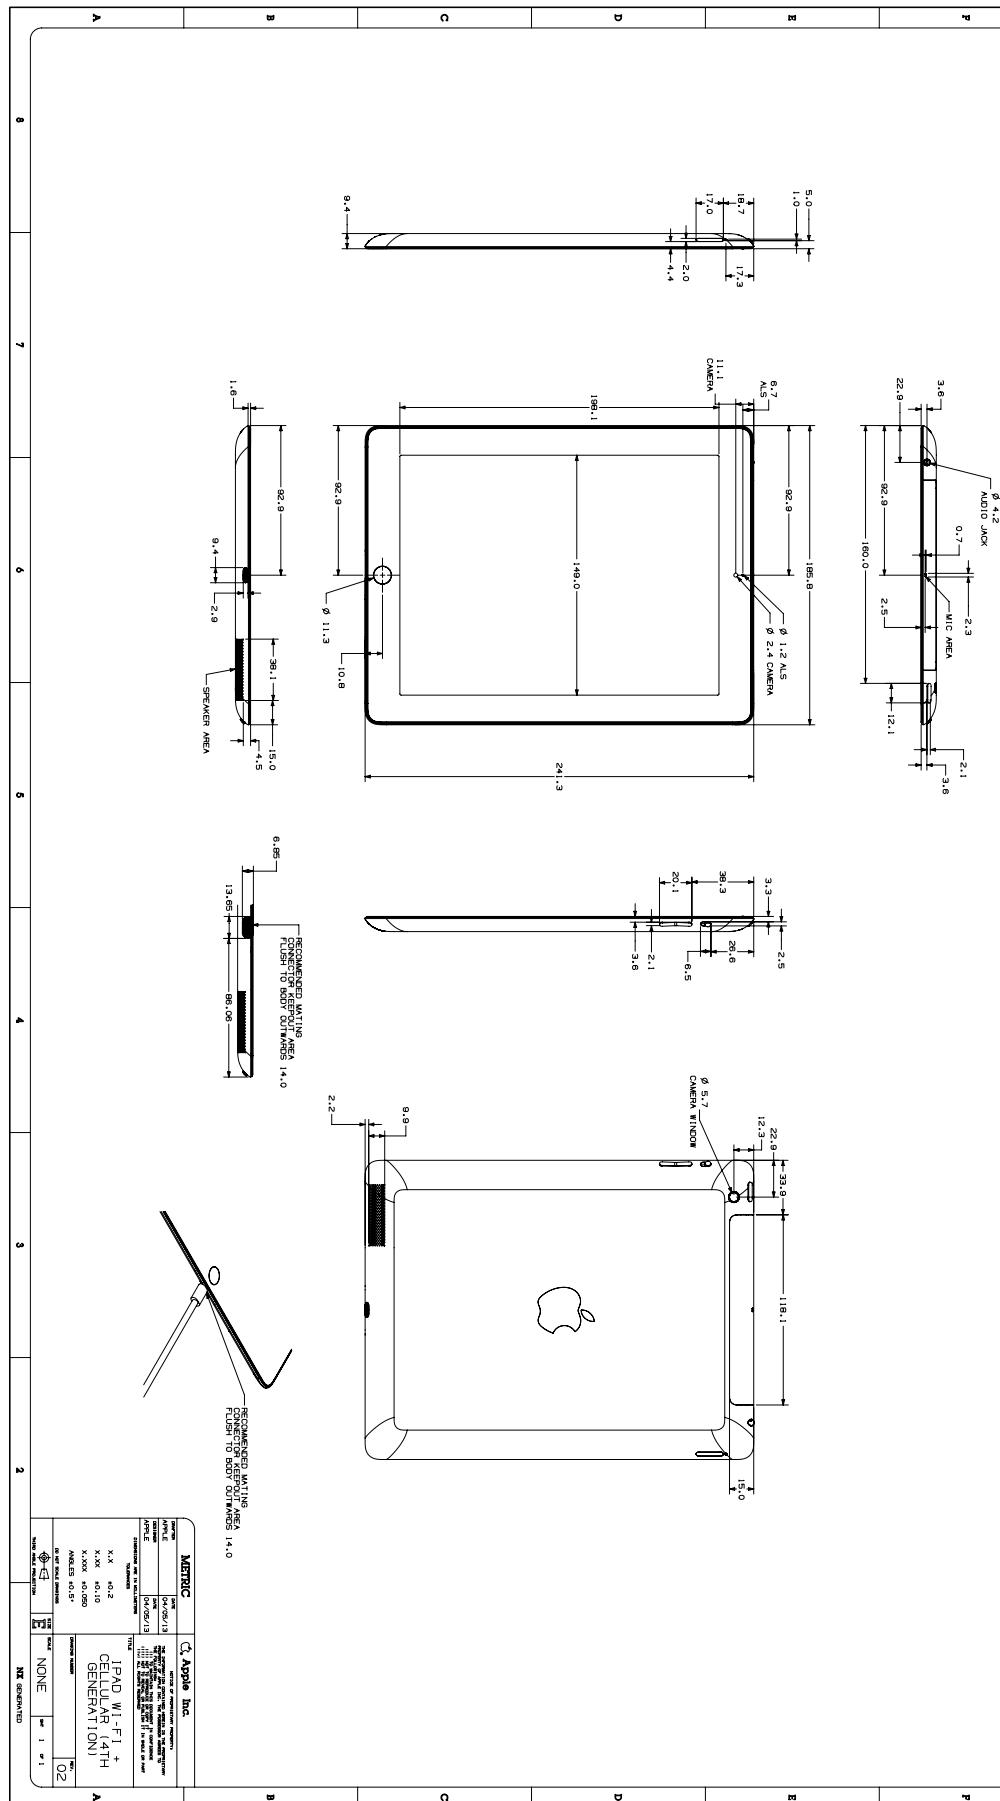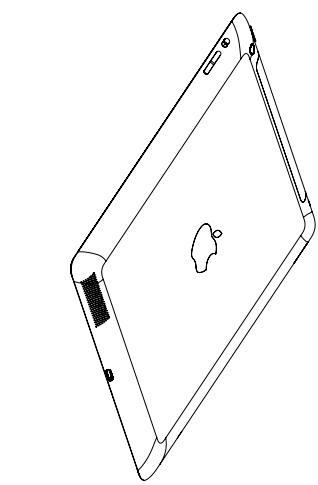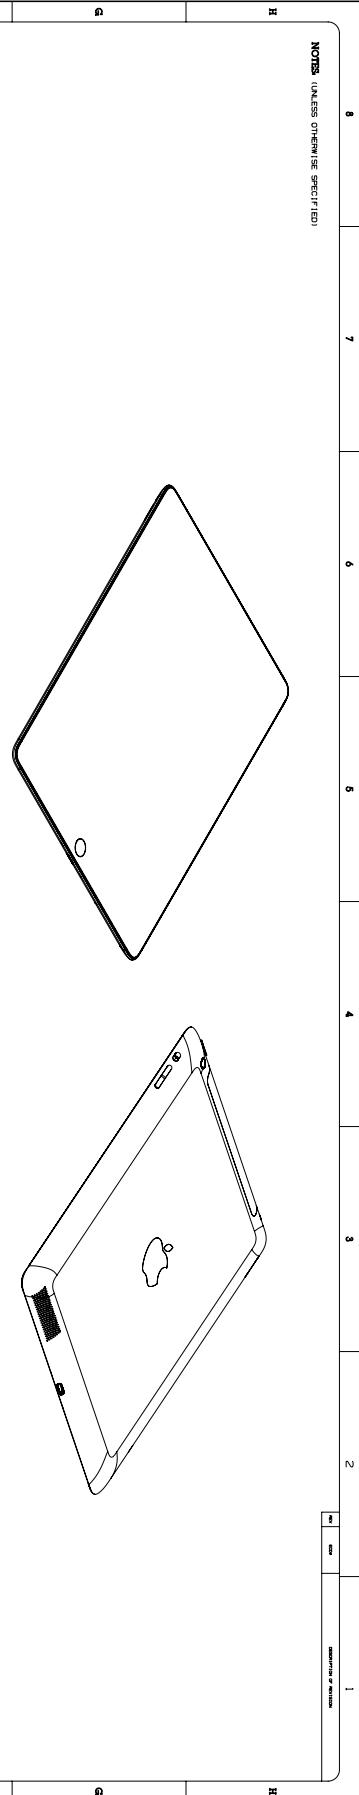

## 29.72 iPod touch (6th generation) & iPod touch (7th generation)

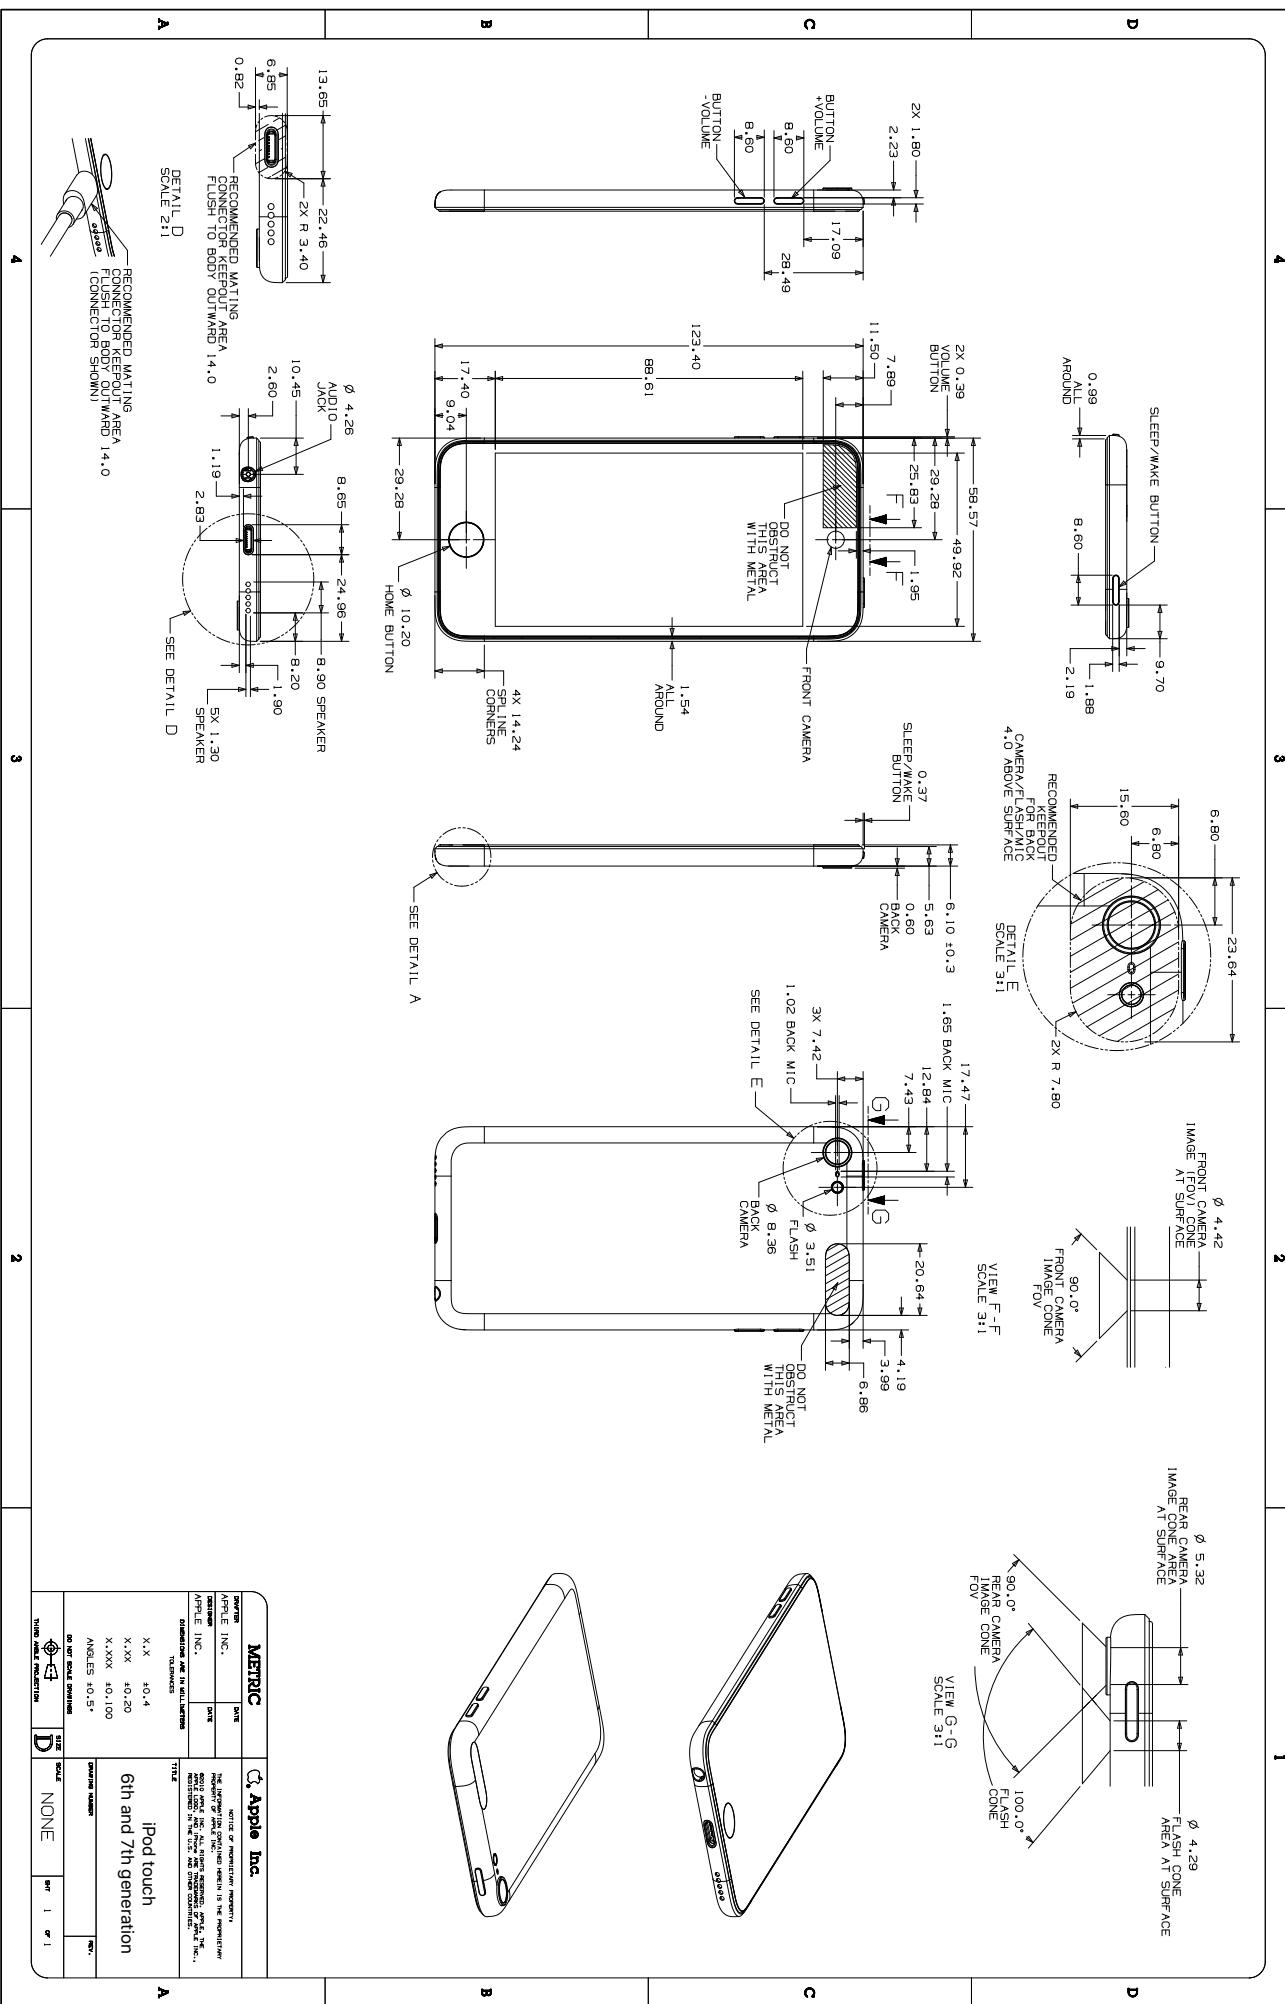

## 29.73 iPod touch (5th generation)

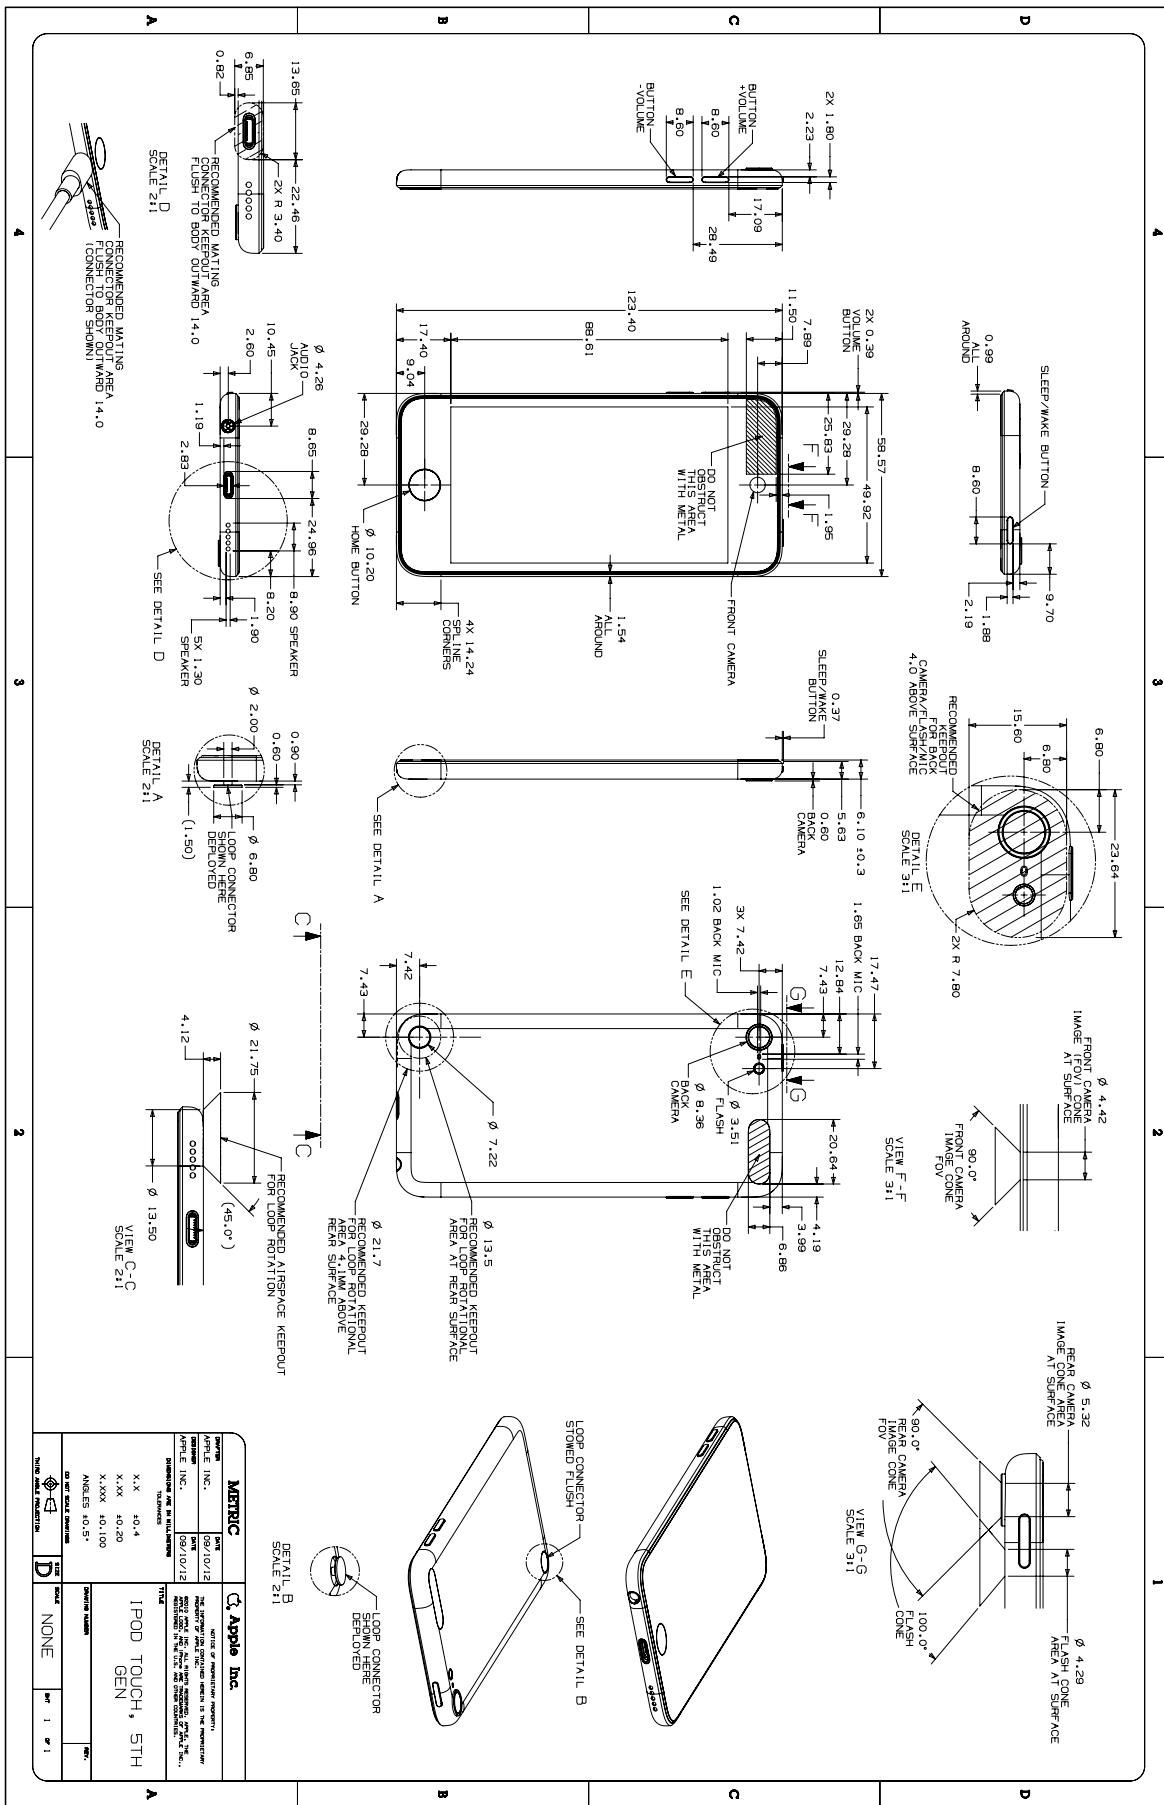

29.74 Apple Watch Series 5, 44 mm

**[1]** CASE DOES NOT INTERFERE WITH CLOCK OR ROTATION FUNCTION OF DIGITAL CROWN  
**[2]** CASE DOES NOT APPLY FORCE ON DIGITAL CROWN  
**[3]** CASE DOES NOT OBSTRUCT FACE OF CHRONO  
**[4]** CASE DOES NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS AND ALTIMETER  
**[5]** AND MUST NOT DEGRADE ACOSTIC OR WATER EJECTION PERFORMANCE  
**[3]** NO METAL CASES ALLOWED DUE TO ANTENNA FUNCTION  
**[4]** CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE

- [3] CASE DOES NOT OBSTRUCT THE WATCH OPTICAL SENSORS
- [6] CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS
- [7] CASE DOES NOT CONTACT THE WATCH COVER GLASS
- [8] CASE DOES NOT CONTACT ELECTRICAL SENSORS
- [9] CASE DOES NOT CONTAIN FERROMAGNETIC MATERIAL

SPEAKER AND ANIMETER  
SECTION K-13

卷之三

-7.83

10

— १२३४५६७

卷之三

**CORNER PROFILE (ALL 4 CORNERS)**  
**DETAIL B**

6

N

NA GENERALE

2019-11-12 | Copyright © 2019 Apple Inc. All Rights Reserved.

## 29.75 Apple Watch Series 5, 40 mm

**NOTES (UNLESS OTHERWISE SPECIFIED)**

- CASE DOES NOT INTERFERE WITH CLOCK UP/DOWN FUNCTION
  - CASE DOES NOT OBSTRUCT THE WATCH OPTICAL SENSORS
  - CASE DOES NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS AND MUST NOT DEGRADE ACQUISITION OF WATER EMISSIONS
  - NO METAL CASES ALLOWED DUE TO ANTENNA FUNCTION
  - CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE
  - CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS
  - CASE DOES NOT CONTACT THE WATCH COVER GLASS
  - CASE DOES NOT CONTAIN ELECTRICAL SENSORS
  - CASE DOES NOT CONTAIN FERROMAGNETIC MATERIAL

卷之三


1

— AROI

1

10

10

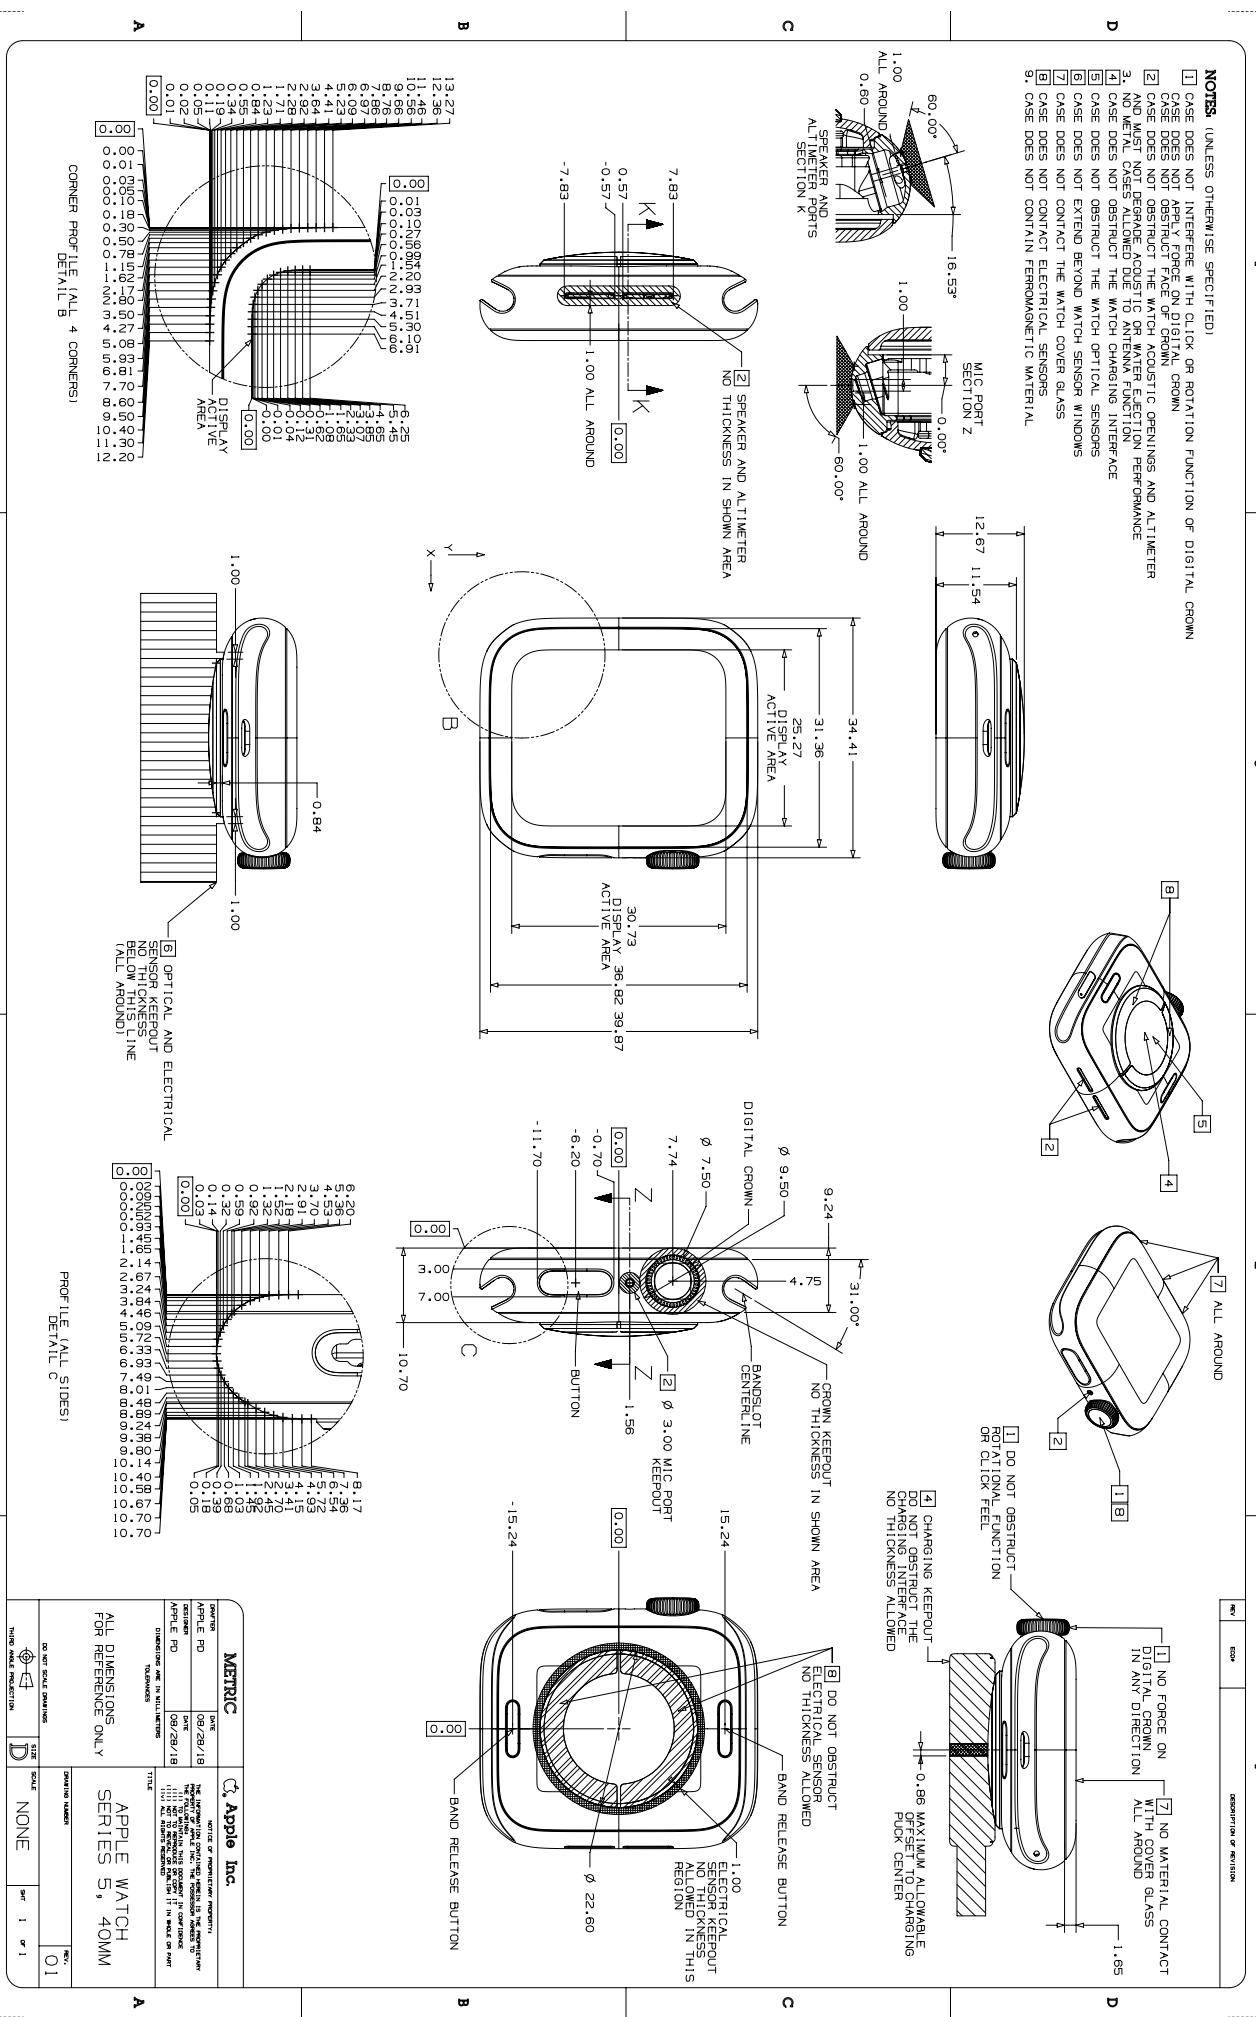










29.77 Apple Watch Series 5 Ceramic, 40 mm

**NOTES. (UNLESS OTHERWISE SPECIFIED)**

- |   |  |
|---|--|
| 1 | CASE DOES NOT INTERFERE WITH CLICK OR ROTATION FUNCTION OF DIGITAL CROWN                                       |
| 2 | CASE DOES NOT APPLY FORCE ON DIGITAL CROWN<br>CASE DOES NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS AND ALTIMETER |
| 3 | AND ALTITUDE MEASUREMENT FUNCTION<br>AND ALTITUDE MEASUREMENT FUNCTION   |
| 4 | CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE  |
| 5 | CASE DOES NOT OBSTRUCT THE WATCH OPTICAL SENSORS   |
| 6 | CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS   |
| 7 | CASE DOES NOT CONTACT THE WATCH COVER GLASS  |
| 8 | CASE DOES NOT CONTAIN ELECTRICAL SENSORS   |
| 9 | CASE DOES NOT CONTAIN FERROMAGNETIC MATERIAL   |

DESCRIPTION OF REVISIONS

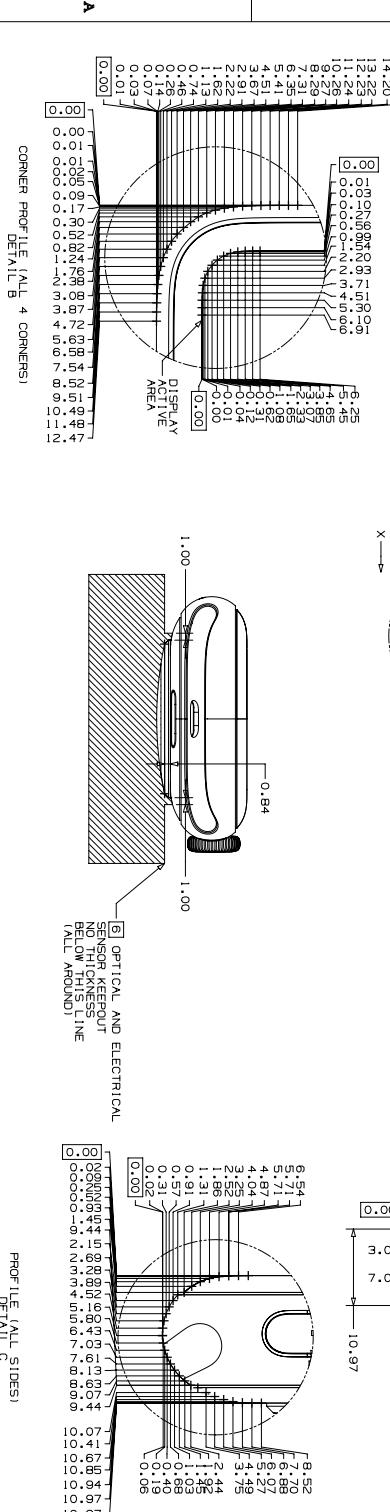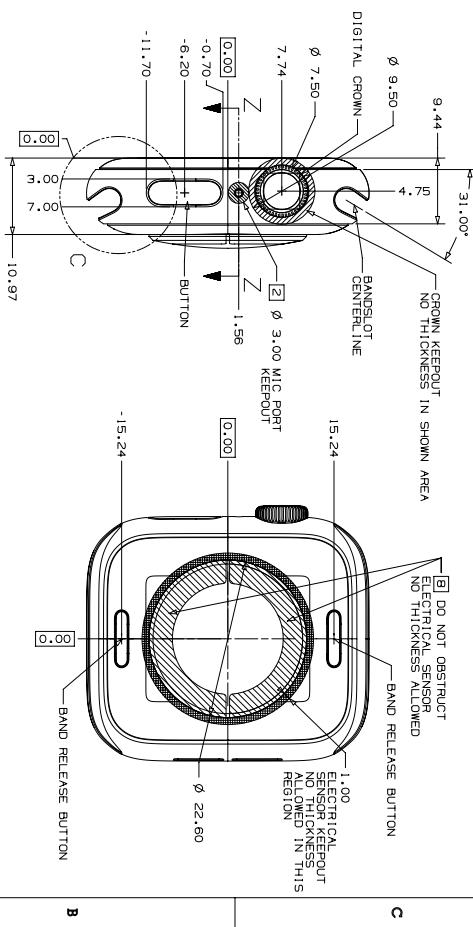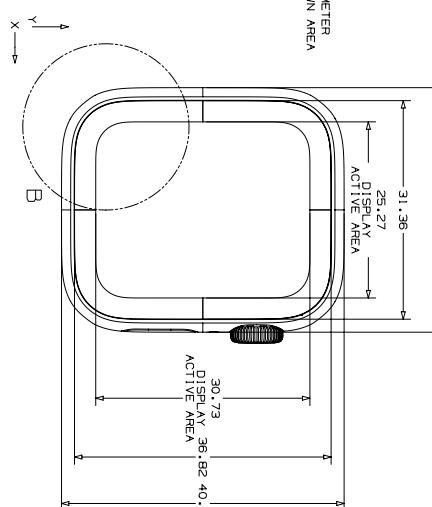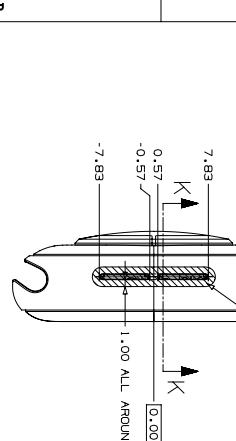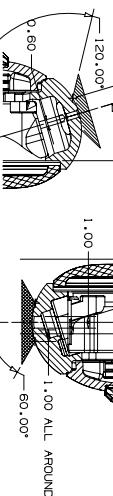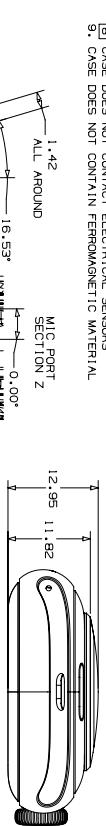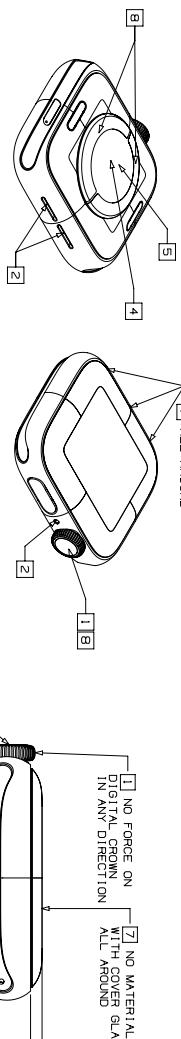







<b>METRIC</b>	
<b>DATE</b>	NOTICE OF INFRINGEMENT REPORTED
APRIL 10 <sup>th</sup>	TO THE APPLICANT
RECEIVED	BY THE APPLICANT
APRIL 10 <sup>th</sup>	TO THE TRADE
RECEIVED	BY THE TRADE
DIMENSIONS IN MILLIMETERS	
NAME(S)	
ALL DIMENSIONS FOR REFERENCE ONLY	
TITLE	
APPLE WATCH SERIES 5, CERAMIC, 40MM	
PRINT OR SIGN	RECEIVED
O 1	



## 29.79 Apple Watch Series 4, 40 mm

**NOTES.** (UNLESS OTHERWISE SPECIFIED)

- [1] CASE DOES NOT INTERFERE WITH CLICK OR ROTATION FUNCTION OF DIGITAL CROWN
  - [2] CASE DOES NOT APPLY FORCE ON DIGITAL CROWN
  - [3] CASE DOES NOT OBSTRUCT THE WATCH ACOMATIC OPENINGS AND ALTIMETER AND MUST NOT DEGRADE ACOUSTIC OR WATER EJECTION PERFORMANCE
  - [4] NO METAL CASES ALLOWED DUE TO ANTENNA FUNCTION
  - [5] CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE
  - [6] CASE DOES NOT OBSTRUCT THE WATCH OPTICAL SENSORS
  - [7] CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS
  - [8] CASE DOES NOT CONTACT THE WATCH COVER GLASS
  - [9] CASE DOES NOT CONTACT ELECTRICAL SENSORS

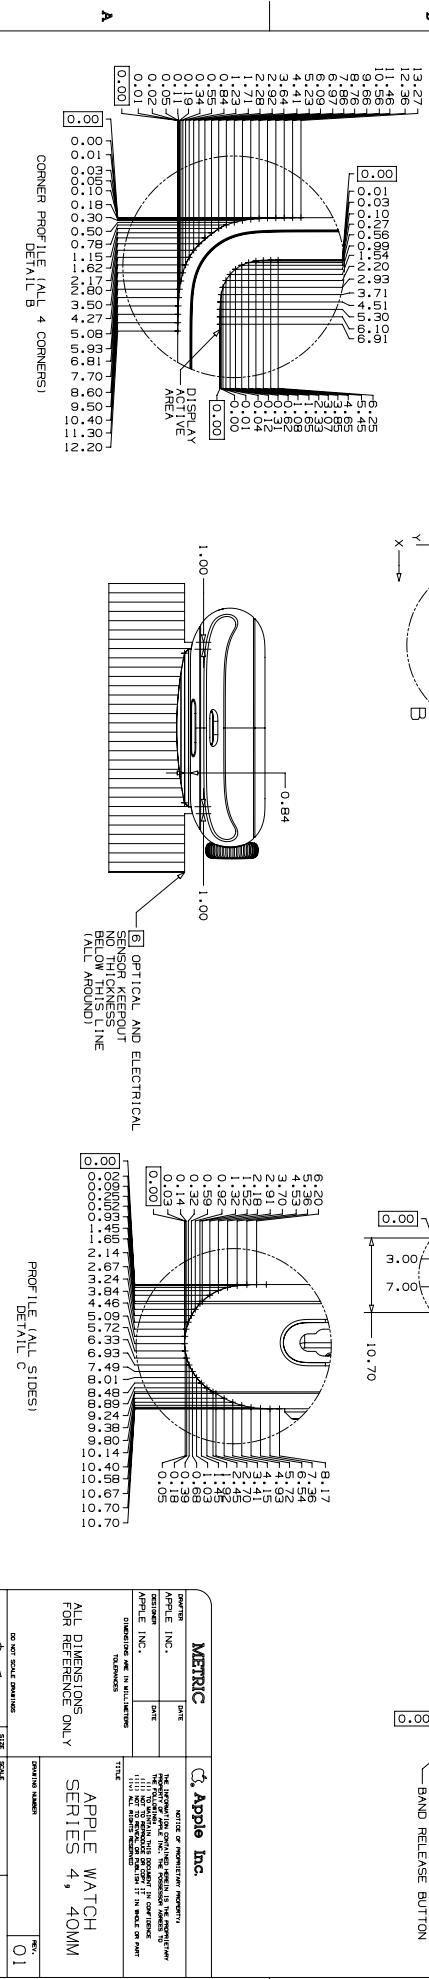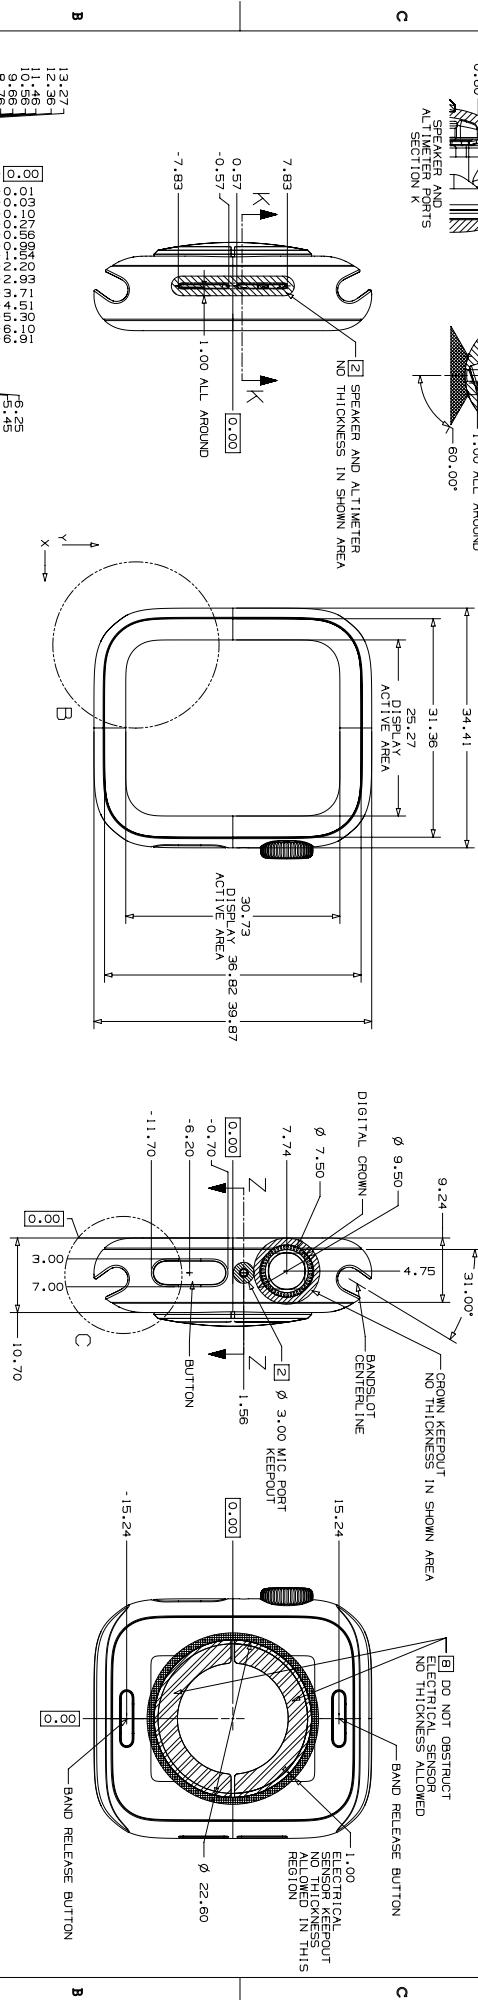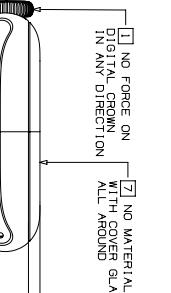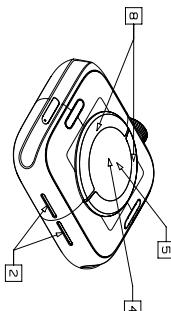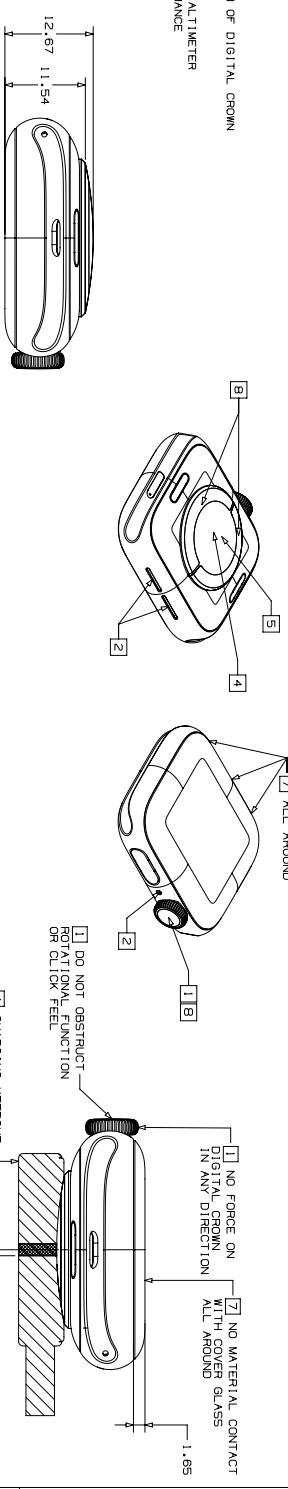

CORNER PROFILE (ALL 4 CORNERS)

4

ج

23

NX GENERATE




29.81 Apple Watch Series 3 Ceramic, 38 mm

29.82 Apple Watch Series 3 Metal, 42 mm

**NOTES.** (UNLESS OTHERWISE SPECIFIED)

- 1** CASE DOES NOT INTERFERE WITH DIGITAL CROWN ROTATION FUNCTION OF DIGITAL CROWN  
**2** CASE DOES NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS AND ALTIMETER  
**3** CASE DOES NOT OBSTRUCT THE WATCH ANTENNA WITH METAL  
**4** CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE  
**5** CASE DOES NOT EXTEND BEYOND THE WATCH OPTICAL SENSORS  
**6** CASE DOES NOT EXTEND BEYOND THE WATCH SENSOR WINDOWS  
**7** CASE DOES NOT CONTACT THE WATCH COVER GLASS

13:35 GPS

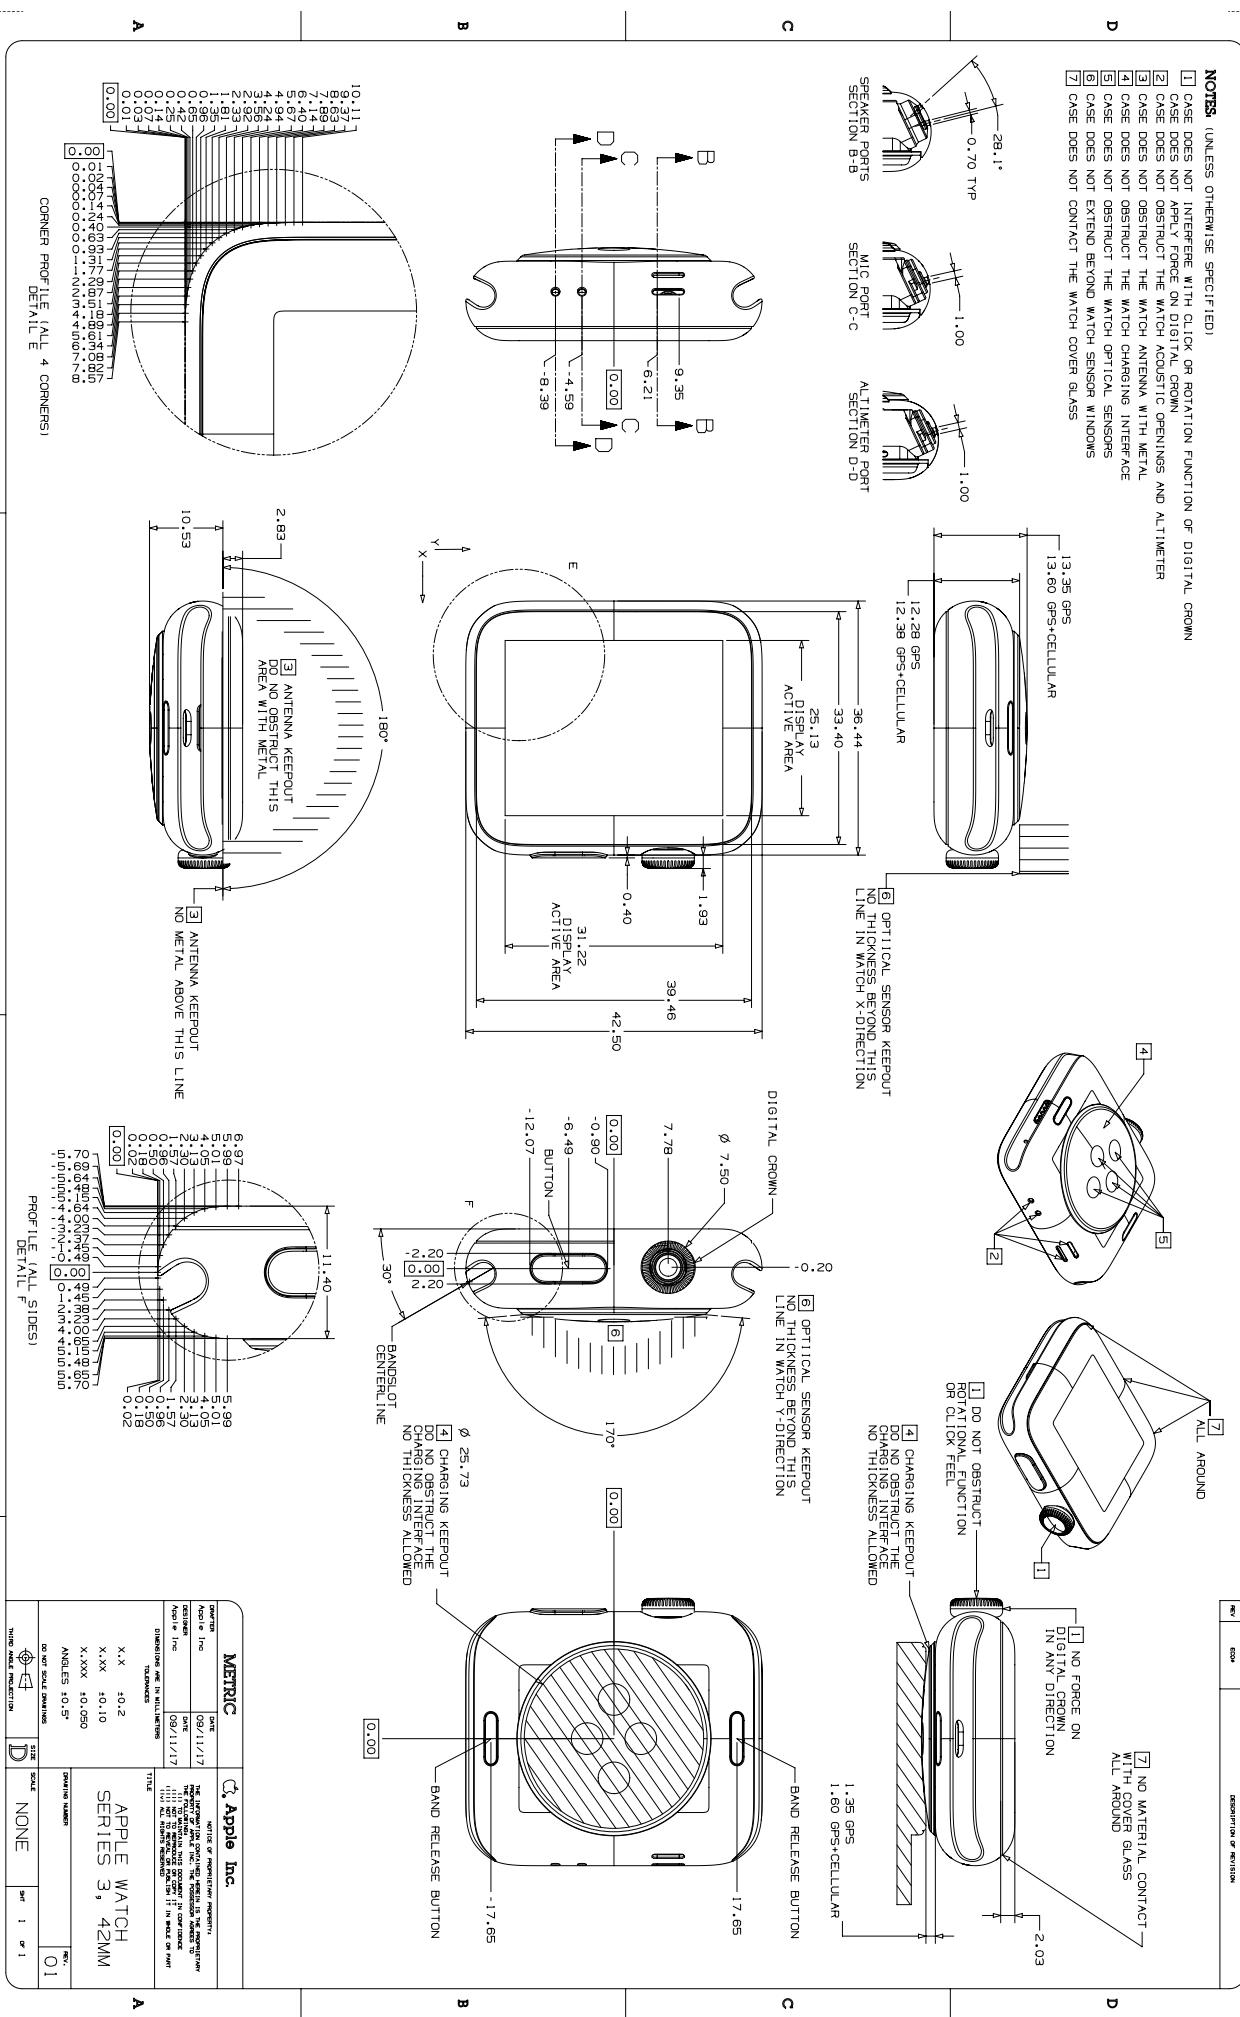


29.83 Apple Watch Series 3 Metal, 38 mm

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

- 1 CASE DOES NOT INTERFERE WITH CLICK OR ROTATION FUNCTION OF DIGITAL CROWN
  - 2 CASE DOES NOT INTERFERE WITH THE WATCH ANTENNA WITH METAL
  - 3 CASE DOES NOT OBSTRUCT THE WATCH ANTENNA WITH METAL
  - 4 CASE DOES NOT OBSTRUCT THE WATCH CHARGING INTERFACE
  - 5 CASE DOES NOT OBSTRUCT THE WATCH OPTICAL SENSORS
  - 6 CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS
  - 7 CASE DOES NOT CONTACT THE WATCH COVER GLASS

1

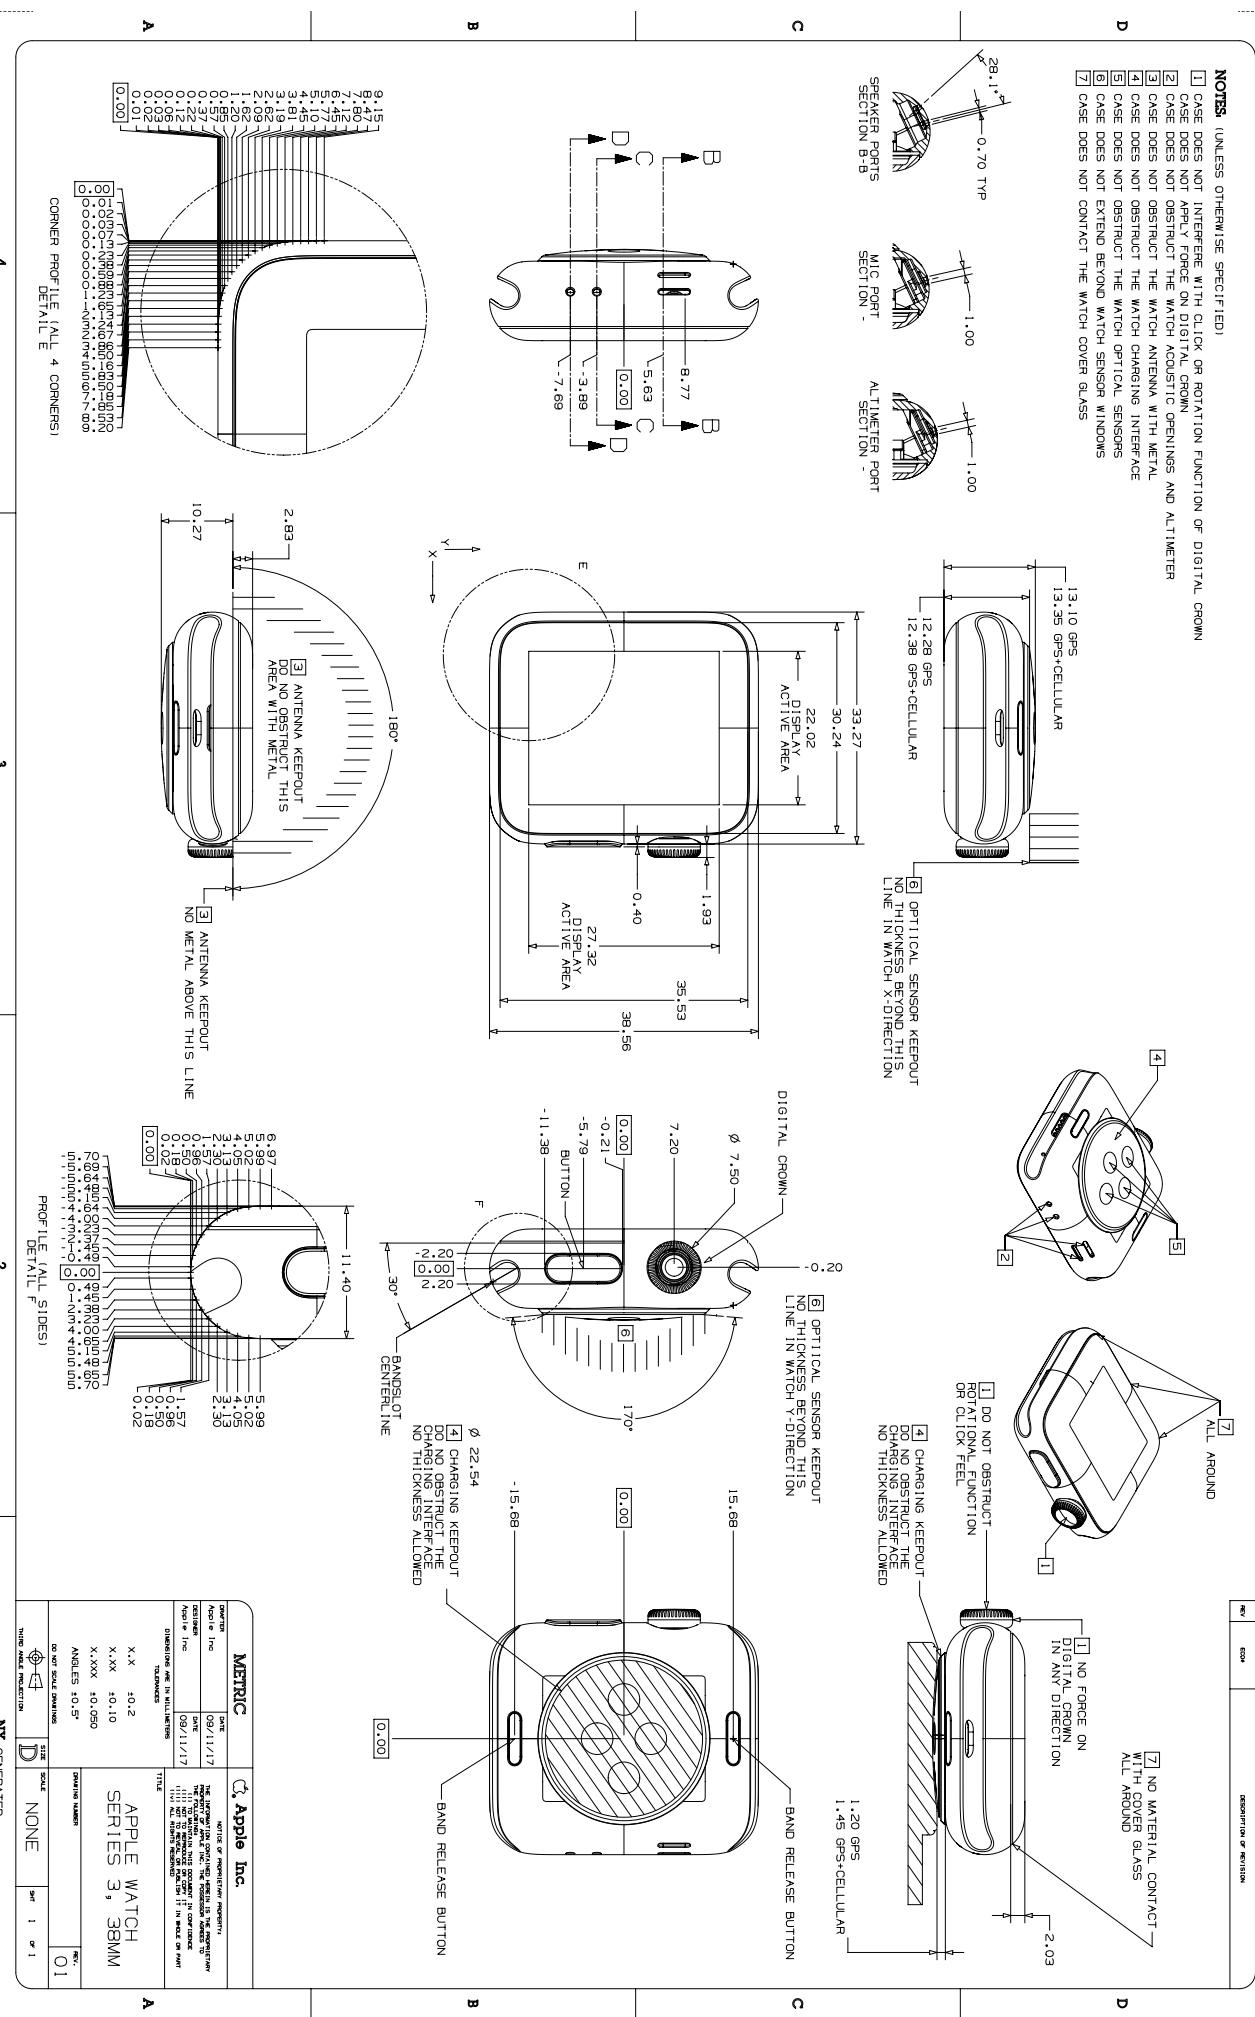

29.84 Apple Watch Series 2 Ceramic, 42 mm

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

- [1] CASE DOES NOT INTERFERE WITH CLOCK OR ROTATION FUNCTION OF DIGITAL CROWN
- [2] CASE DOES NOT APPLY FORCE ON DIGITAL CROWN
- [3] CASE DOES NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS AND ALTIMETER
- [4] CASE DOES NOT OBSTRUCT THE WATCH ANTENNA WITH METAL
- [5] CASE DOES NOT EXTEND BEYOND WATCH SENSOR WINDOWS
- [6] CASE DOES NOT CONTACT THE WATCH COVER GLASS
- [7] CASE DOES NOT CONTACT THE WATCH COVER GLASS

**FRONT VIEW**

**SIDE PROFILE**

**CROSS-SECTION**

**TOP VIEW**

**BACK VIEW**

**DETAILS**


Metric	Value
APPLIE INC.	ONE
APPLIE INC.	ONE
Dimensions (in millimeters)	
Thickness	0.00
Width	42.00
Height	42.00
Depth	0.00
Weight	28.00
Color	White
Material	Ceramic

**NOTES:**

- [1] DO NOT OBSTRUCT ROTATIONAL FUNCTION OR CLOCK FEEL
- [2] NO FORCE ON DIGITAL CROWN IN ANY DIRECTION
- [3] NO MATERIAL CONTACT WITH WATCH GLASS
- [4] CHARGING KEEPOUT DO NOT OBSTRUCT THE CHARGING INTERFACE NO THICKNESS ALLOWED
- [5] OPTICAL SENSOR KEEPOUT NO THICKNESS BEYOND THIS LINE IN WATCH-X-DIRECTION
- [6] OPTICAL SENSOR KEEPOUT NO THICKNESS BEYOND THIS LINE IN WATCH-Y-DIRECTION
- [7] NO MATERIAL CONTACT WITH WATCH GLASS

29.85 Apple Watch Series 2 Ceramic, 38 mm

# 29.86 Apple Watch Series 2 Metal, 42 mm

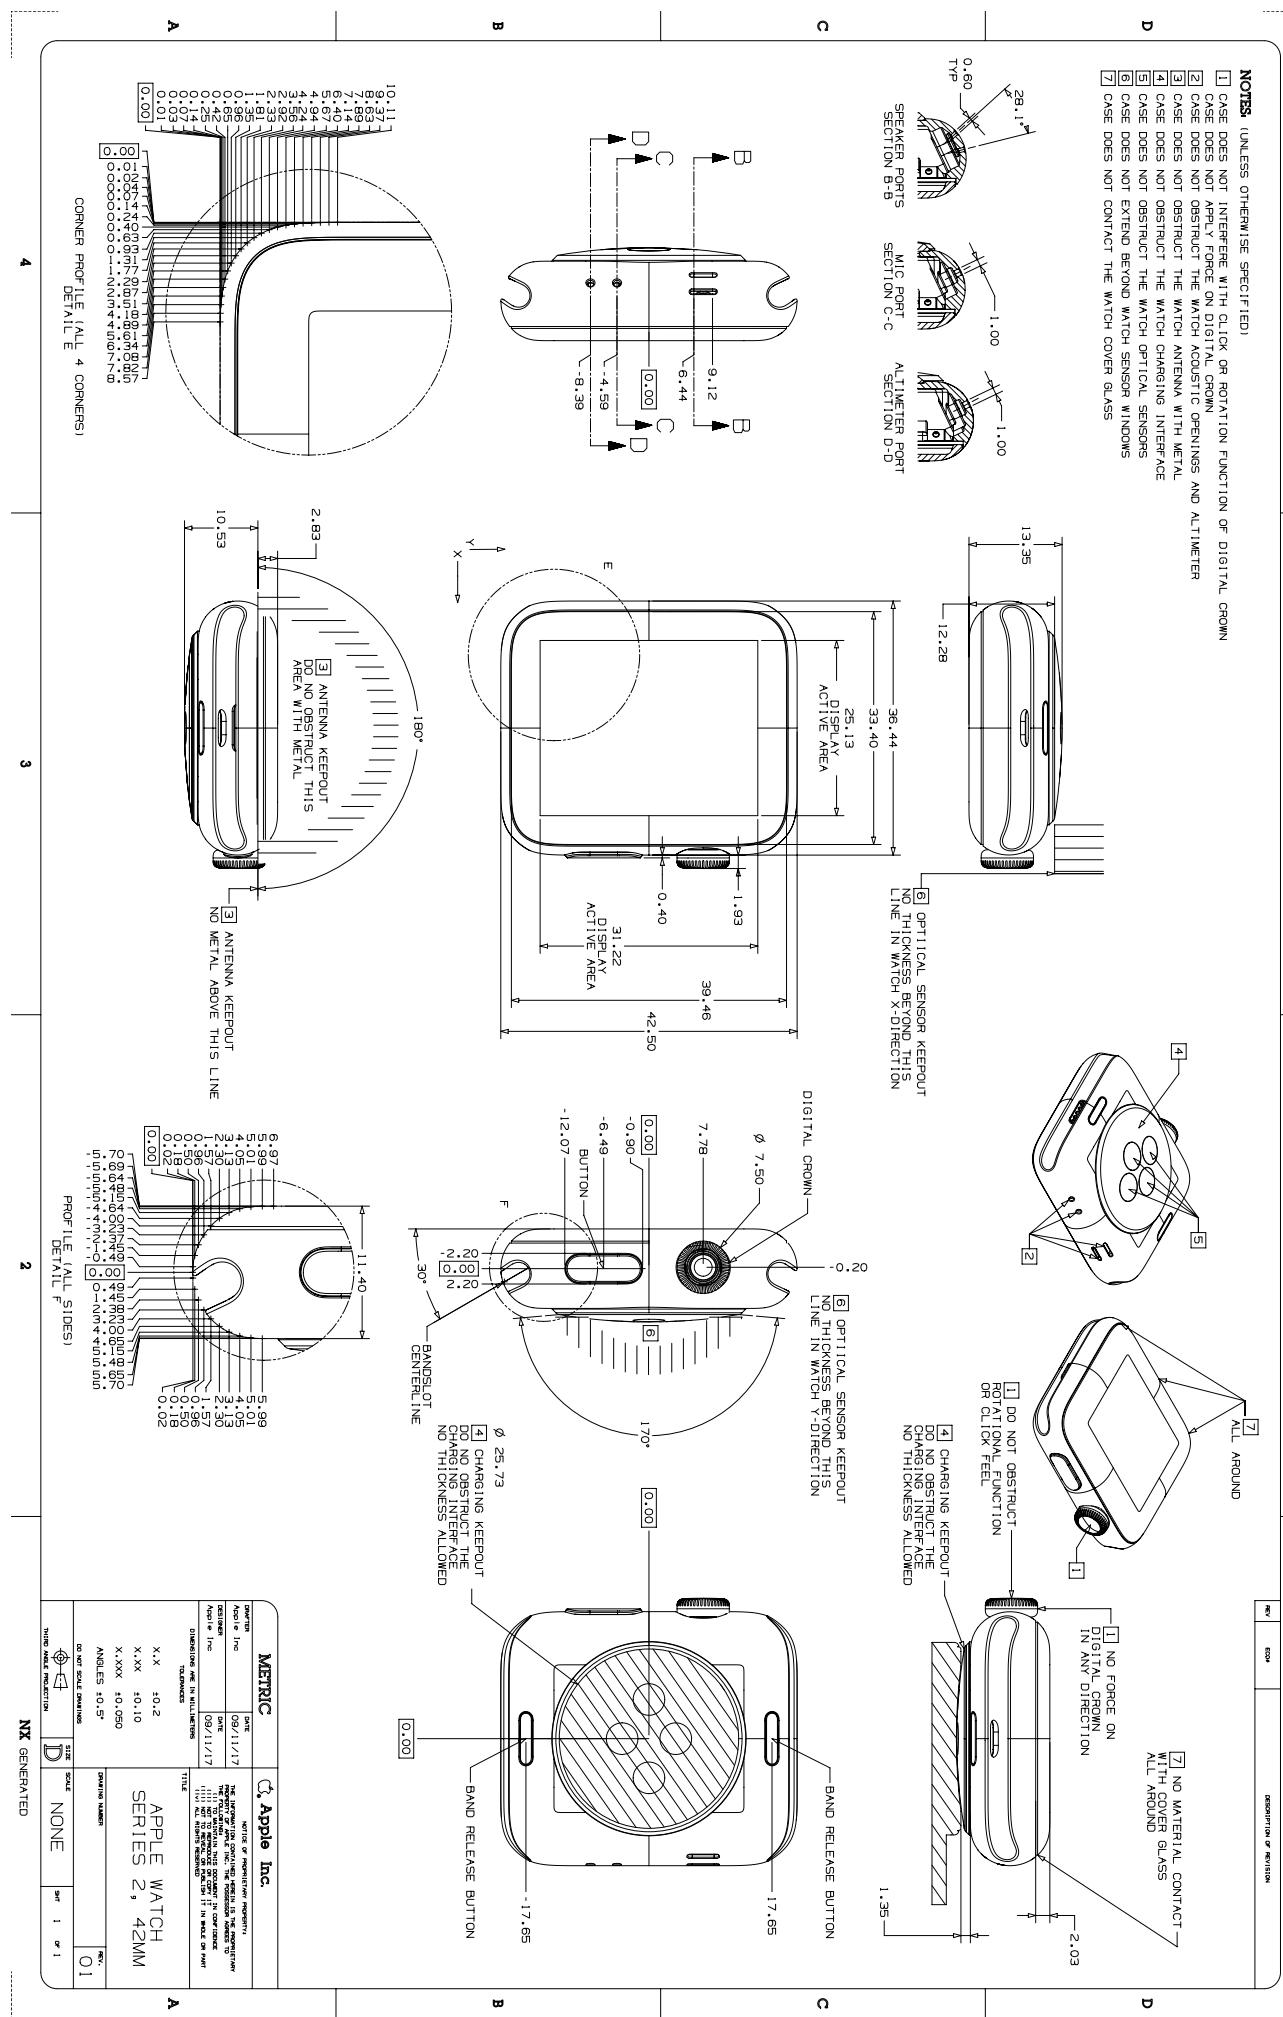

29.87 Apple Watch Series 2 Metal, 38 mm

29.88 Apple Watch (1st generation) & Apple Watch Series 1, 42 mm

29.89 Apple Watch (1st generation) & Apple Watch Series 1, 38 mm

**NOTES (UNLESS OTHERWISE SPECIFIED)**

- [2] DO NOT OBSTRUCT THE WATCH ACOUSTIC OPENINGS; MIC, AND SPEAKER
- [3] DO NOT OBSTRUCT THE WATCH ANTENNA WITH METAL
- [4] DO NOT OBSTRUCT THE WATCH CHARGING PAD
- [5] DO NOT OBSTRUCT THE WATCH HEART RATE SENSORS
- [6] DO NOT EXTEND BEYOND WATCH SENSOR WINDOWS
- [7] DO NOT CONTACT THE WATCH COVER GLASS
- [8] DO NOT INTERFERE WITH CLICK OR ROTATION FUNCTION OF DIGITAL CROWN
- [9] DO NOT APPLY FORCE ON DIGITAL CROWN

**DETAILS**

**A**

**B**


**C**

**D**

Metric	Apple Inc.
Part No.	04-02415
Rev.	04-02415
Material	Alloy, Plastic
Dimensions (inches)	0.062 x 2.44 x 0.39
Dimensions (millimeters)	1.57 x 62.0 x 10.0
Title	APPLE WATCH 38 mm
Opening Width	0.062
Scale	None
Rev.	01
Date	01/10/2015
Time	00:00
Page	1

29.90 AirPods Pro Wireless Charging Case

**NOTES:** UNLESS OTHERWISE SPECIFIED  
[1] ACCESSORIES INTRUDING INTO SHADED REGIONS WILL NEGATIVELY AFFECT PRODUCT PERFORMANCE.  
[2] TO ENSURE FULL FUNCTIONALITY, DO NOT OBSTRUCT THIS AREA WITH METAL OR OTHER CONDUCTIVE MATERIAL.

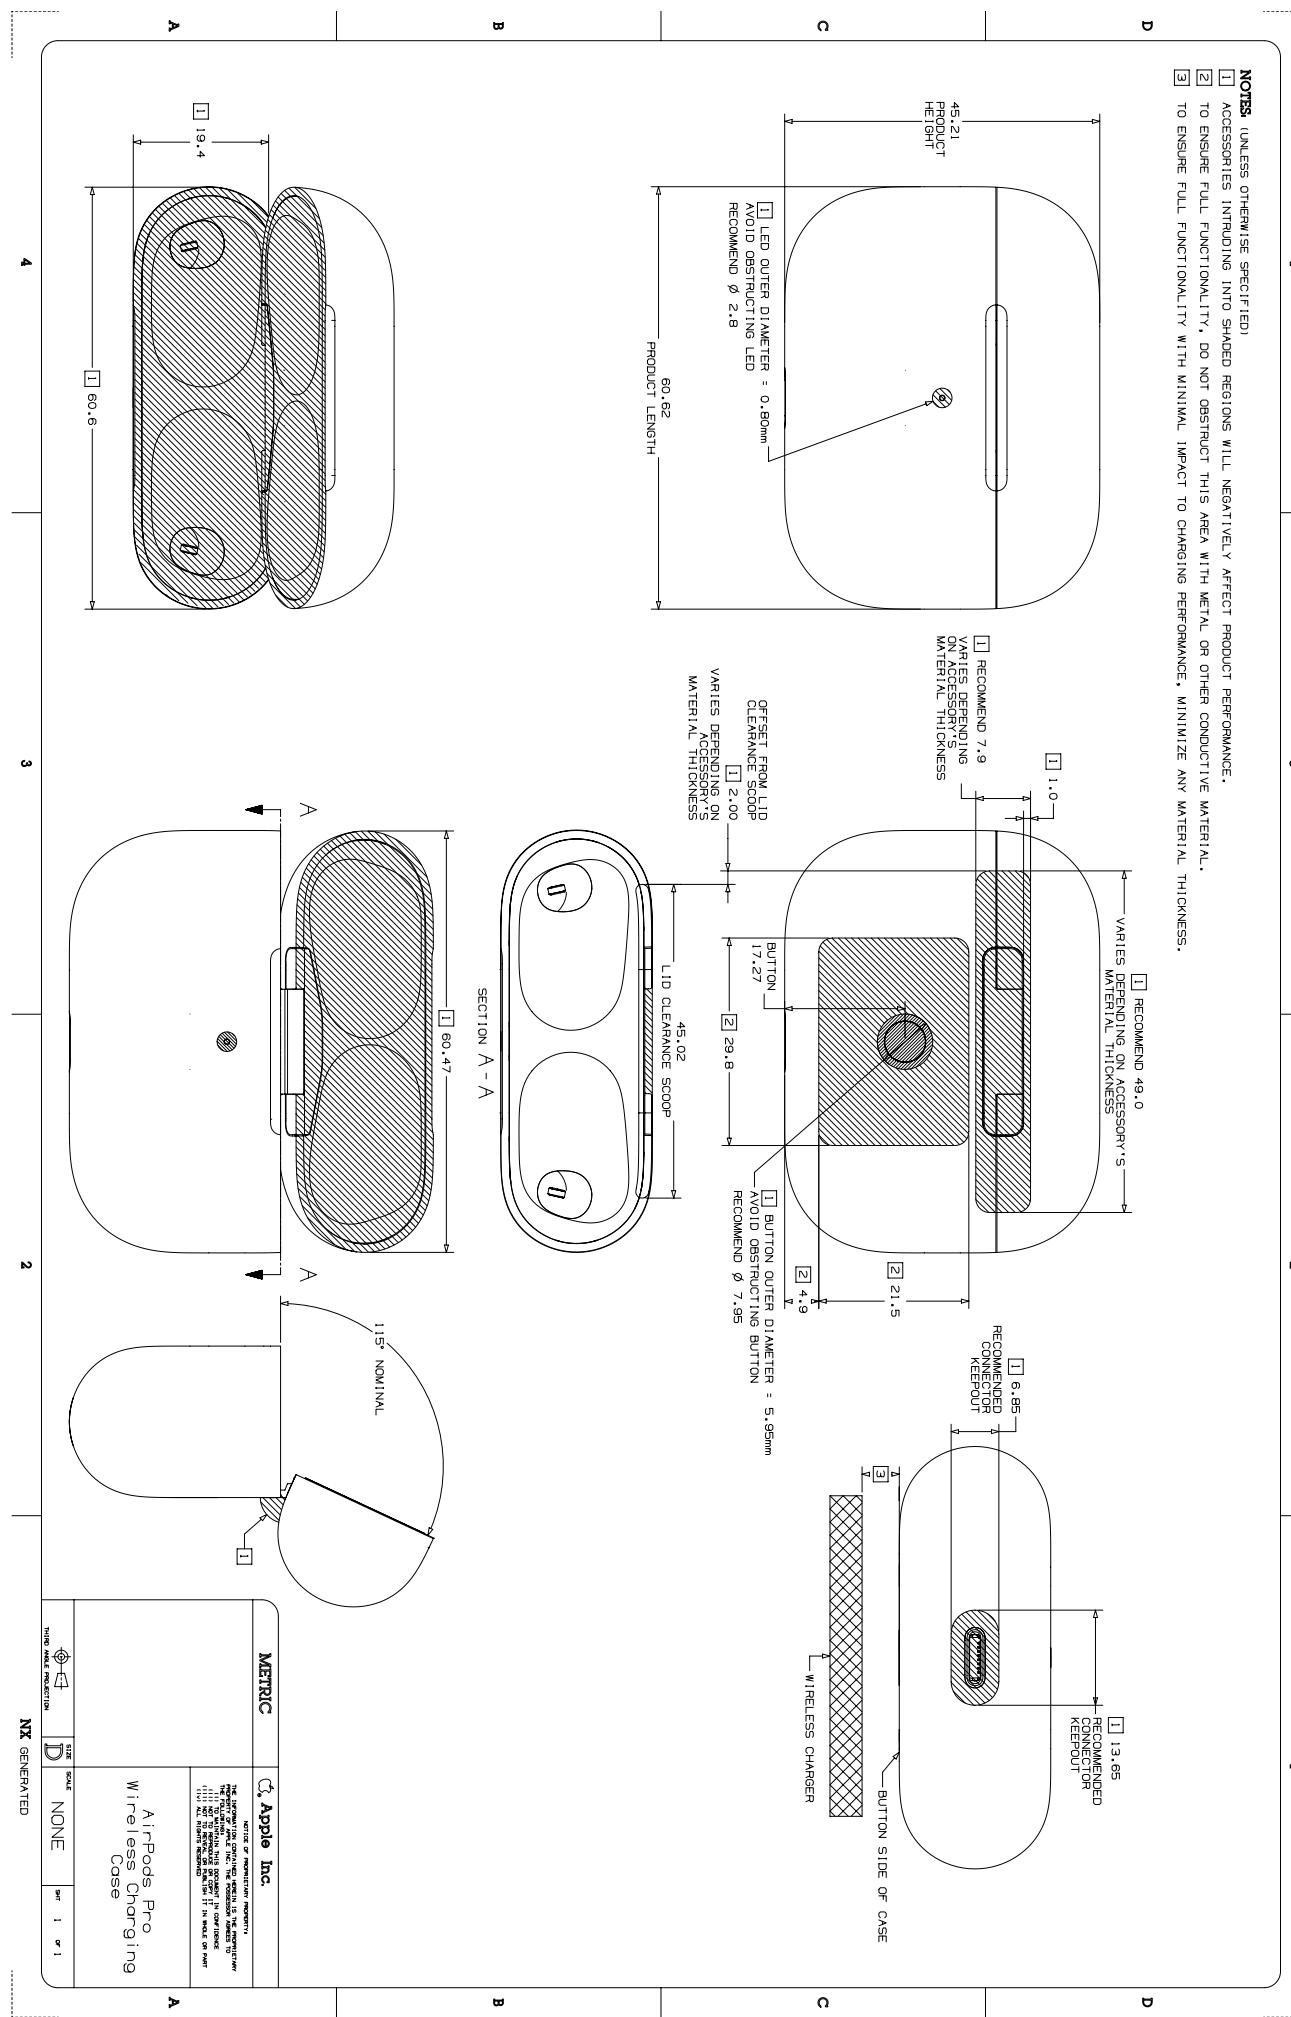

# 29.91 AirPods Wireless Charging Case

**NOTES:** UNLESS OTHERWISE SPECIFIED

- [1] ACCESSORIES INTRUDING INTO SHADED REGIONS WILL NEGATIVELY AFFECT PRODUCT PERFORMANCE.
- [2] TO ENSURE FULL FUNCTIONALITY, DO NOT OBSTRUCT INDICATED AREA WITH METAL OR OTHER CONDUCTIVE MATERIAL.
- [3] TO ENSURE FULL FUNCTIONALITY WITH MINIMAL IMPACT TO CHARGING PERFORMANCE, MINIMIZE ANY MATERIAL THICKNESS.

REV. 0000 | DESCRIPTION OF Revision





4

3

2

1

D

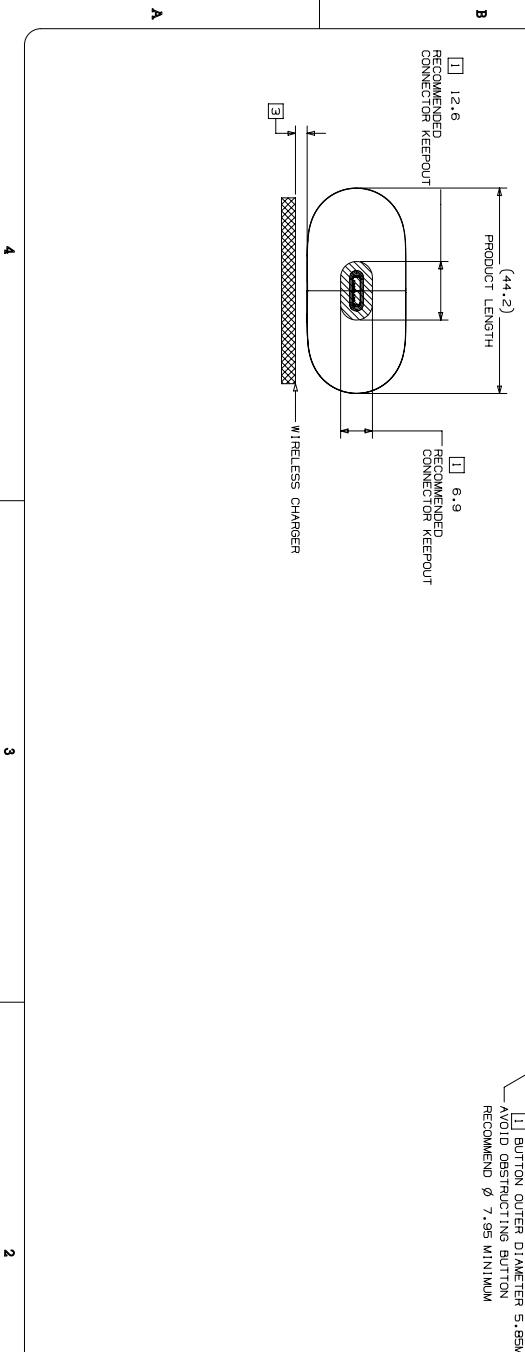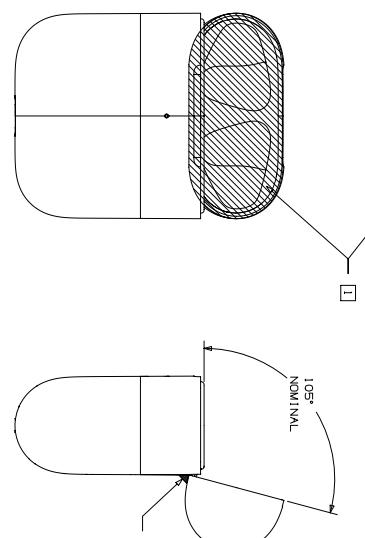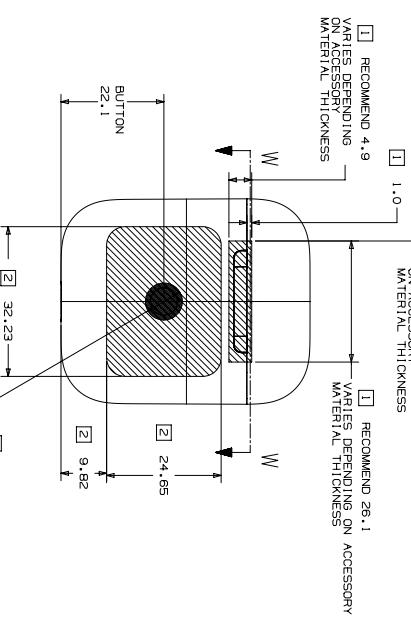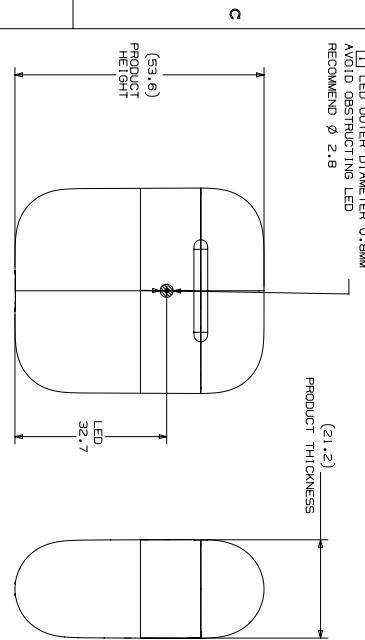

METRIC	Apple Inc.
DATE	10-28-19
REVISION	0000
APPLIES TO	10-28-19
Dimensions in millimeters	
NOTES	
Do Not Scale Drawings	Do Not Scale
Drawing Number	REV. -
Date Generated	N/A

4

3

2

N/A GENERATED


# 29.92 AirPods

**NOTES:** (UNLESS OTHERWISE SPECIFIED)

[1] ACCESSORIES INTRUDING INTO SHADED REGIONS WILL NEGATIVELY AFFECT PRODUCT PERFORMANCE.

[2] ACCESSORIES MUST NOT COVER THESE METAL SURFACES.

D

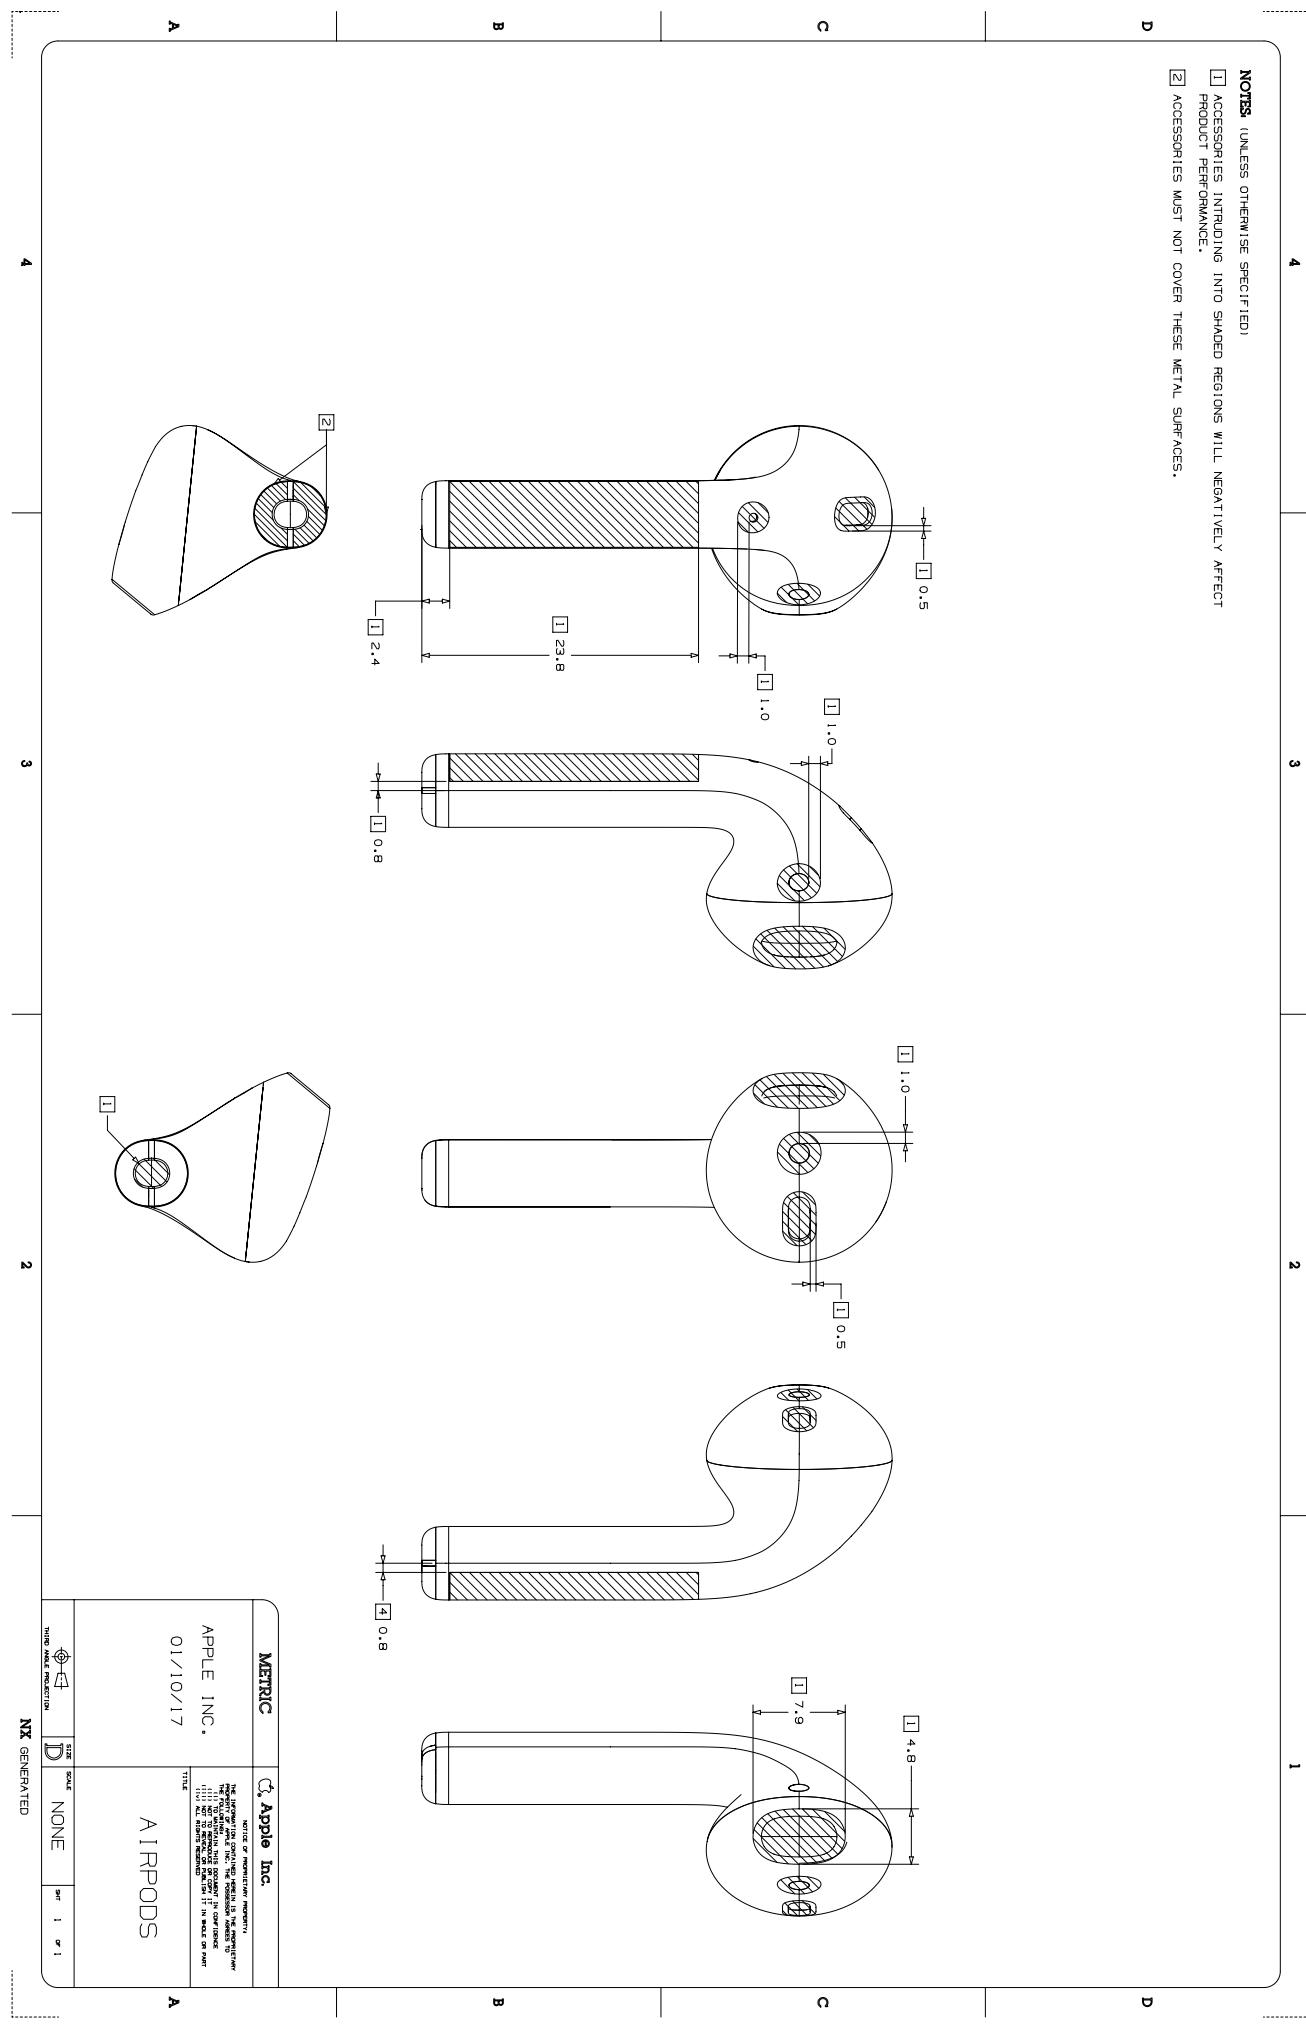

# 30. Revision History

This chapter describes changes to the Accessory Design Guidelines for Apple Devices from the previous revision.

## Added Content

- [AirPods Pro Wireless Charging Case](#) (page 218)
- [AirPods Wireless Charging Case](#) (page 219)

## Updated Content

- [Terminology](#) (page 14)
- [Over The Air \(OTA\) Transmission/Reception](#) (page 19)
- [Adapters](#) (page 52)
- [AirPods Accessories](#) (page 54)
- [iPhone 11 Pro Max](#) (page 129)
- [iPhone 11 Pro](#) (page 130)
- [iPhone 11](#) (page 131)
- [iPad \(7th generation\) 1 of 3](#) (page 147)
- [iPad \(7th generation\) 2 of 3](#) (page 148)
- [iPad \(7th generation\) 3 of 3](#) (page 149)



Apple Inc.  
Copyright © 2019 Apple Inc.  
All rights reserved

#### Terms and Conditions ("Terms")

These Guidelines are made available to you for informational purposes only. If you make or distribute any accessory for an Apple device based on or in connection with these Guidelines ("Accessories"), you agree to the following covenants, terms and conditions:

All intellectual property rights in and to the Guidelines, and all technology described therein, are retained by Apple Inc. ("Apple"). You acknowledge and agree that Apple is not granting you, and nothing contained herein shall constitute or be construed or interpreted as a grant, by implication, estoppel or otherwise, of any license, covenant, immunity, release or right under or with respect to any intellectual property rights of Apple, including without limitation any rights to make, use, have made, sell, import, or otherwise relating in any way to any Apple device or technology described in or relating to the Guidelines.

You agree to follow Apple's Guidelines For Using Apple Trademarks and Copyrights as published on Apple's website at [www.apple.com/legal/guidelinesfor3rdparties.html](http://www.apple.com/legal/guidelinesfor3rdparties.html) ("IP Guidelines") and as may be modified from time to time. You agree not to use the marks "Apple," the Apple Logo, "Mac," "iPhone," "iPod touch," "iPad," "Apple Watch," "WATCH" or any other marks belonging or licensed to Apple in any way except as expressly authorized in writing by Apple in each instance or as permitted in the IP Guidelines. You agree that all goodwill arising out of your authorized use of Apple's marks shall inure to the benefit of and belong to Apple.

You agree to indemnify, hold harmless, and, at Apple's option, defend, Apple against any claims, causes of action, losses, liabilities, damages, fines, settlements, costs, fees, and expenses (including attorney and other professional fees and expenses) arising out of: (i) your use of the Guidelines, including without limitation, any claims that any Accessory, or the combination of any Accessory with any software, technology, intellectual property, device, apparatus or assembly not supplied by Apple, infringes any patent, copyright, trade secret or other intellectual property right; (ii) the manufacture, use, promotion, distribution, sale, offer for sale, import, other distribution or exploitation or performance of any product, case, cover, band, charging stand, or other Accessory or product incorporating any Accessory, including any personal injury or product liability claims; or (iii) any failure to comply with any of the Guidelines. You will not, without Apple's prior written consent, make any admissions of liability, enter into any settlement that imposes any obligation on Apple, or publicize any settlement details relating to Apple. In addition, for any claims related to these Terms where you do not have an indemnification obligation, you shall provide all reasonable assistance to Apple and/or its counsel in connection with the defense, remedy or mitigation of such claims.

Applicable laws or regulations may impose additional restrictions or requirements on Accessories or products that incorporate the Accessories. You represent and warrant that you are in full compliance with all applicable laws, regulations, and policies in the United States and in any other location in which you engage, in whole or in part, in any activity related to the design, manufacture, marketing, sale or offer for sale, use, or other distribution of Accessories or products that incorporate the Accessories. You agree to promptly notify Apple of any complaints or threats of complaints regarding products that incorporate the Accessories with respect to any such regulatory requirements, in which case Apple may limit or terminate your ability to make, sell or purchase additional Accessories.

You expressly acknowledge and agree that access to the Guidelines is at your sole and entire risk and that you are solely responsible and liable for any harm or damage to any Apple product arising out of any breach by you of these covenants, terms and conditions. THE GUIDELINES ARE PROVIDED "AS IS" AND WITHOUT REPRESENTATION, WARRANTY, UPGRADES OR SUPPORT OF ANY KIND. APPLE AND APPLE'S DISTRIBUTORS, AFFILIATES, LICENSOR(S) AND SUPPLIER(S) ("APPLE PARTIES") EXPRESSLY DISCLAIM ALL REPRESENTATIONS, WARRANTIES AND CONDITIONS, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES AND CONDITIONS OF MERCHANTABILITY, OF SATISFACTORY QUALITY, OF FITNESS FOR A PARTICULAR PURPOSE, OF NON-INFRINGEMENT AND OF ACCURACY. NONE OF THE APPLE PARTIES WARRANTS THAT THE GUIDELINES OR ANY ACCESSORY WILL MEET YOUR REQUIREMENTS, THAT DEFECTS IN THEM WILL BE CORRECTED OR THAT THEY WILL BE COMPATIBLE WITH FUTURE APPLE PRODUCTS. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY ANY APPLE PARTY OR AN APPLE AUTHORIZED REPRESENTATIVE WILL CREATE A WARRANTY.

EXCEPT TO THE EXTENT SUCH A LIMITATION IS PROHIBITED BY LAW, IN NO EVENT WILL ANY APPLE PARTY BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, CONSEQUENTIAL, EXEMPLARY OR PUNITIVE DAMAGES, INCLUDING LOST PROFITS, LOST REVENUES OR BUSINESS INTERRUPTIONS, ARISING OUT OF OR RELATING TO THE GUIDELINES UNDER A THEORY OF CONTRACT, WARRANTY, TORT (INCLUDING NEGLIGENCE), PRODUCTS LIABILITY OR OTHERWISE, EVEN IF ANY APPLE PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, AND NOTWITHSTANDING THE FAILURE OF ESSENTIAL PURPOSE OF ANY REMEDY. IN NO EVENT WILL THE APPLE PARTIES' TOTAL LIABILITY TO YOU FOR ALL DAMAGES AND CLAIMS UNDER OR RELATED TO THE GUIDELINES EXCEED THE AMOUNT OF US\$50.00.

These Terms will be governed by and construed and enforced under the laws of the United States and the State of Delaware, except that the arbitration clause and any arbitration hereunder shall be governed by the Federal Arbitration Act, Chapters 1 and 2. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to these Terms. All disputes arising out of or in connection with these Terms shall be finally settled under the Rules of Arbitration of the International Chamber of Commerce by one arbitrator appointed in accordance with such rules, and shall be conducted according to the International Bar Association Rules on the Taking of Evidence in International Arbitration. The arbitration shall take place in San Francisco, California. The arbitration shall be conducted in English. The award shall be rendered within six months of the commencement of the arbitration, unless the arbitrator determines that the interest of justice requires that such limit be extended.